

PRODUCT RANGE SPECIFICATION

B34475 – Flat Bed Wash Trough

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B34475{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Flat-bed wash trough for shared commercial and institutional washing areas. Specify the length and fittings required for the installation. The Basterfield B34475 Flat Bed Wash Trough represents commercial washroom design, constructed from high-Grade 304 stainless steel to deliver exceptional durability and aesthetic appeal. This sophisticated wash trough system is specifically engineered for public amenities, commercial facilities, and institutional environments where both visual appeal and robust performance are paramount. The sleek, contemporary design features a shallow 50 mm deep trough profile that combines modern aesthetics with practical functionality, making it suited to high-traffic locations requiring reliable hygiene solutions. Available in three standard configurations accommodating two (1200 mm), three (1800 mm), or four (2400 mm) washing stations, this versatile trough system offers flexibility to suit various spatial requirements. The rear tapware landing provides a clean, organised installation platform for pillar taps, with standard 32 mm tapholes that can be customised to accommodate specific tapware requirements when specified at order. The trough is available in either 1.2 mm or 1.5 mm material thickness, allowing selection based on specific durability requirements and budget considerations. Installation versatility is a key feature of the B34475, with a robust 2 mm thick rear mounting bracket incorporating pre-drilled holes for secure wall mounting. The system is equally suitable for placement on granite slab tops or other solid surfaces, with optional support legs available for freestanding installations. This adaptability makes it intended for diverse applications including schools, hospitals, sports facilities, public toilets, and commercial buildings. The smooth, hygienic surface finish facilitates easy cleaning and maintenance, whilst the quality stainless steel construction ensures long-term resistance to corrosion and wear in demanding commercial environments.
---------------------	--

Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B34475 flat-bed wash trough, Grade 304 stainless steel in 1.2 mm or 1.5 mm thickness as selected. Individual tap holes and 40 mm waste outlets at the washing stations. Rear mounting bracket in 2 mm material with pre-drilled fixing holes. Length and station count as selected.
--------------------------	--

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34475(112-1200)	B34475(112-1200) Flat Bed Wash Trough Stainless Steel Two Station Stainless Steel Grade 304 1.2mm Thickness Number of Stations / Spouts: Two. Material Thickness: 1.2. Front Support Legs: No.	Front Support Legs: No Material Thickness: 1.2 mm Number of Stations / Spouts: Two

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34475(112-1200-SL)	B34475(112-1200-SL) Flat Bed Wash Trough Stainless Steel Two Station Stainless Steel Grade 304 1.2mm Thickness with Front Support Legs Number of Stations / Spouts: Two. Material Thickness: 1.2. Front Support Legs: Yes.	Front Support Legs: Yes Material Thickness: 1.2 mm Number of Stations / Spouts: Two
B34475(112-1800)	B34475(112-1800) Flat Bed Wash Trough Stainless Steel Three Station Stainless Steel Grade 304 1.2mm Thickness Number of Stations / Spouts: Three. Material Thickness: 1.2. Front Support Legs: No.	Front Support Legs: No Material Thickness: 1.2 mm Number of Stations / Spouts: Three
B34475(112-1800-SL)	B34475(112-1800-SL) Flat Bed Wash Trough Stainless Steel Three Station Stainless Steel Grade 304 1.2mm Thickness with Front Support Legs Number of Stations / Spouts: Three. Material Thickness: 1.2. Front Support Legs: Yes.	Front Support Legs: Yes Material Thickness: 1.2 mm Number of Stations / Spouts: Three
B34475(112-2400)	B34475(112-2400) Flat Bed Wash Trough Stainless Steel Four Station Stainless Steel Grade 304 1.2mm Thickness Number of Stations / Spouts: Four. Material Thickness: 1.2. Front Support Legs: No.	Front Support Legs: No Material Thickness: 1.2 mm Number of Stations / Spouts: Four
B34475(112-2400-SL)	B34475(112-2400-SL) Flat Bed Wash Trough Stainless Steel Four Station Stainless Steel Grade 304 1.2mm Thickness with Front Support Legs Number of Stations / Spouts: Four. Material Thickness: 1.2. Front Support Legs: Yes.	Front Support Legs: Yes Material Thickness: 1.2 mm Number of Stations / Spouts: Four
B34475(115-1200)	B34475(115-1200) Flat Bed Wash Trough Stainless Steel Two Station Stainless Steel Grade 304 1.5mm Thickness Number of Stations / Spouts: Two. Material Thickness: 1.5. Front Support Legs: No.	Front Support Legs: No Material Thickness: 1.5 mm Number of Stations / Spouts: Two
B34475(115-1200-SL)	B34475(115-1200-SL) Flat Bed Wash Trough Stainless Steel Two Station Stainless Steel Grade 304 1.5mm Thickness with Front Support Legs Number of Stations / Spouts: Two. Material Thickness: 1.5. Front Support Legs: Yes.	Front Support Legs: Yes Material Thickness: 1.5 mm Number of Stations / Spouts: Two

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34475(115-1800)	B34475(115-1800) Flat Bed Wash Trough Stainless Steel Three Station Stainless Steel Grade 304 1.5mm Thickness Number of Stations / Spouts: Three. Material Thickness: 1.5. Front Support Legs: No.	Front Support Legs: No Material Thickness: 1.5 mm Number of Stations / Spouts: Three
B34475(115-1800-SL)	Wash Trough Flat Bed with Tapware Landing to B34475{PSS} 1800mm Length Front Support Legs (Set of Two) Stainless Steel with Adjustable Feet	Front Support Legs: Yes Material Thickness: 1.5 mm Number of Stations / Spouts: Three
B34475(115-2400)	B34475(115-2400) Flat Bed Wash Trough Stainless Steel Four Station Stainless Steel Grade 304 1.5mm Thickness Number of Stations / Spouts: Four. Material Thickness: 1.5. Front Support Legs: No.	Front Support Legs: No Material Thickness: 1.5 mm Number of Stations / Spouts: Four
B34475(115-2400-SL)	B34475(115-2400-SL) Flat Bed Wash Trough Stainless Steel Four Station Stainless Steel Grade 304 1.5mm Thickness with Front Support Legs Number of Stations / Spouts: Four. Material Thickness: 1.5. Front Support Legs: Yes.	Front Support Legs: Yes Material Thickness: 1.5 mm Number of Stations / Spouts: Four


03 Application information


Intended applications	General Handwashing (Wash Hand Basins)
Industries	Government & Public Sector, Hospitals & Clinics

04 Supply and support

Typical lead time	10-15 working days
Warranty	12 months


Product drawings and images

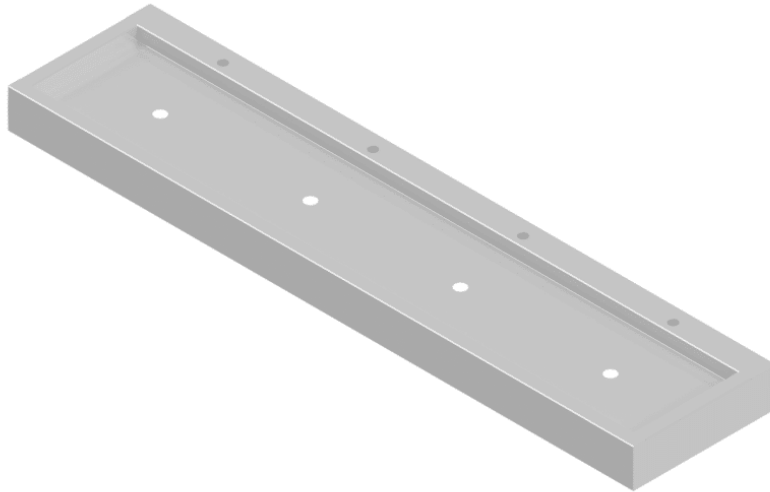**PRODUCT IMAGE**

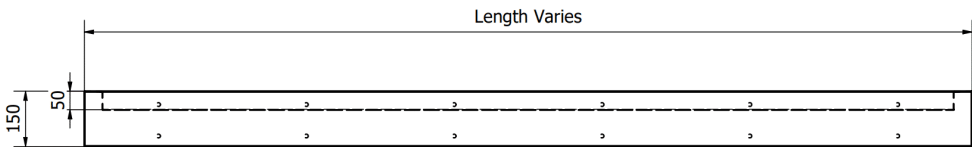


FRONT

PRODUCT IMAGE

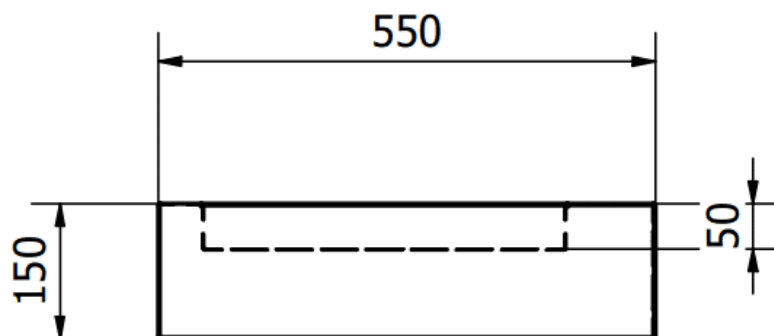


RIGHT

PRODUCT IMAGE

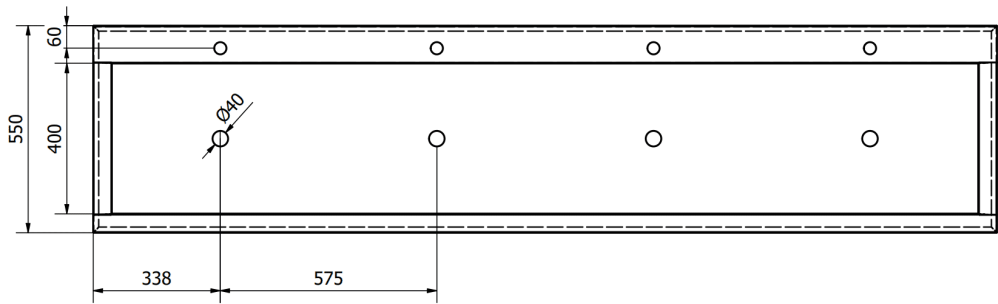

TOP

PRODUCT IMAGE

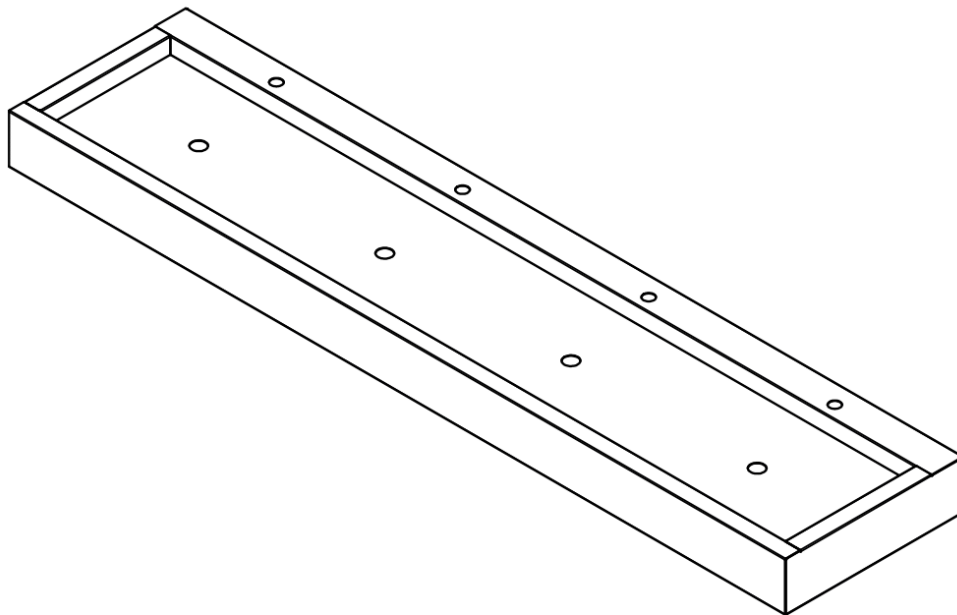

TOP RIGHT

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.