

PRODUCT RANGE SPECIFICATION

B34655 – Shrouded Wall Mounted Knee Operated Wash Trough

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	B34655{PSS}	Published catalogue data	14 Sep 2026

01 Product description and specification

Product description	Shrouded wall-mounted wash trough with knee-operated water control for handwashing in production and institutional wash areas. The trough includes a sloped 150 mm deep basin that facilitates efficient drainage and minimises splashback. A 50 mm integral splashback helps contain water spray, with an extended splashback option available. The 225 mm high stainless steel shroud conceals all plumbing, protecting it from tampering and providing a clean, professional appearance. Available in two-, three-, or four-station configurations, the unit is fitted with low-level deck-mounted spouts as standard, with optional pillar taps or pillar spouts also available. The knee-operated demand valves ensure water flows only while pressure is applied, shutting off immediately when released, promoting excellent water efficiency. A 40 mm waste outlet can be positioned either left or right as specified to suit installation requirements. The B34655 is designed for secure wall mounting using gallows brackets, with optional front support legs available to provide additional stability—particularly beneficial in high-use or heavy-duty environments.
---------------------	--

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B34655. Shrouded Wall Mounted Knee Operated Wash Trough. Waste Outlet Orientation: Left Hand, Right Hand. Number of Stations / Spouts: Two, Three, Four. Front Support Legs: No, Yes. The trough includes a sloped 150 mm deep basin that facilitates efficient drainage and minimises splashback. A 50 mm integral splashback helps contain water spray, with an extended splashback option available.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34655(1200L)	B34655(1200L) Shrouded Wall Mounted Knee Operated Wash Trough Two Station 1200mm Length Left-Hand Waste Outlet Waste Outlet Orientation: Left Hand. Number of Stations / Spouts: Two. Front Support Legs: No.	Front Support Legs: No Number of Stations / Spouts: Two Waste Outlet Orientation: Left Hand

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34655(1200LL)	B34655(1200LL) Shrouded Wall Mounted Knee Operated Wash Trough Two Station 1200mm Length Left-Hand Waste Outlet with Front Support Legs Waste Outlet Orientation: Left Hand. Number of Stations / Spouts: Two. Front Support Legs: Yes.	Front Support Legs: Yes Number of Stations / Spouts: Two Waste Outlet Orientation: Left Hand
B34655(1200R)	B34655(1200R) Shrouded Wall Mounted Knee Operated Wash Trough Two Station 1200mm Length Right-Hand Waste Outlet Waste Outlet Orientation: Right Hand. Number of Stations / Spouts: Two. Front Support Legs: No.	Front Support Legs: No Number of Stations / Spouts: Two Waste Outlet Orientation: Right Hand
B34655(1200RL)	B34655(1200RL) Shrouded Wall Mounted Knee Operated Wash Trough Two Station 1200mm Length Right-Hand Waste Outlet with Front Support Legs Waste Outlet Orientation: Right Hand. Number of Stations / Spouts: Two. Front Support Legs: Yes.	Front Support Legs: Yes Number of Stations / Spouts: Two Waste Outlet Orientation: Right Hand
B34655(1800L)	B34655(1800L) Shrouded Wall Mounted Knee Operated Wash Trough Three Station 1800mm Length Left-Hand Waste Outlet Waste Outlet Orientation: Left Hand. Number of Stations / Spouts: Three. Front Support Legs: No.	Front Support Legs: No Number of Stations / Spouts: Three Waste Outlet Orientation: Left Hand
B34655(1800LL)	B34655(1800LL) Shrouded Wall Mounted Knee Operated Wash Trough Three Station 1800mm Length Left-Hand Waste Outlet with Front Support Legs Waste Outlet Orientation: Left Hand. Number of Stations / Spouts: Three. Front Support Legs: Yes.	Front Support Legs: Yes Number of Stations / Spouts: Three Waste Outlet Orientation: Left Hand
B34655(1800R)	B34655(1800R) Shrouded Wall Mounted Knee Operated Wash Trough Three Station 1800mm Length Right-Hand Waste Outlet Waste Outlet Orientation: Right Hand. Number of Stations / Spouts: Three. Front Support Legs: No.	Front Support Legs: No Number of Stations / Spouts: Three Waste Outlet Orientation: Right Hand
B34655(1800RL)	B34655(1800RL) Shrouded Wall Mounted Knee Operated Wash Trough Three Station 1800mm Length Right-Hand Waste Outlet with Front Support Legs Waste Outlet Orientation: Right Hand. Number of Stations / Spouts: Three. Front Support Legs: Yes.	Front Support Legs: Yes Number of Stations / Spouts: Three Waste Outlet Orientation: Right Hand

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34655(2400L)	B34655(2400L) Shrouded Wall Mounted Knee Operated Wash Trough Four Station 2400mm Length Left-Hand Waste Outlet Waste Outlet Orientation: Left Hand. Number of Stations / Spouts: Four. Front Support Legs: No.	Front Support Legs: No Number of Stations / Spouts: Four Waste Outlet Orientation: Left Hand
B34655(2400LL)	B34655(2400LL) Shrouded Wall Mounted Knee Operated Wash Trough Four Station 2400mm Length Left-Hand Waste Outlet with Front-Support Legs Waste Outlet Orientation: Left Hand. Number of Stations / Spouts: Four. Front Support Legs: Yes.	Front Support Legs: Yes Number of Stations / Spouts: Four Waste Outlet Orientation: Left Hand
B34655(2400R)	B34655(2400R) Shrouded Wall Mounted Knee Operated Wash Trough Four Station 2400mm Length Right-Hand Waste Outlet Waste Outlet Orientation: Right Hand. Number of Stations / Spouts: Four. Front Support Legs: No.	Front Support Legs: No Number of Stations / Spouts: Four Waste Outlet Orientation: Right Hand
B34655(2400RL)	B34655(2400RL) Shrouded Wall Mounted Knee Operated Wash Trough Four Station 2400mm Length Right-Hand Waste Outlet with Front Support Legs Waste Outlet Orientation: Right Hand. Number of Stations / Spouts: Four. Front Support Legs: Yes.	Front Support Legs: Yes Number of Stations / Spouts: Four Waste Outlet Orientation: Right Hand


03 Application information


Intended applications	Hands-Free Handwashing (Knee/Elbow/Foot Operated)
Industries	Government & Public Sector, Research Laboratories

04 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

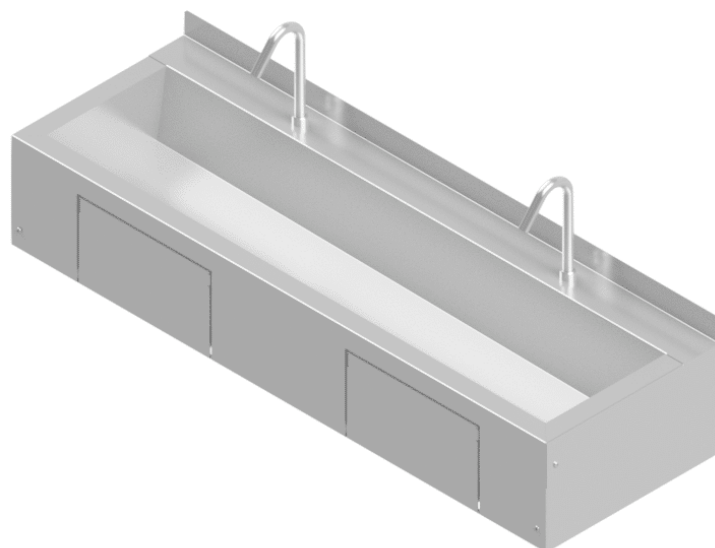
**PRODUCT IMAGE**

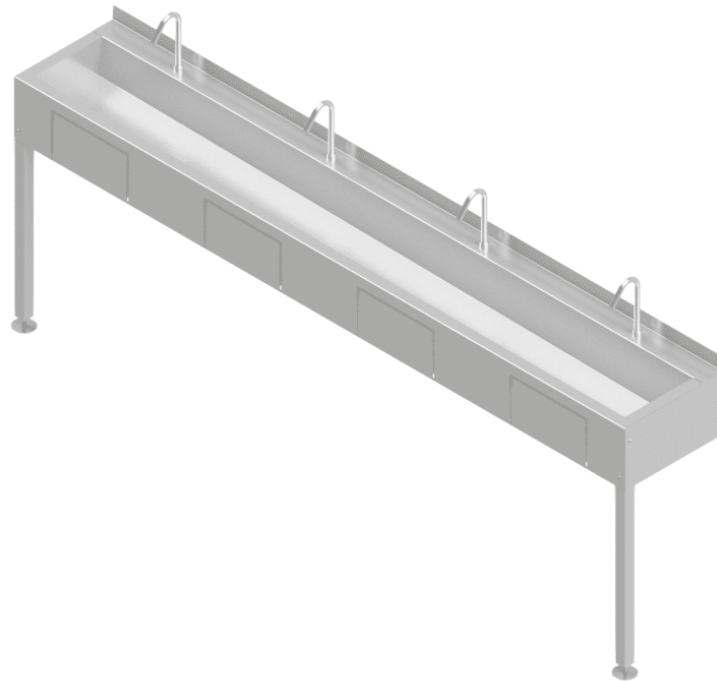

PRODUCT IMAGE

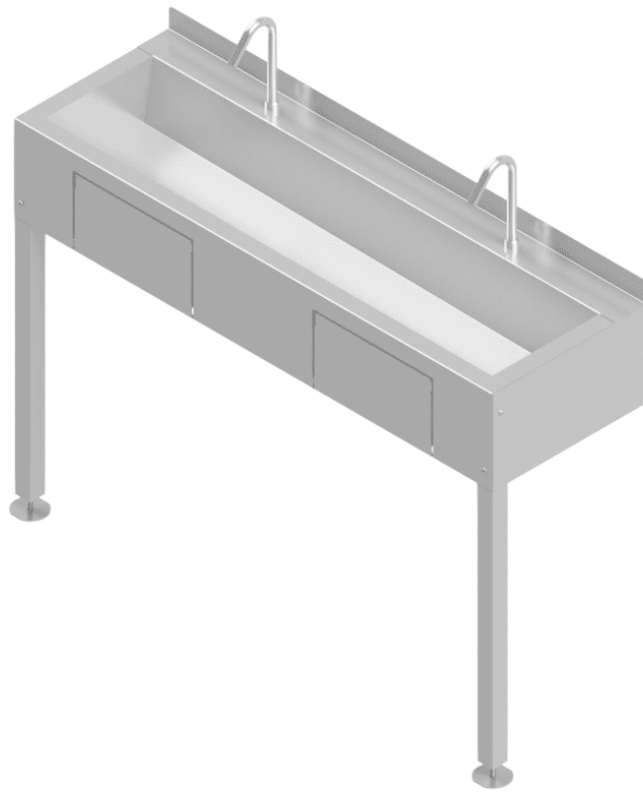

PRODUCT IMAGE

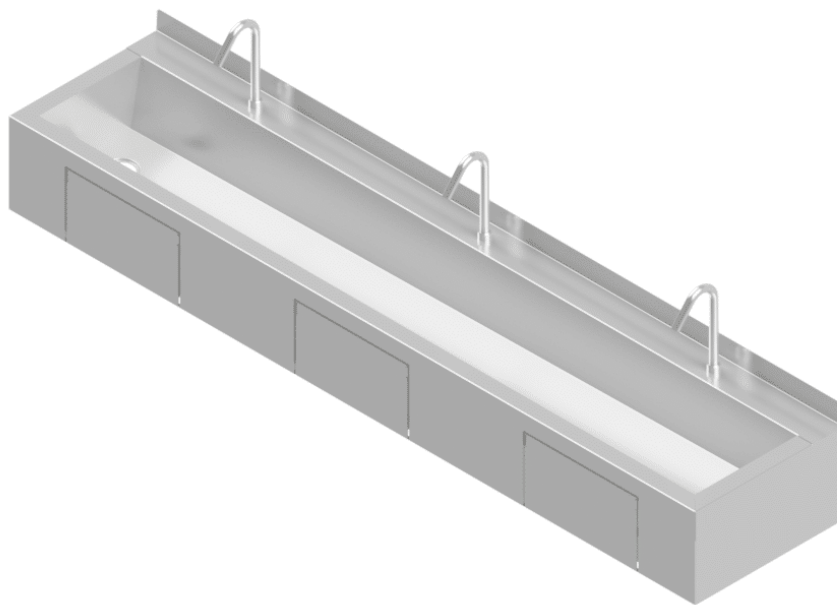

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.