PRODUCT RANGE SPECIFICATION

B34672 – Anti-Splash Wall Mounted Trough



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B34672{PSS}	13 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b34672-wash-trough-with-splash-reducing-face#specifications

01 Product description and specification

Product description	Wall-mounted Grade 304 stainless steel handwash trough with a splash-reducing front face, sloped basin and left- or right-hand waste outlet. Choose a standard 100 mm or extended 400 mm splashback. Optional front support legs are recommended for 2400 mm units and ISO walling.
Short Form Specification	**SPECIFICATION USE** Use this description when specifying this product range. Basterfield B34672 anti-splash wall-mounted handwash trough. 0.91 mm Grade 304 stainless steel; splash-reducing front face; 150 mm deep sloped basin; 40 mm left- or right-hand waste outlet; wall mounting brackets supplied. Standard 100 mm or extended 400 mm splashback. For wall-mounted or bib taps; not pillar taps. Optional front support legs are recommended for 2400 mm units and installations into ISO walling or similar panel walls. The trough still requires suitable wall mounting.

02 Configuration options

Length	900 mm; 1200 mm; 1800 mm; 2400 mm
Waste Outlet Orientation	Left Hand; Right Hand
Extended Splashback (400 mm)	No; Yes
Front Support Legs	No; Yes

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 **Splash-Reducing Front Face**
The front face helps contain splashes during handwashing.

02 **400 mm Extended Splashback**
The standard splashback is 100 mm high. The extended splashback is 400 mm high in total, not an additional 400 mm above the standard splashback.

03 **Optional Front Support Legs**

Front support legs are optional and recommended for 2400 mm units and installations into ISO walling or similar panel walls. The trough still requires suitable wall mounting. Select Front Support Legs: Yes for a complete B34672 trough configuration with support legs. These models use -SL inside the B34672 item-code brackets. The legs use 25 x 25 mm square tubular Grade 304 stainless steel with adjustable feet for levelling.

04 **Grade 304 Stainless Steel**

Manufactured from 0.91 mm Grade 304 stainless steel.

05 **Sloped Basin and Outlet Choice**

A 150 mm deep basin directs water towards a 40 mm waste outlet. Choose left-hand or right-hand outlet orientation.

06 **Wall-Mounted Installation**

Supplied with wall mounting brackets, for use with wall-mounted or bib taps. Not suitable for pillar taps.

04 Application information

Intended applications	Change Rooms & Locker Rooms, Commercial Wash Troughs & Basins, General Handwashing, Restrooms & Ablutions
Industries	Education & Training, General Manufacturing, Government & Public Sector

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

How high is the extended splashback?

The standard splashback is 100 mm high. The extended splashback is 400 mm high in total, not an additional 400 mm above the standard splashback.

When are front support legs recommended?

Optional front support legs are recommended for 2400 mm units and installations into ISO walling or similar panel walls. The trough still requires suitable wall mounting.

How are front support legs selected?

Select Front Support Legs: Yes for a complete B34672 trough configuration with support legs. These models use -SL inside the B34672 item-code brackets. The legs use 25 x 25 mm square tubular Grade 304 stainless steel with adjustable feet for levelling.

Are left-hand and right-hand outlet models priced differently?

No. Left-hand and right-hand outlets have the same price for the same trough length and splashback option.

Which taps can be used?

Use wall-mounted or bib tapware. This trough is not suitable for pillar taps.


Where can the trough be used?

Typical applications include shared handwashing points, staff washrooms, change-room wash areas and institutional ablutions.

Product drawings and images




PRODUCT IMAGE

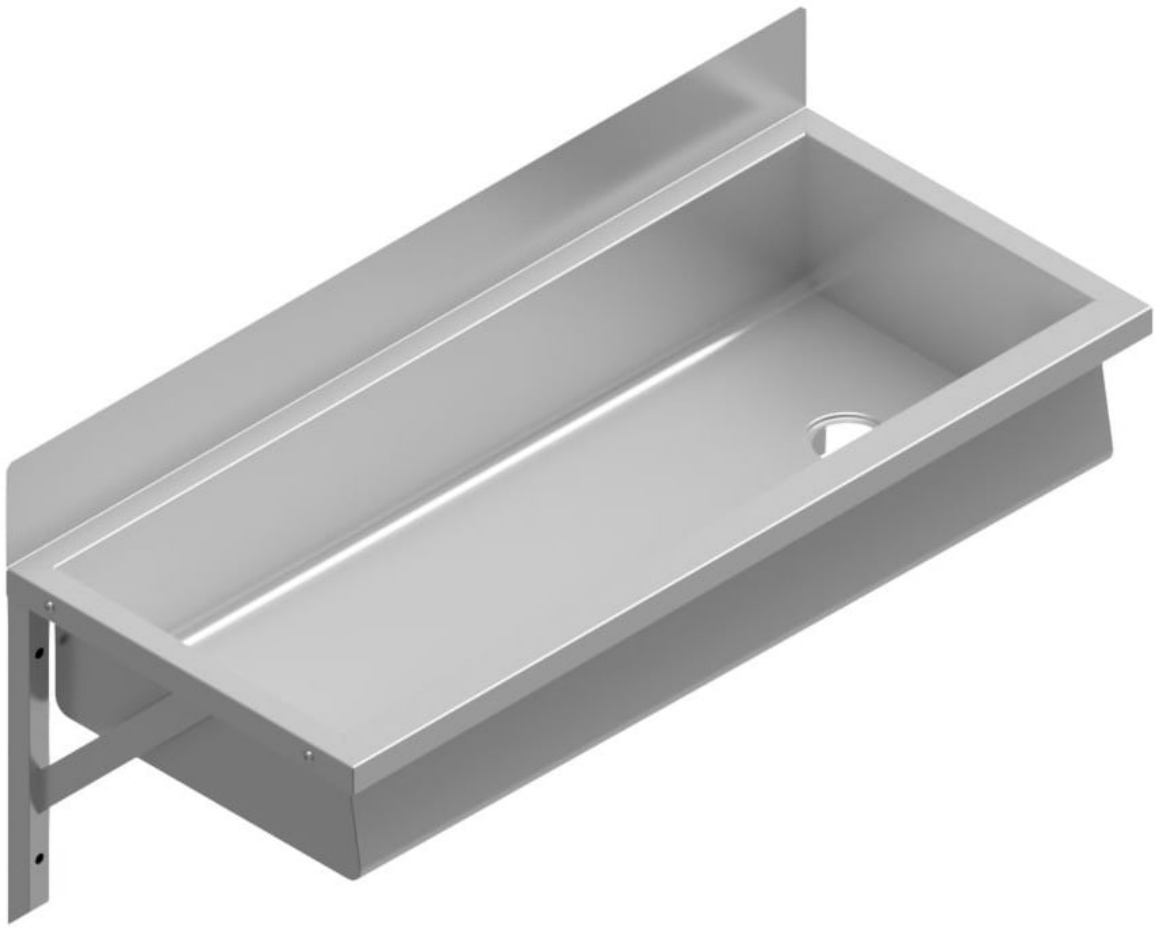

PRODUCT IMAGE




PRODUCT IMAGE

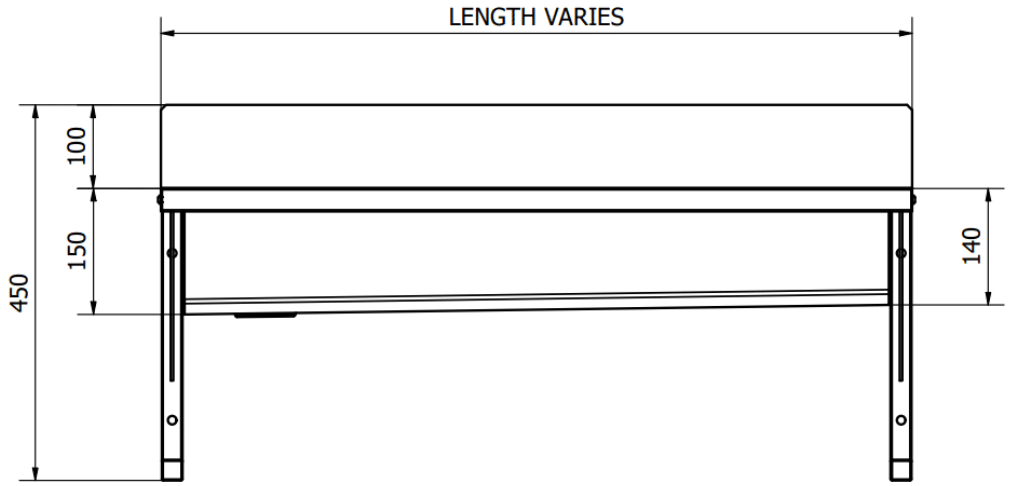


FRONT

PRODUCT IMAGE

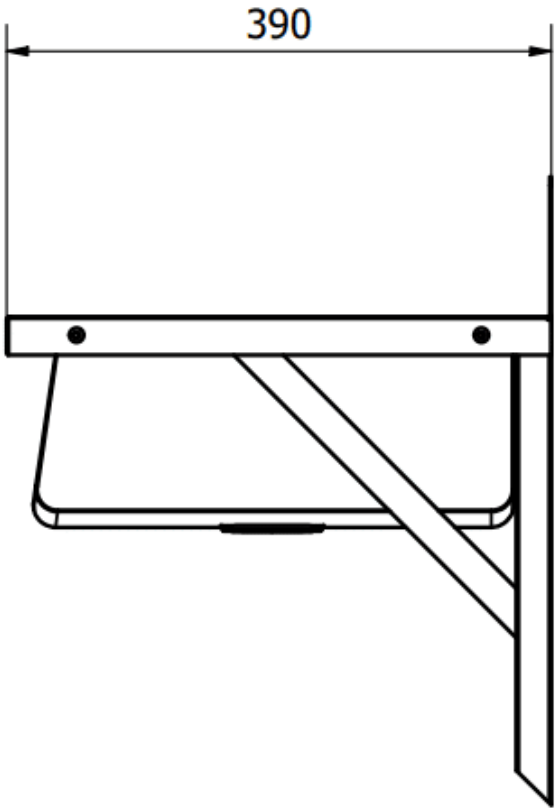

RIGHT

PRODUCT IMAGE

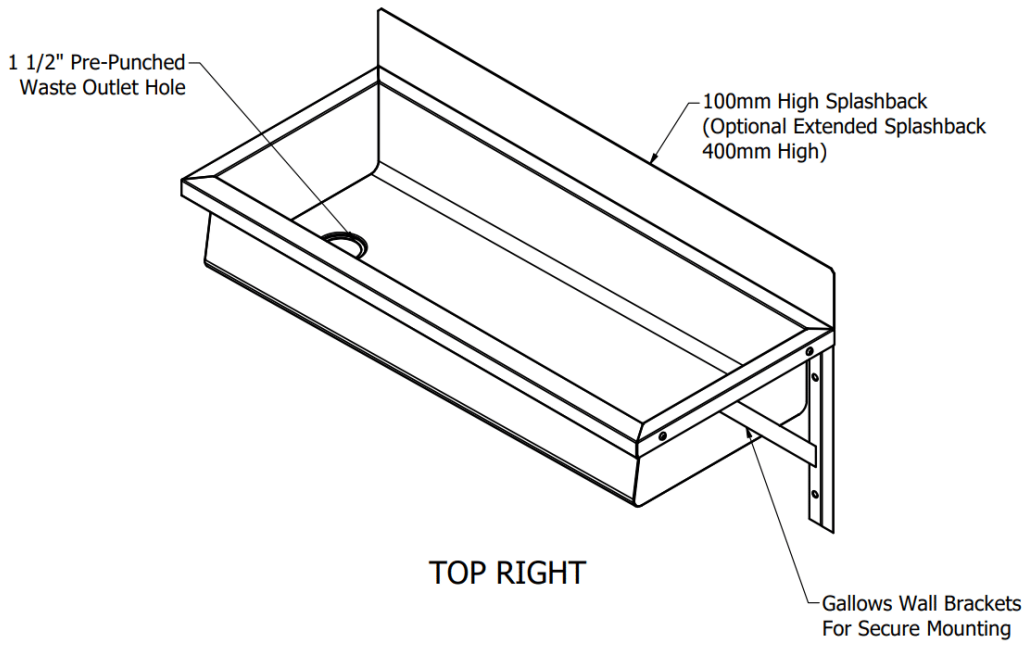

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.