

PRODUCT RANGE SPECIFICATION

B34672 – Wash Trough With Splash Reducing Face

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B34672{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Wash trough with a splash-reducing face for commercial, industrial and institutional handwashing areas. Manufactured from high-Grade 304 stainless steel with a 0.91 mm thickness, the unit is built to withstand rigorous daily use while offering excellent corrosion resistance and long-term durability. The trough basin is 150 mm deep with an integrated slope that directs water toward a 40 mm waste outlet, available in either left-hand or right-hand configurations for installation flexibility. The unit includes a standard 100 mm high splashback, with an optional extended 400 mm high splashback available for enhanced hygiene control. It is specifically designed for wall-mounted or bib tapware and is not suited for pillar taps. The unit is supplied with robust wall mounting brackets for easy installation. Designed for practicality and hygiene, the B34672 offers a cost-effective and easy-to-clean washing station suited to institutional and industrial use.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B34672. Wash Trough With Splash Reducing Face. Length: 900 mm, 1200 mm, 2400 mm, 1800 mm. Waste Outlet Orientation: Left Hand, Right Hand. Extended Splashback: No, Yes. Manufactured from high-Grade 304 stainless steel with a 0.91 mm thickness, the unit is built to withstand rigorous daily use while offering excellent corrosion resistance and long-term durability. The unit includes a standard 100 mm high splashback, with an optional extended 400 mm high splashback available for enhanced hygiene control.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34672(0900L)	Wash Trough W/M with Splash Reducing Face 900mm L	Extended Splashback: No Length: 900 mm Waste Outlet Orientation: Left Hand
B34672(0900LE)	B34672(0900LE) Anti-Splash Wall Mounted Wash Trough 900mm Length Left-Hand Waste Outlet With 400mm Extended Splashback Length: 900. Waste Outlet Orientation: Left Hand. Extended Splashback: Yes.	Extended Splashback: Yes Length: 900 mm Waste Outlet Orientation: Left Hand

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34672(0900RE)	B34672(0900RE) Anti-Splash Wall Mounted Wash Trough 900mm Length Right-Hand Waste Outlet With 400mm Extended Splashback Length: 900. Waste Outlet Orientation: Right Hand. Extended Splashback: Yes.	Extended Splashback: Yes Length: 900 mm Waste Outlet Orientation: Right Hand
B34672(109-0900R)	WASH TROUGH WALL MOUNTED WITH SPLASH REDUCING FACE 900 RH OUTLET	Extended Splashback: No Length: 900 mm Waste Outlet Orientation: Right Hand
B34672(109-1200L)	WASH TROUGH WM WITH SPLASH REDUCING FACE 1200L	Extended Splashback: No Length: 1200 mm Waste Outlet Orientation: Left Hand
B34672(109-2400R)	WASH TROUGH WALL MOUNTED WITH SPLASH REDUCING FACE 2400 RH OUTLET	Extended Splashback: No Length: 2400 mm Waste Outlet Orientation: Right Hand
B34672(1200LE)	B34672(1200LE) Anti-Splash Wall Mounted Wash Trough 1200mm Length Left-Hand Waste Outlet with 400mm Extended Splashback Length: 1200. Waste Outlet Orientation: Left Hand. Extended Splashback: Yes.	Extended Splashback: Yes Length: 1200 mm Waste Outlet Orientation: Left Hand
B34672(1200R)	WASH TROUGH WALL MOUNTED WITH SPLASH REDUCING FACE 1200 RH OUTLET	Extended Splashback: No Length: 1200 mm Waste Outlet Orientation: Right Hand
B34672(1200RE)	B34672(1200RE) Anti-Splash Wall Mounted Wash Trough 1200mm Length Right-Hand Waste Outlet with 400mm Extended Splashback Length: 1200. Waste Outlet Orientation: Right Hand. Extended Splashback: Yes.	Extended Splashback: Yes Length: 1200 mm Waste Outlet Orientation: Right Hand
B34672(1800L)	WASH TROUGH WALL MOUNTED WITH SPLASH REDUCING FACE 1800 LH OUTLET	Extended Splashback: No Length: 1800 mm Waste Outlet Orientation: Left Hand
B34672(1800LE)	B34672(1800LE) Anti-Splash Wall Mounted Wash Trough 1800mm Length Left-Hand Waste Outlet with 400mm Extended Splashback Length: 1800. Waste Outlet Orientation: Left Hand. Extended Splashback: Yes.	Extended Splashback: Yes Length: 1800 mm Waste Outlet Orientation: Left Hand
B34672(1800R)	WASH TROUGH WALL MOUNTED WITH SPLASH REDUCING FACE 1800 RH OUTLET	Extended Splashback: No Length: 1800 mm Waste Outlet Orientation: Right Hand
B34672(1800RE)	B34672(1800RE) Anti-Splash Wall Mounted Wash Trough 1800mm Length Right-Hand Waste Outlet with 400mm Extended Splashback Length: 1800. Waste Outlet Orientation: Right Hand. Extended Splashback: Yes.	Extended Splashback: Yes Length: 1800 mm Waste Outlet Orientation: Right Hand

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34672(2400L)	Wash Trough Wall Mounted with Splash Reducing	Extended Splashback: No Length: 2400 mm Waste Outlet Orientation: Left Hand
B34672(2400LE)	B34672(2400LE) Anti-Splash Wall Mounted Wash Trough 2400mm Length Left-Hand Waste Outlet with 400mm Extended Splashback Length: 2400. Waste Outlet Orientation: Left Hand. Extended Splashback: Yes.	Extended Splashback: Yes Length: 2400 mm Waste Outlet Orientation: Left Hand
B34672(2400RE)	B34672(2400RE) Anti-Splash Wall Mounted Wash Trough 2400mm Length Right-Hand Waste Outlet with 400mm Extended Splashback Length: 2400. Waste Outlet Orientation: Right Hand. Extended Splashback: Yes.	Extended Splashback: Yes Length: 2400 mm Waste Outlet Orientation: Right Hand

03 Application information

Intended applications	General Handwashing (Wash Hand Basins)
Industries	Government & Public Sector

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months


Product drawings and images



PRODUCT IMAGE




PRODUCT IMAGE

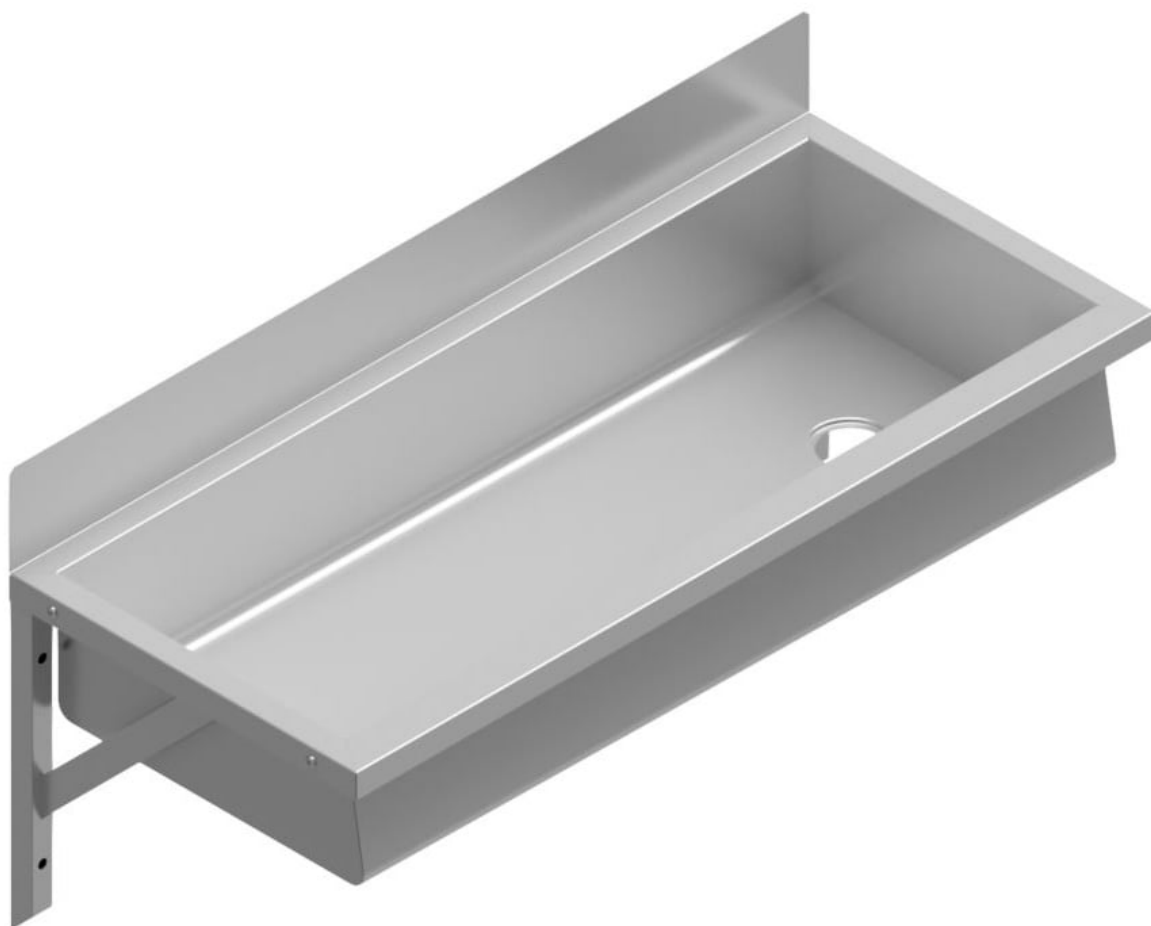

PRODUCT IMAGE




PRODUCT IMAGE

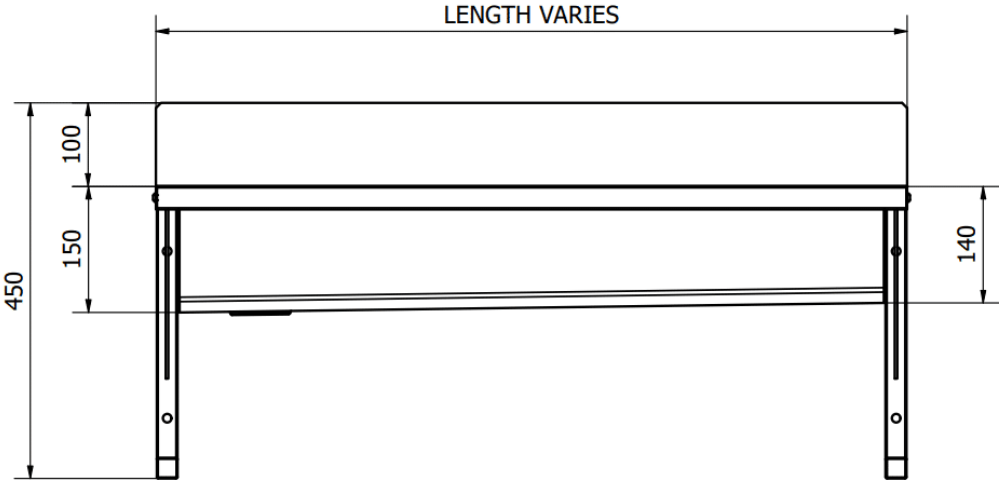


FRONT

PRODUCT IMAGE

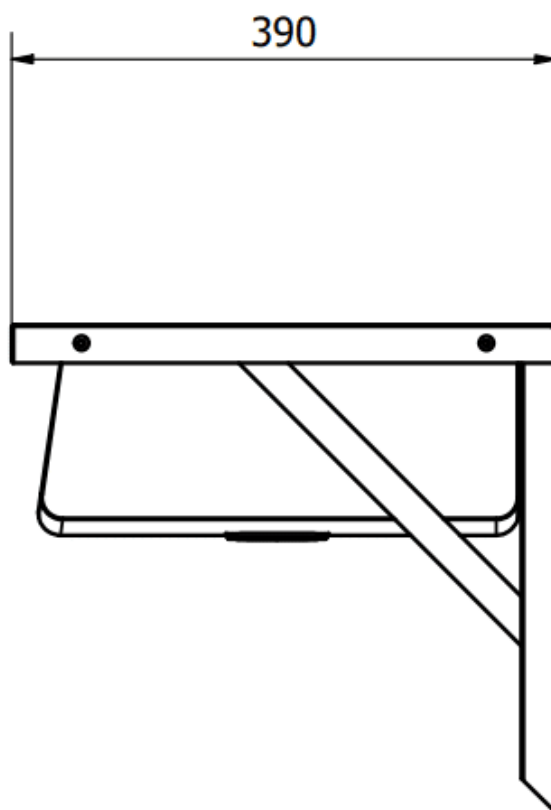

RIGHT

PRODUCT IMAGE

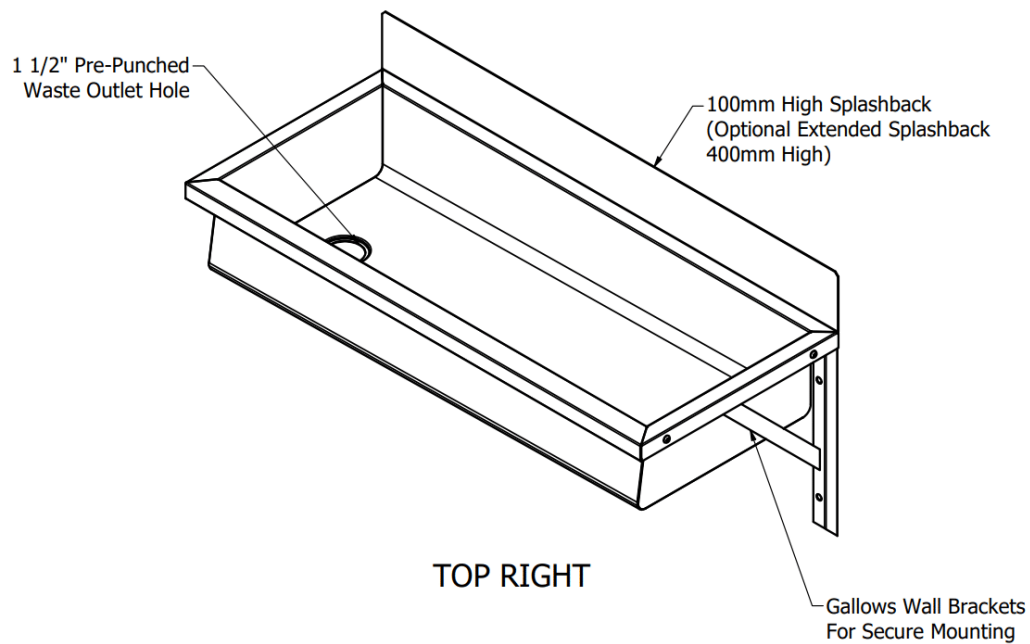

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.