

PRODUCT RANGE SPECIFICATION

B34681(SC-112-0650) – Wall-Mounted Single-Bowl Medical Wash Basin

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	B34681(SC-112-0650){PSS}	Published catalogue data	14 Sep 2026

01 Product description and specification

Product description	Wall-mounted single-bowl medical basin for clinical handwashing areas and individual washing stations. Manufactured from Grade 304 stainless steel with a robust 1.2 mm thick construction, this single-bowl basin delivers exceptional durability, superior corrosion resistance, and uncompromising hygiene standards essential for healthcare settings. This purpose-built medical basin features a generously proportioned centre-oriented bowl measuring 450 mm (L) x 400 mm (W) x 250 mm (D), optimally sized for thorough handwashing procedures in medical environments. The compact 650 mm overall length makes it suited to space-conscious installations whilst maintaining full functionality. Engineered for secure wall-mounted installation, the basin comes complete with heavy-duty gallows brackets that ensure stability and optimal space efficiency in clinical environments. The bowl features a standard 40 mm waste outlet for efficient drainage, preventing water accumulation and maintaining hygienic conditions.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B34681(SC-112-0650). Wall-Mounted Single-Bowl Medical Wash Basin. This purpose-built medical basin features a generously proportioned centre-oriented bowl measuring 450 mm (L) x 400 mm (W) x 250 mm (D), optimally sized for thorough handwashing procedures in medical environments. The compact 650 mm overall length makes it suited to space-conscious installations whilst maintaining full functionality.

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B34681(SC-112-0650)	The B34681(SC-112-0650) Medical Basin represents the pinnacle of healthcare-grade washing facilities, engineered specifically for demanding medical, laboratory, and clinical environments. Manufactured from premium Grade 304 stainless steel with a robust 1.2mm thick construction, this single-bowl basin delivers exceptional durability, superior corrosion resistance, and uncompromising hygiene standards essential for healthcare settings. The marine edge design effectively contains water and splashes within the basin area, whilst the integrated 150mm rear splashback provides comprehensive protection for surrounding wall surfaces, maintaining the sterile integrity of medical facilities. This purpose-built medical basin features a generously proportioned centre-oriented bowl measuring 450mm (L) x 400mm (W) x 250mm (D), optimally sized for thorough handwashing procedures in medical environments. The compact 650mm overall length makes it ideal for space-conscious installations whilst maintaining full functionality. The dedicated tapware landing accommodates various medical-grade tapware options, including hands-free sensor taps and elbow-operated fixtures, ensuring compliance with infection control protocols. The thoughtful design incorporates smooth, crevice-free surfaces with radiused internal corners, facilitating easy cleaning and preventing bacterial harbourage. Engineered for secure wall-mounted installation, the basin comes complete with heavy-duty gallows brackets that ensure stability and optimal space efficiency in clinical environments. The bowl features a standard 40mm waste outlet for efficient drainage, preventing water accumulation and maintaining hygienic conditions. Ideal for installation in hospitals, consulting rooms, treatment areas, laboratories, and specialist medical facilities, this medical basin meets stringent healthcare standards whilst providing reliable, long-lasting performance in demanding professional environments where space-efficient handwashing stations are required.	Standard configuration

03 Application information


Intended applications	Hands-Free Handwashing (Knee/Elbow/Foot Operated)
-----------------------	---

Industries	Hospitals & Clinics, Research Laboratories
------------	--


04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

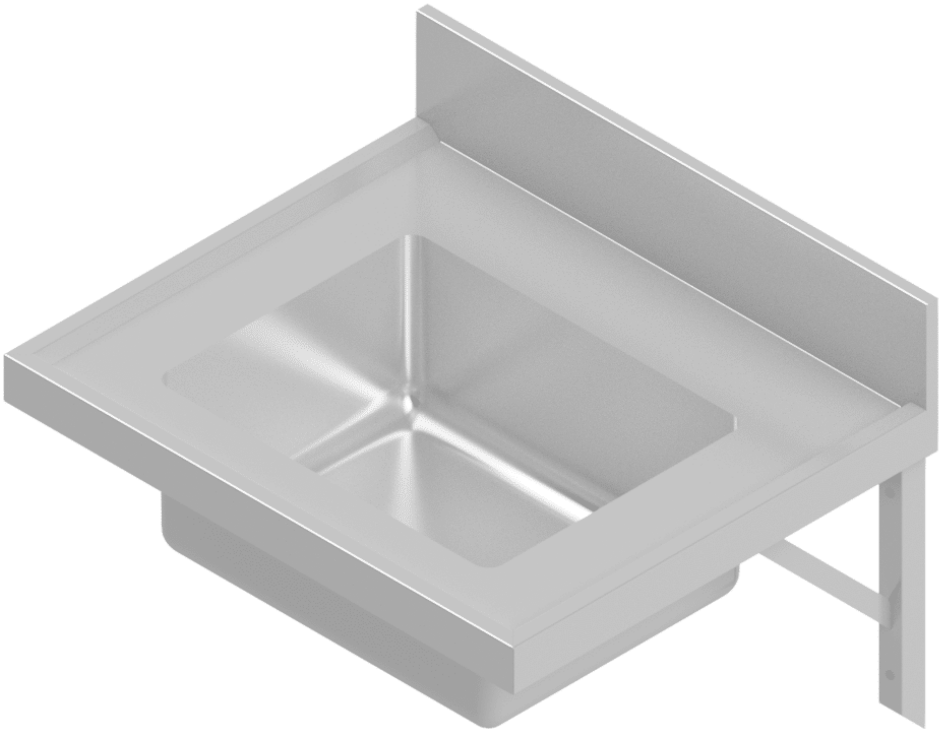

PRODUCT IMAGE

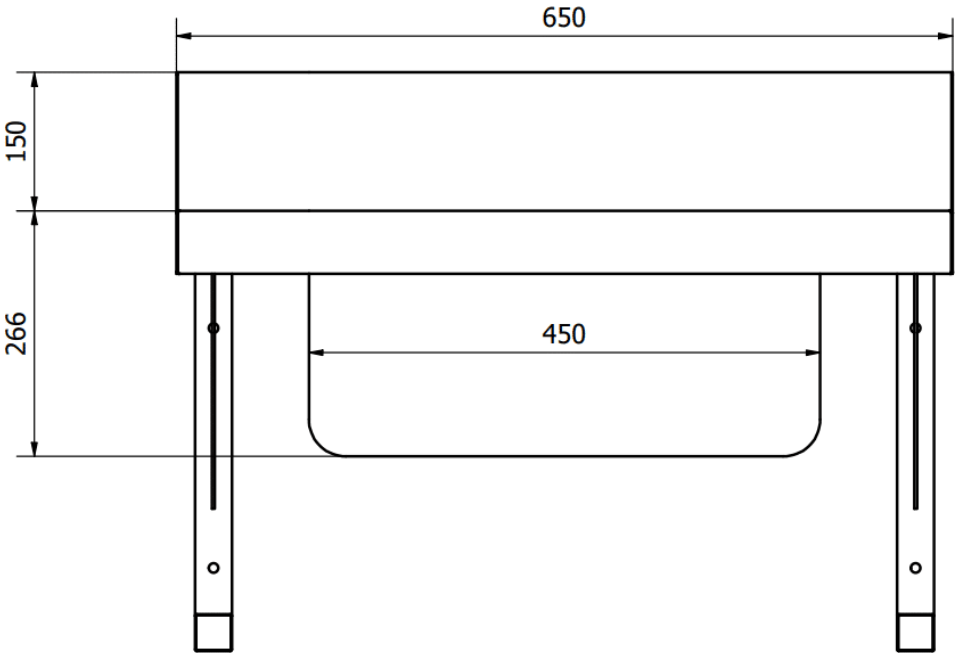

FRONT

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.