

PRODUCT RANGE SPECIFICATION

B35345 – Blanket Wash Troughs



PRODUCT IMAGE · Blanket wash trough on stand

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

B35345{PSS}

DATA STATUS

Published catalogue data

GENERATED ON

4 Oct 2026

01 Product description and specification

Product description

The B35345 blanket wash trough is designed for hospital laundries and institutional laundry washing areas. It is manufactured from Grade 304 stainless steel and supplied on a fully welded stainless steel tubular stand with adjustable feet.

The B35345(112-1100) model measures 1100 mm long x 450 mm wide, with a 400 mm deep bowl. The working height to the trough rim is 900 mm. A 150 mm rear splashback brings the overall height to 1050 mm.

This model has a 40 mm waste and an approximate weight of 25 kg. It is supplied without tapware; a medical mixer tap is available as an optional extra.

Designed and manufactured in South Africa.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Shall be Basterfield B35345(112-1100) blanket wash trough on a stand to B35345(112-1100){PSS}, manufactured from Grade 304 stainless steel. 1100 mm (L) x 450 mm (W), with a 400 mm deep bowl, 900 mm working height and 150 mm rear splashback, giving 1050 mm overall height. Supplied on a fully welded stainless steel tubular frame with adjustable feet and a 40 mm waste. Approximate weight 25 kg. Supplied without tapware; medical mixer tap optional. Designed and manufactured in South Africa.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B35345(112-1100)	Blanket Wash Trough on Stand to B35345(112-1100){PSS}, Grade 304 Stainless Steel. 1100 mm (L) x 450 mm (W), 900 mm Working Height, 1050 mm Overall Height Including 150 mm Rear Splashback. Bowl Depth 400 mm; 40 mm Waste. Fully Welded Stainless Steel Tubular Stand with Adjustable Feet. Tapware Optional.	Overall dimensions: 1100 x 450 x 1050 mm (L x W x H) Mass: 25 kg

03 Functional features

01	Grade 304 Stainless Steel AISI 304 stainless steel trough for hospital laundry washing areas.
02	400 mm Deep Bowl The 1100 mm model has a 400 mm deep bowl within a 1100 x 450 mm footprint.
03	Welded Tubular Stand Supplied on a fully welded stainless steel tubular support frame.
04	Adjustable Feet Adjustable feet allow the stand to be levelled during installation.
05	Rear Splashback The 1100 mm model has a 150 mm rear splashback: 900 mm working height and 1050 mm overall height.
06	Optional Tapware Supplied without tapware. A medical mixer tap is available separately.


04 Application information

Intended applications	Laundry & Blanket Washing
Industries	Commercial Laundries, Government & Public Sector, Hospitals & Clinics


05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

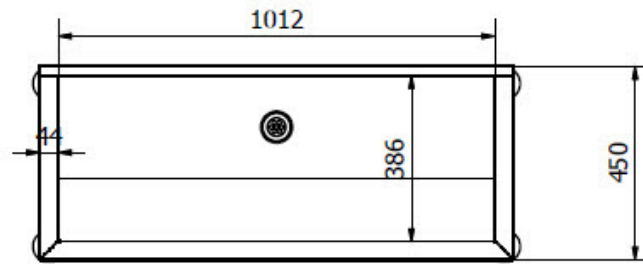


TOP

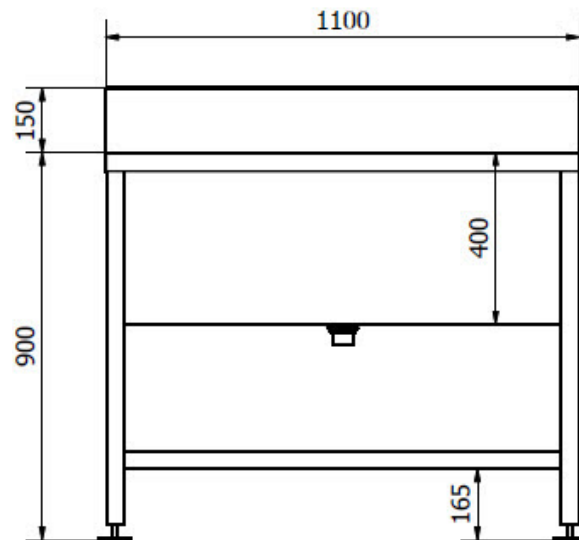

FRONT

OTHER VIEW · Top and front views

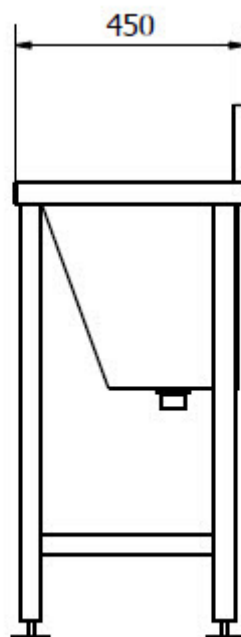**RIGHT****RIGHT VIEW** · Right-side view

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.