

PRODUCT RANGE SPECIFICATION

B35478 – Security Wash Trough

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B35478{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Security wash trough for shared handwashing facilities in correctional and institutional environments. The trough is 600 × 550 × 450 mm with a fully welded basin 500 × 450 × 240 mm in size. The basin features a perforated waste welded in place to protect against removal. An integral waste outlet pipe is included and can be optionally extended 250 mm out the back for connection in a duct-type installation or to the rear of the wall. The trough is supplied with a mounting frame with threaded rods for connection through the wall. This ensures that there are no connections accessible within the room and all fixations are included to the rear of the wall. The unit is manufactured from heavy-duty Stainless-Steel Grade 304 1.2 mm thick.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B35478. Security Wash Trough. The trough is 600 × 550 × 450 mm with a fully welded basin 500 × 450 × 240 mm in size. An integral waste outlet pipe is included and can be optionally extended 250 mm out the back for connection in a duct-type installation or to the rear of the wall.

02 Models and configurations


MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B35478	The B35478 Security Wash Trough Single is a robust trough that incorporates a high-security, anti-vandal design. The trough is 600x 550 x 450 mm with a fully welded basin 500 x 450 x 240 mm in size. The basin features a perforated waste welded in place to protect against removal. An integral waste outlet pipe is included and can be optionally extended 250mm out the back for connection in a duct-type installation or to the rear of the wall. The trough is supplied with a mounting frame with threaded rods for connection through the wall. This ensures that there are no connections accessible within the room and all fixations are included to the rear of the wall. The unit is manufactured from heavy-duty Stainless-Steel Grade 304 1.2mm thick.	Standard configuration

03 Application information

Intended applications	General Handwashing (Wash Hand Basins)
Industries	Correctional Services

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

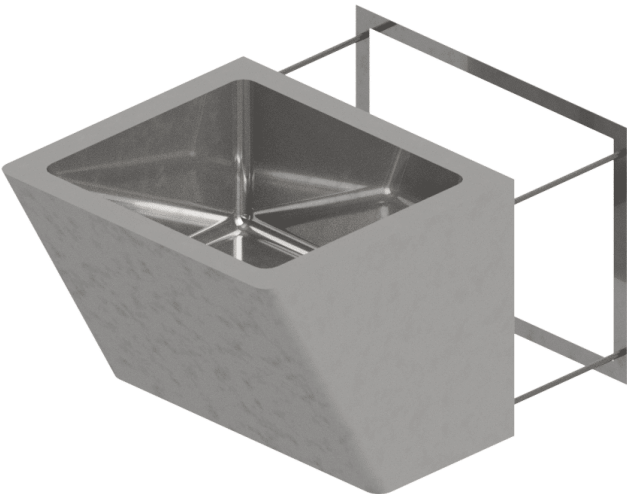

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.