

PRODUCT RANGE SPECIFICATION

B36150 – Recessed Stainless Steel Hand Wash Basin and Drinking Fountain



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

B36150{PSS}

DATA STATUS

Published catalogue data

GENERATED ON

25 Oct 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.
<https://basterfield.co.za/products/b36150-recessed-stainless-steel-hand-wash-basin-and-drinking-fountain#specifications>



01 Product description and specification

Product description

Recessed Grade 304 stainless steel handwash basin and drinking fountain, supplied fitted with a Walcro 101R chrome-plated DZR brass self-closing metered bib tap.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B36150 recessed handwash basin and drinking fountain; heavy-duty Grade 304 stainless steel; brushed finish; 490 x 370 x 125 mm; 40 mm waste; approximately 4 kg; supplied fitted with a Walcro 101R chrome-plated DZR brass self-closing metered bib tap; drinking spout and concealed fittings; drawing reference B36150{PSS}.

02 Functional features

01 Handwashing and drinking point

Combines a handwash basin and drinking fountain in one compact recessed fixture.

02 Walcro 101R tap included

Supplied fitted with a Walcro 101R chrome-plated DZR brass self-closing metered bib tap.

03 Grade 304 stainless steel

Heavy-duty Grade 304 stainless steel construction with a brushed finish.

04 Recessed installation

Designed for recessed mounting with concealed fittings for a clean installation.

05 Compact 490 x 370 x 125 mm size

The supplied specification gives overall dimensions of 490 mm long x 370 mm wide x 125 mm high.

06 40 mm waste outlet


Prepared for a 40 mm waste connection as stated on B36150{PSS}.

Intended applications	Commercial Wash Troughs & Basins, General Handwashing, Secure Ablutions
Industries	Government & Public Sector, Prisons & Detention Facilities

04 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

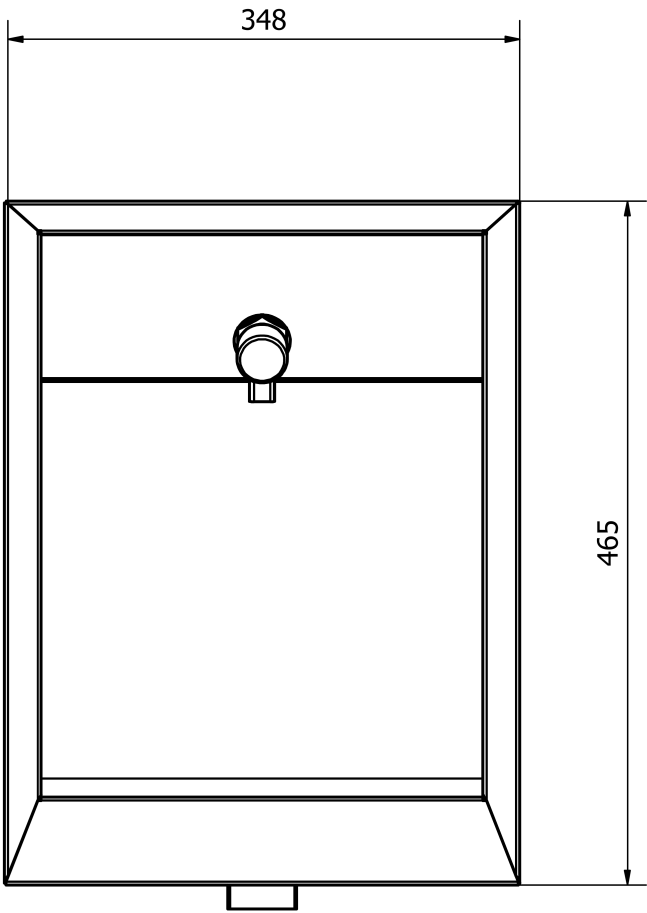


FRONT (1 : 4)

FRONT VIEW · Front elevation - B36150

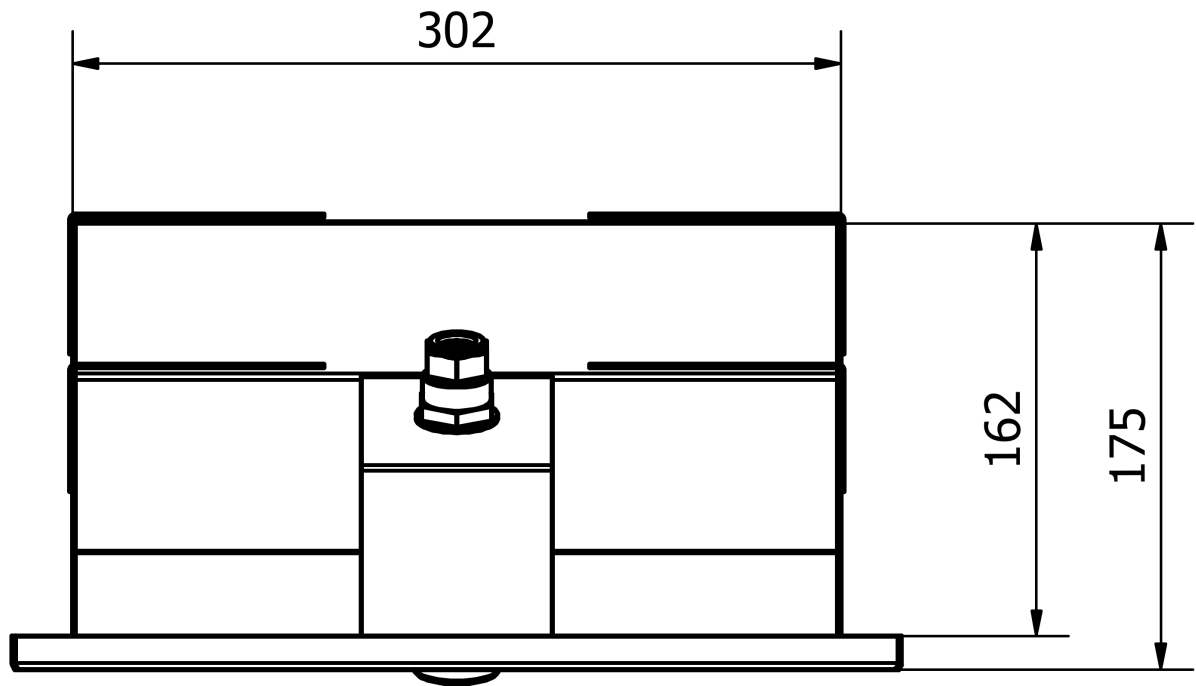


TOP (1 : 4)

TOP VIEW · Top view - B36150

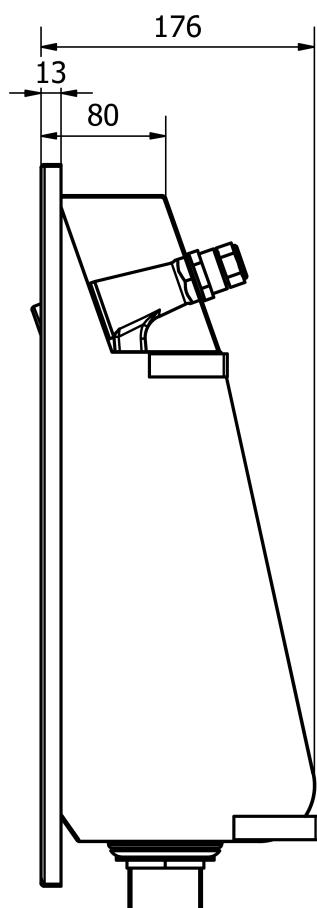

RIGHT (1 : 4)

RIGHT VIEW · Right elevation – B36150

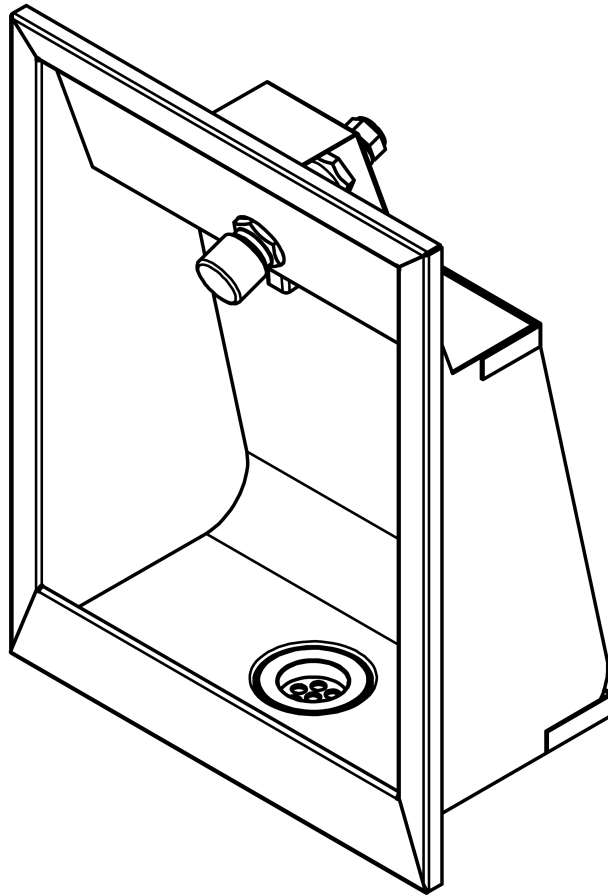

TOP RIGHT (1 : 4)

ISOMETRIC VIEW · Top-right isometric view – B36150

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.