

PRODUCT RANGE SPECIFICATION

B36658 – Stainless Steel Knee Activated Wash Hand Basin



PRODUCT IMAGE · B36658(D) demand model with 50mm standard splashback.

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

B36658{PSS}

DATA STATUS

Published catalogue data

GENERATED ON

24 Oct 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

<https://basterfield.co.za/products/b36658-stainless-steel-knee-activated-wash-hand-basin#specifications>



01 Product description and specification

Product description

Make hands-free handwashing easy in busy workplaces. This knee-operated stainless steel basin is a practical choice for commercial kitchens, food preparation areas and staff wash stations.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B36658 wall-mounted knee-operated wash hand basin in Grade 304 stainless steel with 0.9mm main construction, Easy Push front panel, aerated gooseneck spout and mounting bracket. Pre-punched 40mm waste outlet and 15mm water inlet. D and M models have a 50mm standard splashback; DE and ME models have an extended splashback. Demand activation is standard; metered activation is available under advanced customisation. Thermostatic mixing valve optional and supplied separately.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	—	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Material Thickness	0.9	mm	Thickness of the main construction. Individual components may differ.
Waste Outlet Diameter	40	mm	Pre-punched waste outlet in the basin.
Inlet Diameter	15	mm	Water inlet connection size.

03 Configuration options

Extended Splashback	No; Yes
---------------------	---------

Options vary by model; not every combination is available. Use the product page to select a model.

04 Functional features


01	Knee-operated Easy Push panel Operate the front panel with either knee to keep both hands free for washing.
02	Aerated gooseneck spout A gooseneck spout delivers aerated water into the handwashing basin.
03	Grade 304 stainless steel construction Grade 304 stainless steel with 0.9mm main construction for commercial and workplace handwashing points.
04	Wall mounting bracket The easy-mount bracket includes multiple fixing holes for wall installation.
05	Extended splashback option D and M models have a 50mm standard splashback. DE and ME models include the extended stainless steel splashback.
06	Demand or metered control Demand valve activation is standard. Metered valve activation is available through advanced customisation.
07	Optional Pre-Tempered Water An Advanced Ø22mm thermostatic mixing valve is available as a separately priced optional extra for a pre-tempered water supply.

05 Application information


Intended applications	Change Rooms & Locker Rooms, Commercial Wash Troughs & Basins, Hands-Free Handwashing
Industries	Bakeries, Dairy & Beverage Processing, Fish & Seafood Processing, Food & Beverage Processing, Fresh Produce & Packhouses, Government & Public Sector, Hospitality & Foodservice, Hospitals & Clinics, Institutional & Contract Catering, Meat & Poultry Processing, Research Laboratories, Restaurants & Cafés

06 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

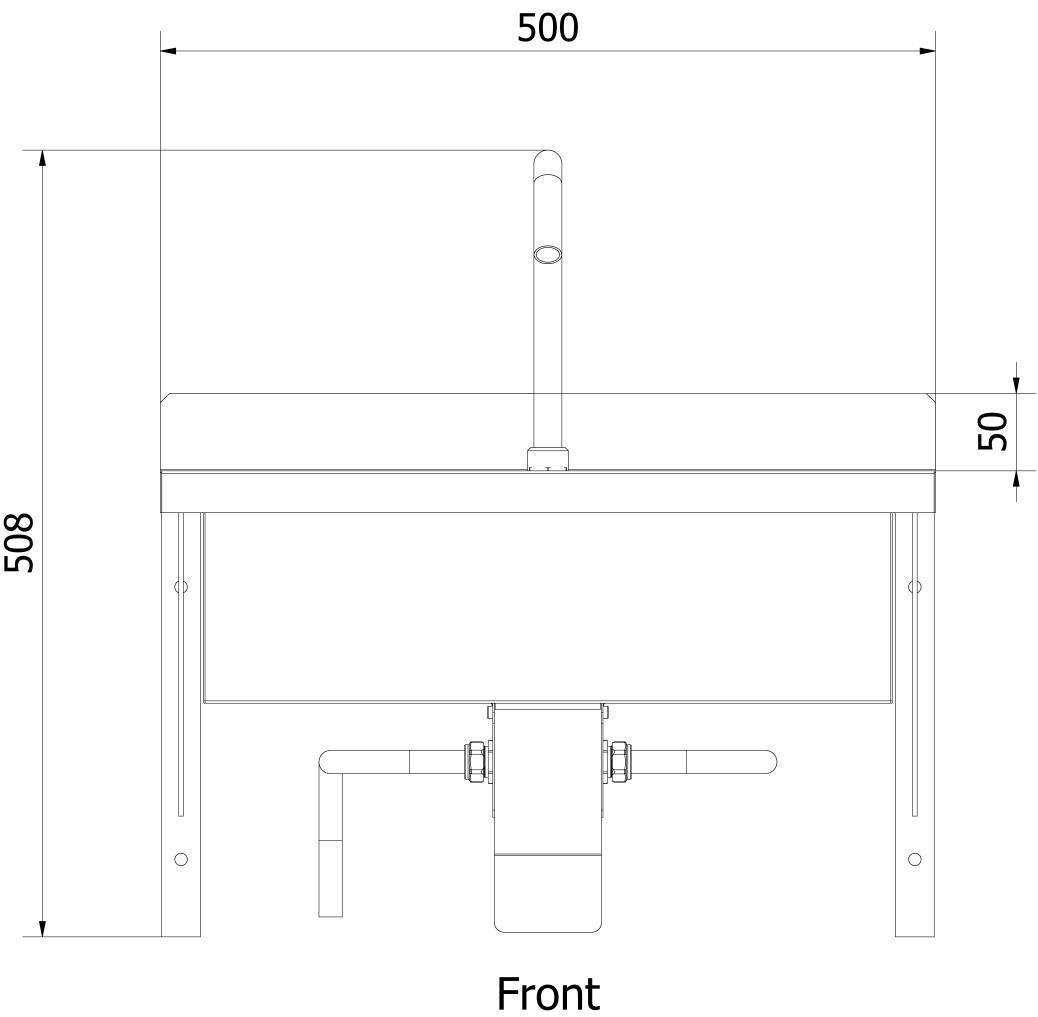


PRODUCT IMAGE · B36658(D) front view: demand model with 50mm standard splashback. Dimensions in mm. Model-specific reference; other configurations are not shown.

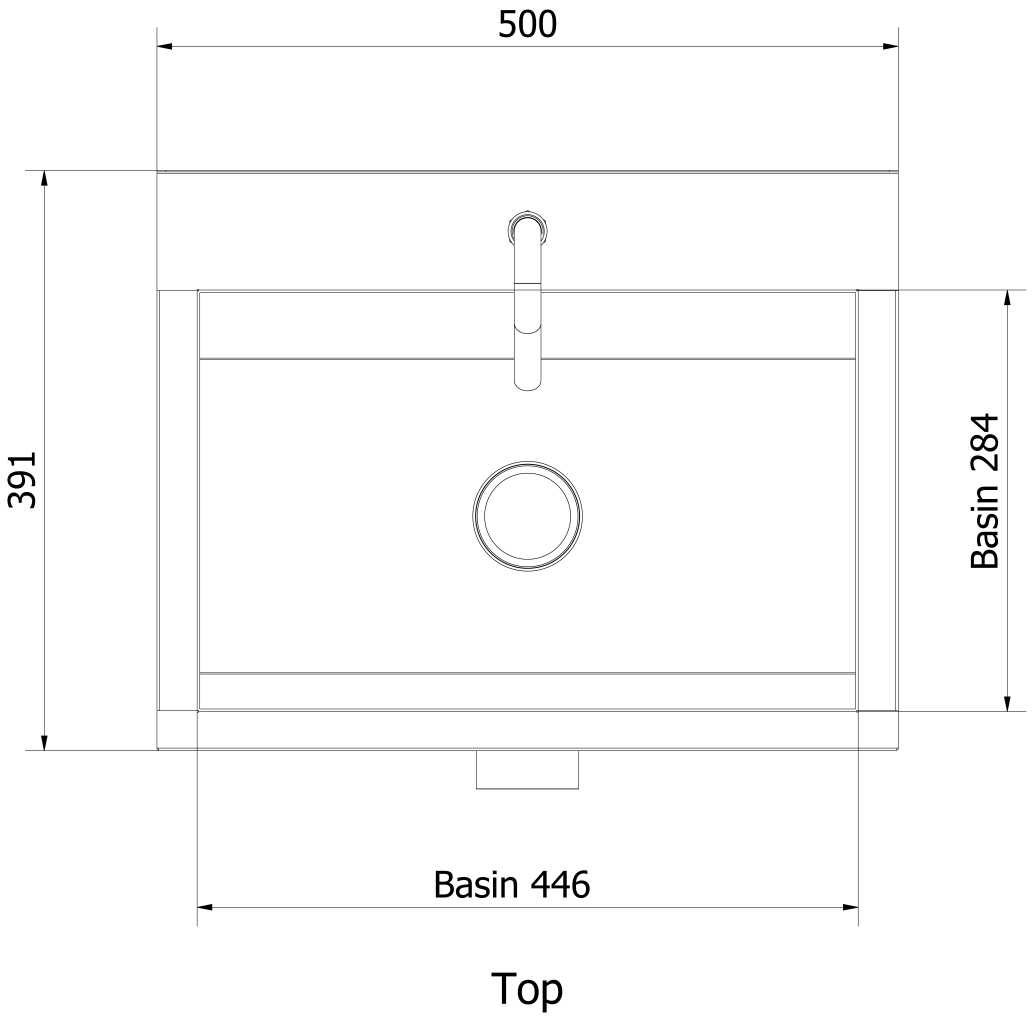

PRODUCT IMAGE · B36658(D) top view: demand model with 50mm standard splashback. Dimensions in mm. Model-specific reference; other configurations are not shown.

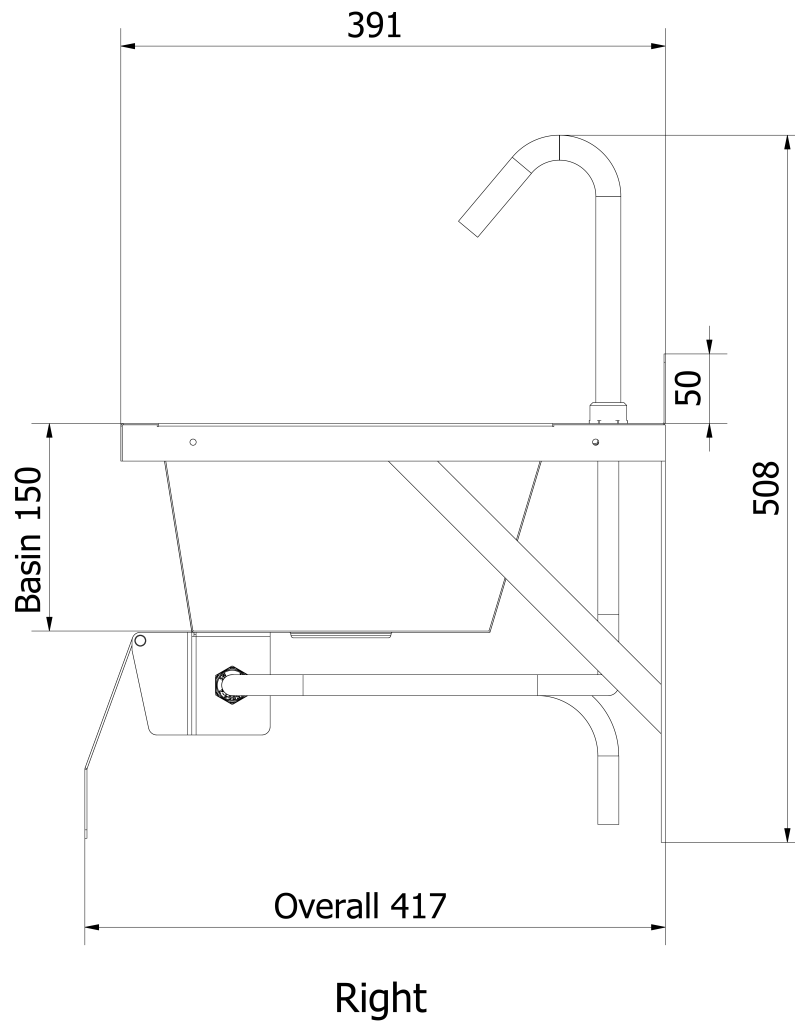


PRODUCT IMAGE · B36658(D) right view: demand model with 50mm standard splashback. Dimensions in mm. Model-specific reference; other configurations are not shown.

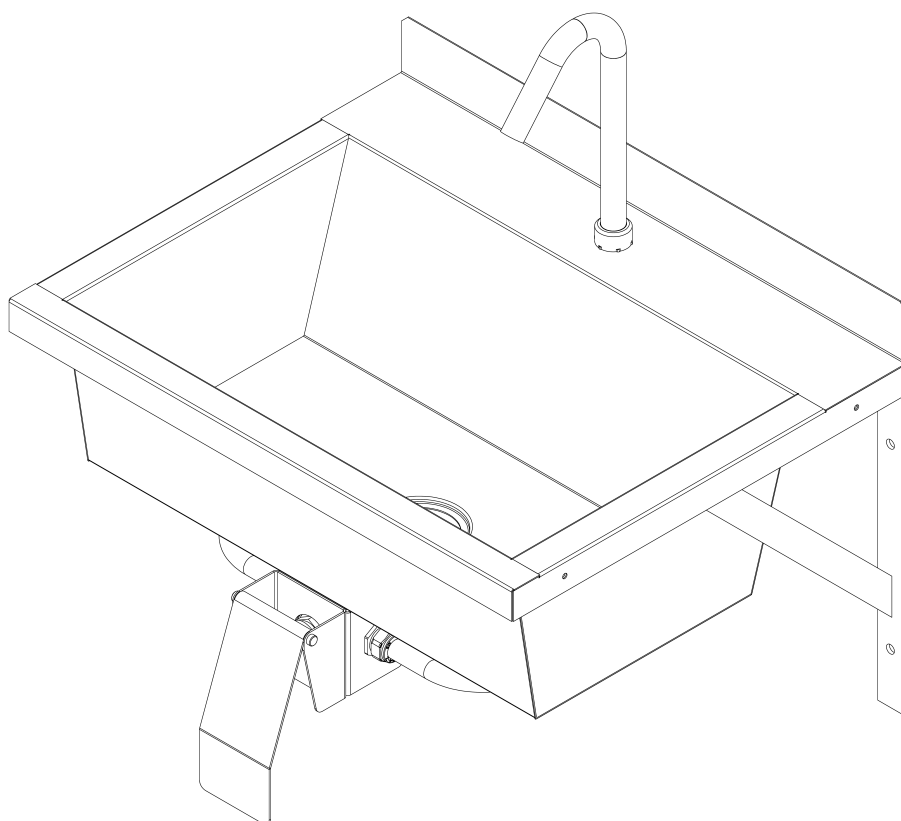


Top Right


PRODUCT IMAGE · B36658(D) isometric view: demand model with 50mm standard splashback. Dimensions in mm. Model-specific reference; other configurations are not shown.

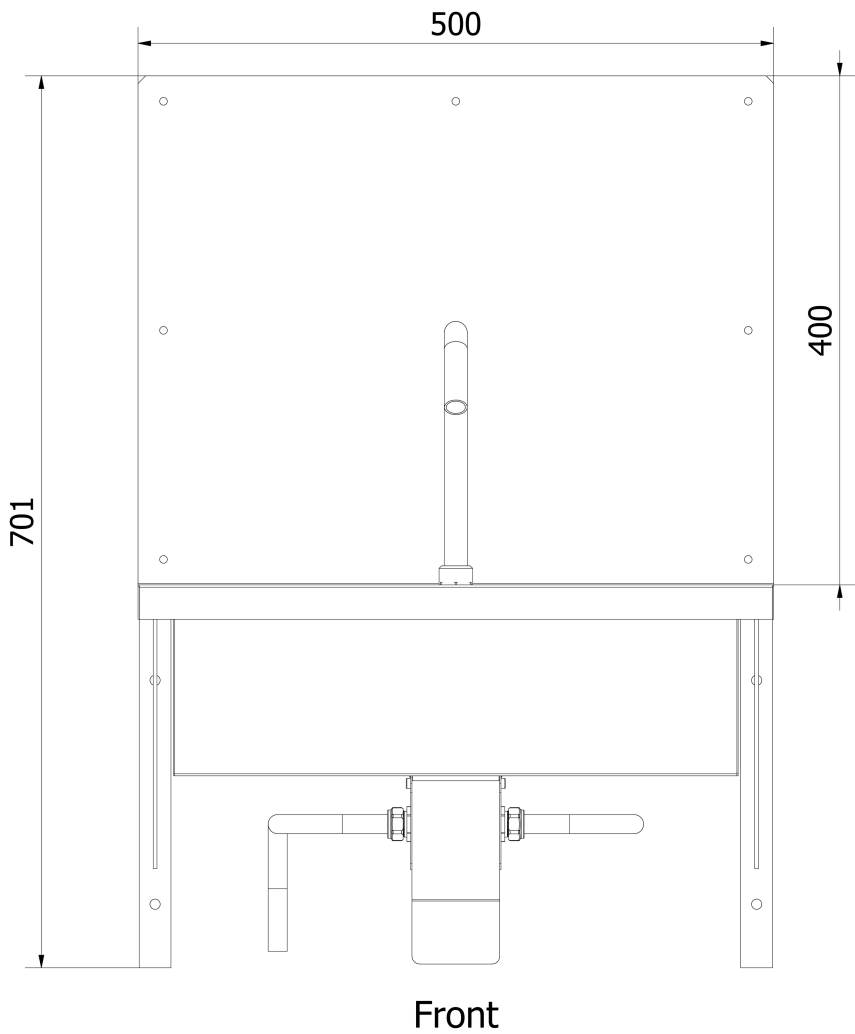


PRODUCT IMAGE · B36658(DE) front view: demand model with 400mm extended splashback. Dimensions in mm. Model-specific reference; other configurations are not shown.

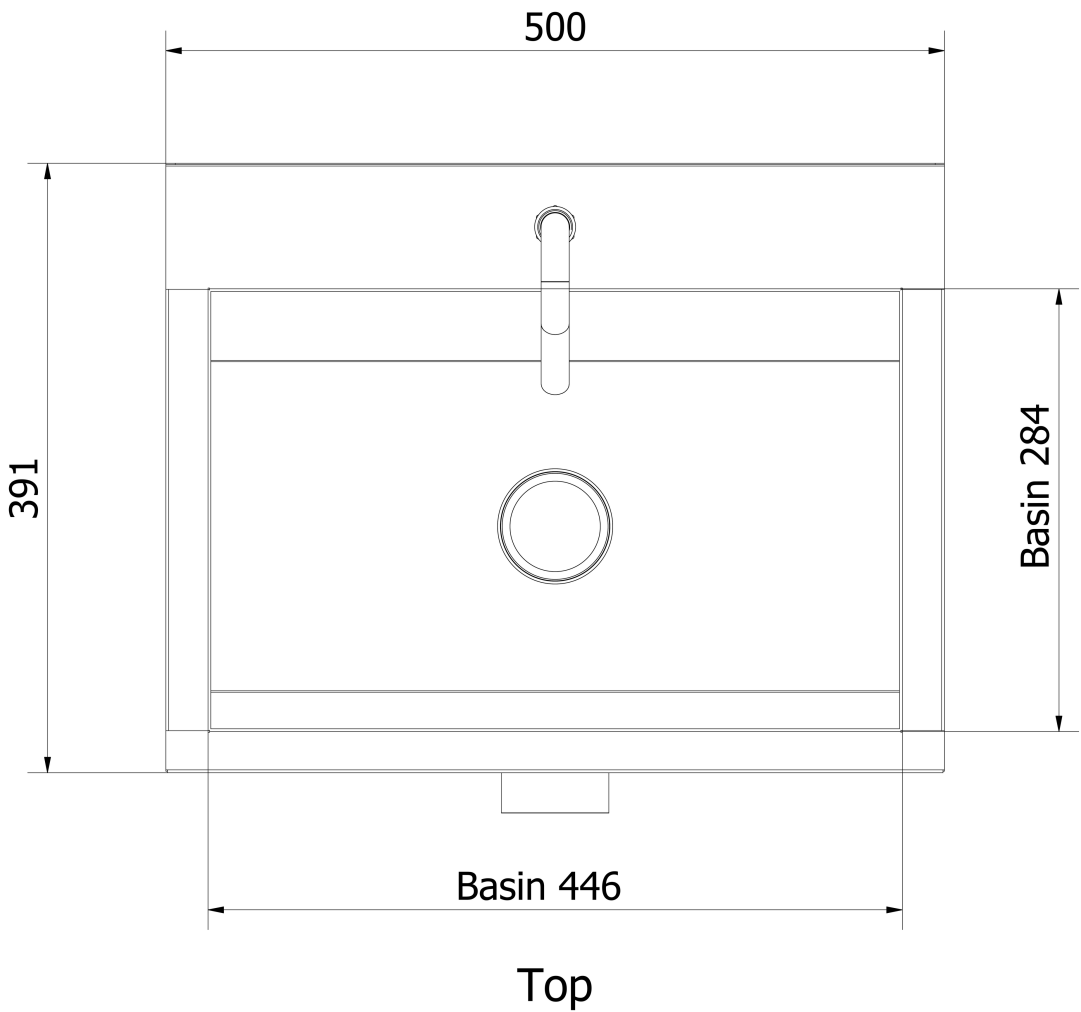

PRODUCT IMAGE · B36658(DE) top view: demand model with 400mm extended splashback. Dimensions in mm. Model-specific reference; other configurations are not shown.

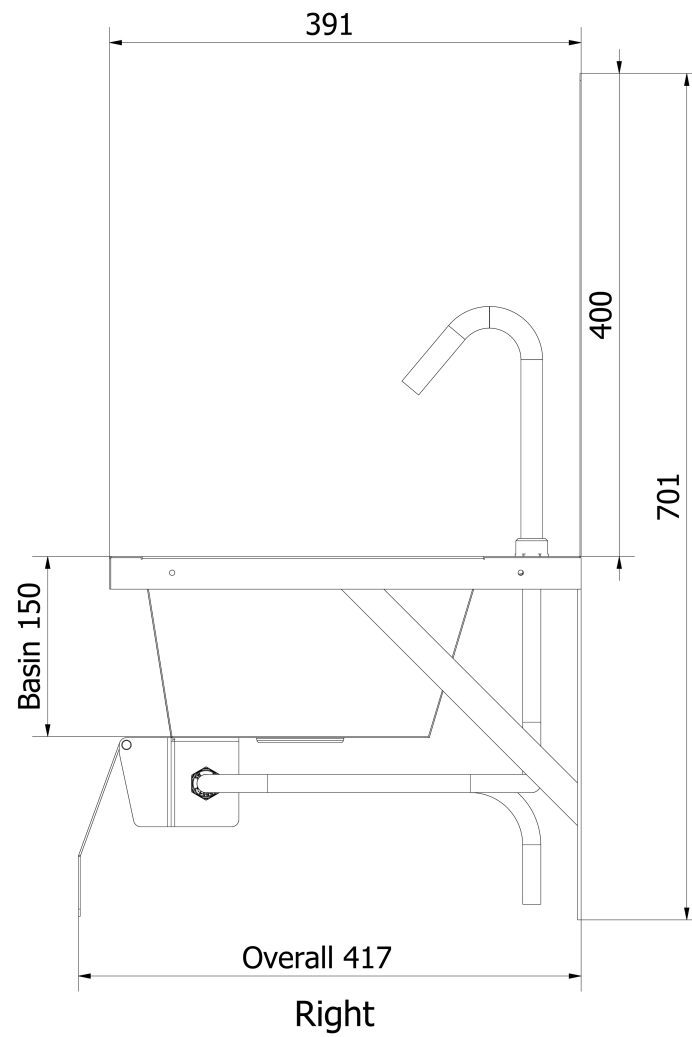

PRODUCT IMAGE · B36658(DE) right view: demand model with 400mm extended splashback. Dimensions in mm. Model-specific reference; other configurations are not shown.

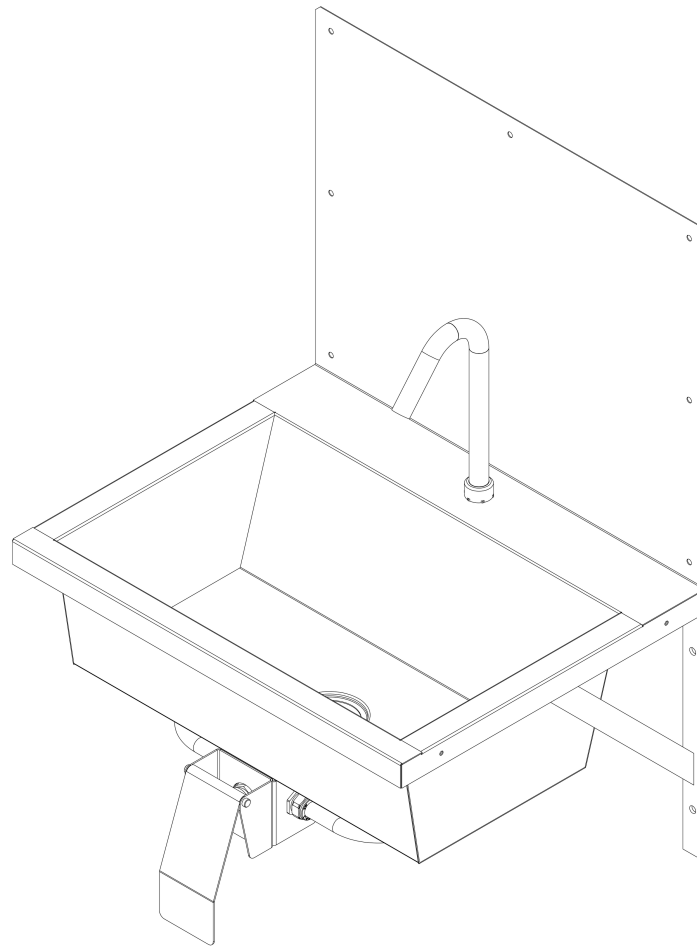

Top Right

PRODUCT IMAGE · B36658(DE) isometric view: demand model with 400mm extended splashback. Model-specific reference; other configurations are not shown.

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.