

PRODUCT RANGE SPECIFICATION

B36661(S) – Wash Hand Basin with Radiused Corners

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B36661(S){PSS}	DATA STATUS Published catalogue data	GENERATED ON 18 Sep 2026
---------------------------------	--------------------------------------	---	-----------------------------

01 Product description and specification

Product description	The Basterfield B36661(S) wash hand basin is designed for medical and healthcare handwashing areas, with 25 mm radiused internal bowl corners that make the corner junctions easier to reach during routine cleaning. Its stainless steel construction and support options also suit general handwashing in laboratories, food-processing facilities, catering areas and institutional buildings. Both models are manufactured from 1.2 mm Grade 304 stainless steel. The catalogue basin dimensions are 500 mm long x 420 mm wide x 400 mm high, with a bowl measuring 440 mm long x 310 mm wide x 150 mm deep. The basin includes a 50 mm high integrated splashback, a 26 mm turndown edge and a 40 mm waste outlet hole. Stainless steel gallows brackets are made from 25 x 25 mm square tube, with pre-drilled mounting holes at a 215 mm pitch. Choose B36661(S-G1) for the bracket-mounted model or B36661(S-G1-SL) for the model with additional stainless steel front support legs and adjustable feet. Specify the tapware, tap-hole arrangement, waste fittings, mounting height and fixing requirements to suit the installation. The support-leg model uses the same basin; its final installed height is set as part of the installation.
---------------------	--

Short Form Specification

SPECIFICATION USE Use this description when specifying this product range. Basterfield B36661(S) wash hand basin with 25 mm radiused bowl corners; Grade 304 stainless steel, 1.2 mm thick; catalogue basin dimensions 500 x 420 x 400 mm (L x W x H); bowl 440 x 310 x 150 mm (L x W x D); integrated 50 mm splashback; 26 mm turndown edge; 40 mm waste outlet hole. Stainless steel gallows brackets in 25 x 25 mm square tube, mounting-hole pitch 215 mm. B36661(S-G1): no front support legs. B36661(S-G1-SL): front support legs with adjustable feet. Tapware, waste fittings and installation height to be specified.
--

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Mounting Type	Stainless Steel Gallows Brackets	—	—
Material	Stainless Steel Grade 304	—	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Waste Outlet Diameter	40	mm	—

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material Thickness	1.2	mm	The thickness of the material used for the item's primary construction. The thickness of individual components may vary.
Splashback Height	50	mm	Height of the splashback above the tabletop or working surface.
Bowl Length	440	mm	The length of the bowl typically as measured from left to right.
Bowl Width	310	mm	—
Bowl Depth	150	mm	—

03 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B36661(S-G1)	Wash Hand Basin, Grade 304 Stainless Steel 1.2mm, 500 x 420 x 400mm, Bowl 440 x 310 x 150mm with 25mm Radiused Corners, 50mm Splashback, 40mm Waste Outlet Hole; Stainless Steel Gallows Brackets, No Front Support Legs	Front Support Legs: No
B36661(S-G1-SL)	Wash Hand Basin, Grade 304 Stainless Steel 1.2mm, 500 x 420 x 400mm, Bowl 440 x 310 x 150mm with 25mm Radiused Corners, 50mm Splashback, 40mm Waste Outlet Hole; Stainless Steel Gallows Brackets and Front Support Legs with Adjustable Feet	Front Support Legs: Yes

04 Functional features

01	25 mm radiused bowl corners Curved internal corners provide access for routine cleaning in medical, healthcare and other handwashing areas.
02	Grade 304 stainless steel, 1.2 mm thick Both models use the same stainless steel material grade and thickness.
03	440 x 310 x 150 mm bowl A defined bowl size and 40 mm waste outlet hole support tapware and drainage planning.
04	50 mm integrated splashback The rear splashback helps protect the adjacent wall from splashes. The basin also has a 26 mm turndown edge.
05	Tubular stainless steel gallows brackets 25 x 25 mm square tubular brackets have pre-drilled mounting holes at a 215 mm pitch.
06	Optional front support legs Select S-G1-SL for additional front support legs with adjustable feet, or S-G1 for the bracket-mounted basin.

05 Application information

Intended applications	Commercial Wash Troughs & Basins, General Handwashing, Hospital Sinks, Laboratory Work Areas
-----------------------	--

Industries	Aged Care & Nursing Homes, Clinical Laboratories, Food & Beverage Processing, Government & Public Sector, Healthcare, Hospitality & Foodservice, Hospitals & Clinics, Institutional & Contract Catering, Research Laboratories
------------	--


06 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images




PRODUCT IMAGE

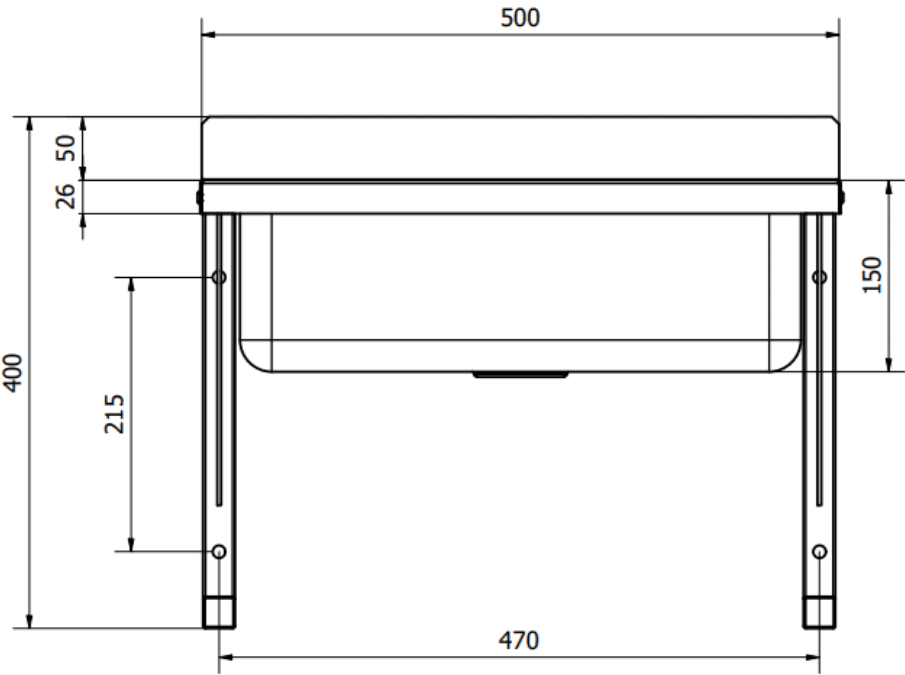


FRONT

PRODUCT IMAGE

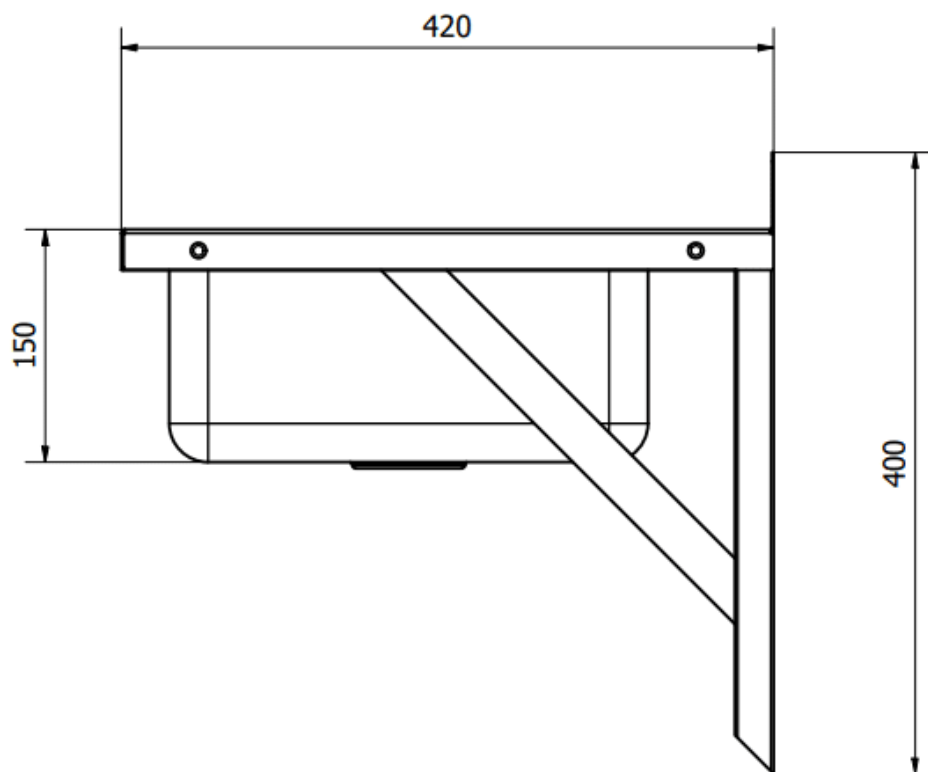


RIGHT

PRODUCT IMAGE

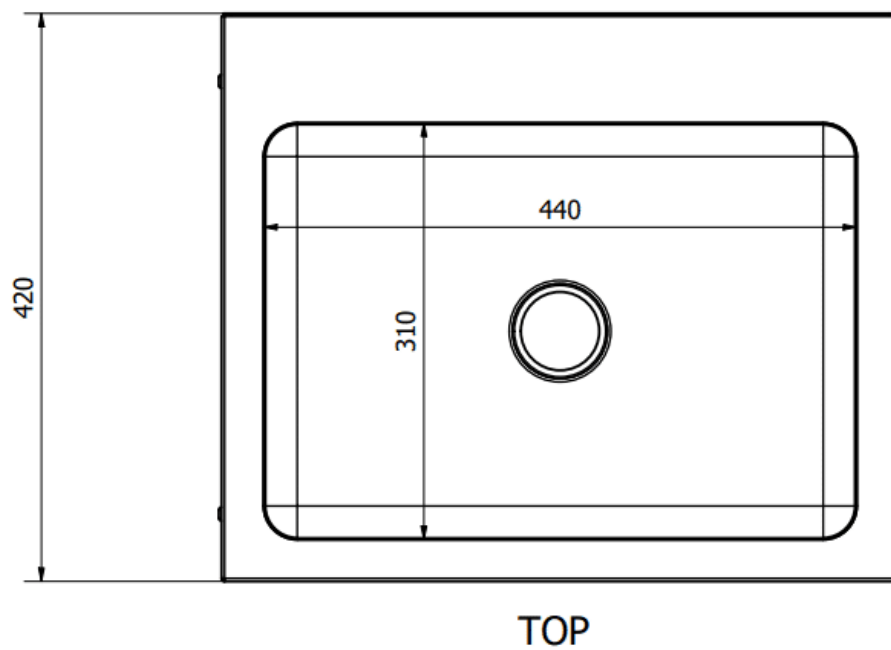

PRODUCT IMAGE

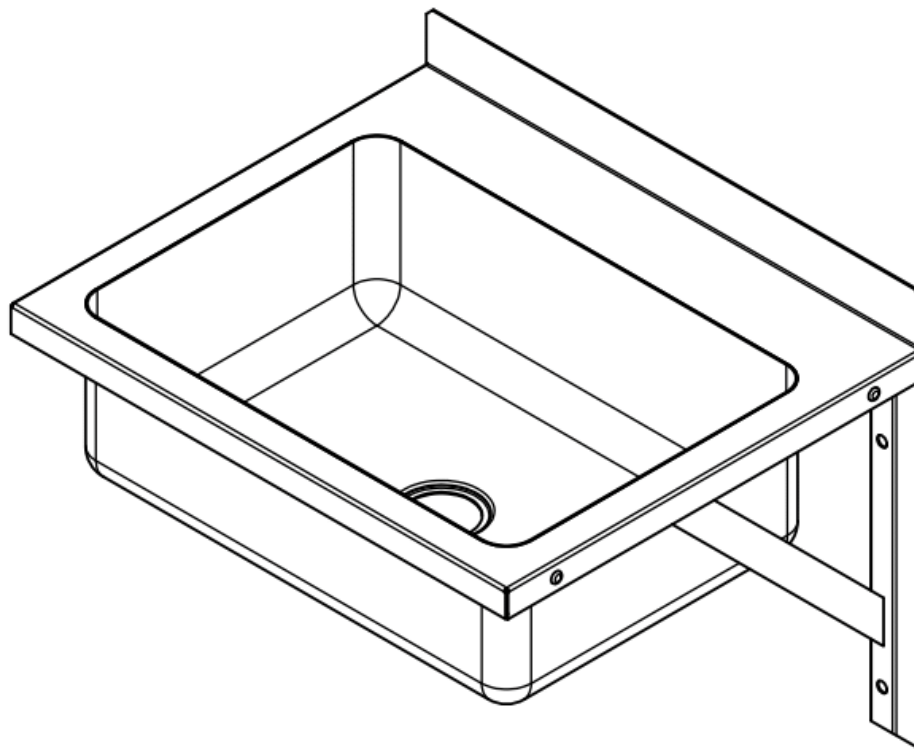

TOP RIGHT

PRODUCT IMAGE



PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.