MODEL SPECIFICATION

# B37356(112-1600x0750) – Scullery Wash Trough 304 (1600mm (L) x 750mm (W))



**PRODUCT IMAGE** · Scullery wash trough with sloping front face, cross-braced stainless steel tubular framework and adjustable feet.

| DOCUMENT SCOPE | DOCUMENT REFERENCE | DATA STATUS | GENERATED ON |
|---|---|---|---|
| **Model** | **B37356(112-1600x0750) {PSS}** | **Published catalogue data** | **1 Nov 2026** |

## 01 Model specification

Scullery Wash Trough Stainless Steel Grade 304, 1.2mm Thick, 1600mm (L) x 750mm (W) x 1050mm (H), with 900mm Working Height, 400mm Bowl Depth, Sloping Front Face, 150mm Rear Splashback, 40mm x 40mm Grade 304 Stainless Steel Tubular Framework with Cross Bracing, Stainless Steel Adjustable Feet, 25mm Radiused Corners and Ø90mm Waste Outlet

## 02 Technical specifications

| PARAMETER | VALUE | UNIT | TECHNICAL NOTE |
|---|---|---|---|
| **Working Height** | 900 | mm | 900mm to the working rim, excluding the 150mm rear splashback. |
| **Splashback Height** | 150 | mm | 150mm rear splashback above the 900mm working rim, giving a 1050mm overall height. |
| **Overall height** | 1050 | mm | Overall height of 1050mm, including the 150mm rear splashback. |
| **Number of Bowls** | 1 | – | – |
| **Length** | 1600 | mm | Overall outside length of the trough: 1600mm or 1700mm. |
| **Material** | Stainless Steel Grade 304 | – | The trough body is manufactured from Grade 304 stainless steel. |
| **Material Thickness** | 1.2 | mm | 1.2mm thickness of the Grade 304 stainless steel trough body. |

## 02 Technical specifications

| PARAMETER | VALUE | UNIT | TECHNICAL NOTE |
|---|---|---|---|
| **Width** | 750 | mm | Overall outside width. Standard width is 650mm; 700mm and 750mm are wider variants. Confirm usable internal clearances for the articles being washed. |
| **Bowl Depth** | 400 | mm | 400mm bowl depth across all length and width variants. |
| **Adjustable Feet** | Yes | – | – |
| **Bowl Corner Radius** | 25 | mm | 25mm radiused bowl corners make the internal corners easier to reach and clean. |
| **Cross Bracing** | Yes | – | Cross bracing supports the stainless steel tubular framework of the wash trough. |
| **Mounting Type** | Stainless Steel Tubular Stand | – | – |
| **Waste Outlet Diameter** | 90 | mm | Standard Ø90mm waste outlet. Coordinate the waste fitting and downstream drainage connection for the installation. |
| **Framework Material** | Stainless Steel Grade 304 | – | The tubular framework is manufactured from Grade 304 stainless steel. |
| **Framework Profile** | 40 × 40mm Square Tubular Framework | – | 40mm x 40mm square stainless steel tubular framework, with cross bracing to support the wash trough. |
| **Feet Material** | Stainless Steel | – | Stainless steel adjustable feet allow levelling during installation. |
| **Face Style** | Sloping Front Face | – | Sloping front face of the scullery wash trough. |
| **Splashback Configuration** | Rear Splashback | – | – |

## 03 Dimensions and mass

| PARAMETER | VALUE | UNIT |
|---|---|---|
| **Length** | 1600 | mm |
| **Width** | 750 | mm |
| **Overall height** | 1050 | mm |

## 04 Model and supply data

| | |
|---|---|
| **Parent product** | B37356 — Scullery Wash Trough |
| **Typical lead time** | 10–15 working days |
| **Warranty** | 24 months |

## 05 Specification notes

**Configuration description**

The Basterfield B37356(112-1600x0750) is a 1600mm long × 750mm wide scullery wash trough for manual soaking and rinsing of crates, trays, utensils and removable equipment in food production and commercial wash-up areas. The bowl is 400mm deep, with a sloping front face and 25mm radiused corners for easier cleaning.

The trough body is manufactured from 1.2mm Grade 304 stainless steel. A 40 × 40mm Grade 304 stainless steel tubular framework with cross bracing supports the trough, and stainless steel adjustable feet allow levelling during installation.

Working height is 900mm. The 150mm rear splashback brings the overall height to 1050mm and helps contain splashes behind the wash area. A Ø90mm waste outlet is standard. Check usable internal clearances for the articles being washed and coordinate the tapware, waste closure for soaking and drainage connections with the installation requirements.

**Short Form Specification**

**SPECIFICATION USE**
Use this description when specifying this model.

Basterfield B37356(112-1600x0750) Scullery Wash Trough, 1600mm (L) × 750mm (W) × 1050mm overall height, with 900mm working height and 150mm rear splashback. 1.2mm Grade 304 stainless steel body with 400mm bowl depth, sloping front face and 25mm radiused corners. 40 × 40mm Grade 304 stainless steel tubular framework with cross bracing, stainless steel adjustable feet and standard Ø90mm waste outlet.

**Detailed specification**

- Model: B37356(112-1600x0750)
- Overall dimensions: 1600mm (L) × 750mm (W) × 1050mm (H)
- Working height: 900mm, excluding splashback
- Rear splashback height: 150mm
- Bowl depth: 400mm
- Body material: Stainless Steel Grade 304
- Body material thickness: 1.2mm
- Bowl corners: 25mm radius
- Front face: Sloping
- Framework: 40 × 40mm Grade 304 stainless steel square tube
- Cross bracing: Included
- Feet: Stainless steel, adjustable
- Waste outlet: Ø90mm, standard
- Use: Manual soaking and rinsing of crates, trays, utensils and removable equipment

## 06 Frequently asked questions

**What is the scullery wash trough used for?**

Manual soaking and rinsing of crates, trays, utensils and removable equipment in food production facilities, commercial sculleries and catering wash-up areas.

**Which lengths and widths are available?**

Choose 1600mm or 1700mm length, each available in 650mm, 700mm or 750mm width. The standard width is 650mm; 700mm and 750mm are wider variants.

**How deep is the bowl?**

The bowl depth is 400mm across all six variants. Overall length and width describe the outside dimensions; confirm the usable internal dimensions for your crates and equipment.

**Does the 900mm height include the splashback?**

No. The working height is 900mm. The 150mm rear splashback brings the overall height to 1050mm.

**What materials are used?**

The body is 1.2mm Grade 304 stainless steel. The 40 × 40mm tubular framework is also Grade 304 stainless steel and includes cross bracing. The adjustable feet are stainless steel.


**What supports routine cleaning?**

The bowl has 25mm radiused corners for easier access during cleaning, together with a stainless steel body and a rear splashback to help contain splashes.


**What waste outlet is provided?**

A Ø90mm waste outlet is standard. Confirm the required waste fitting, closure for soaking and downstream drainage connection when specifying the installation.


## Product drawings and images

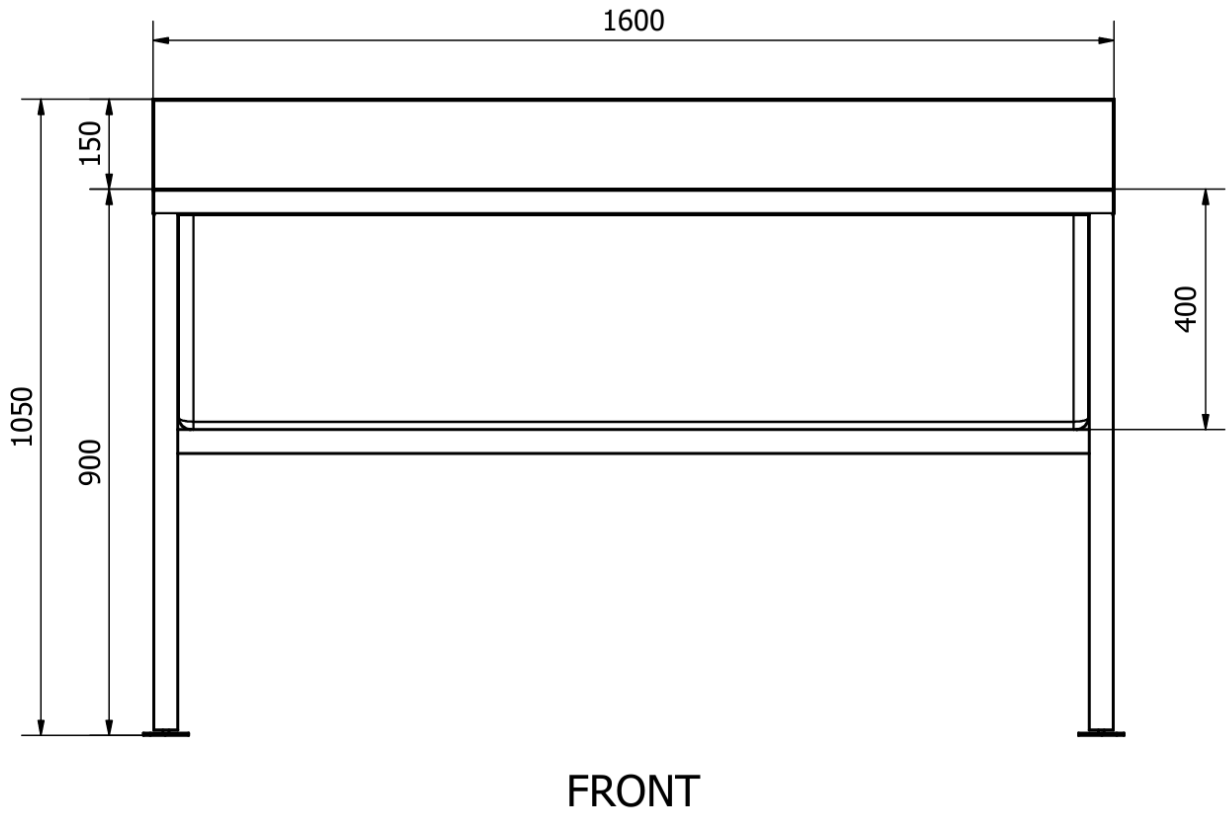



**FRONT VIEW** · 1600mm length, 400mm bowl depth and 900mm working height; overall height 1050mm including the 150mm rear splashback. Dimensions in millimetres.

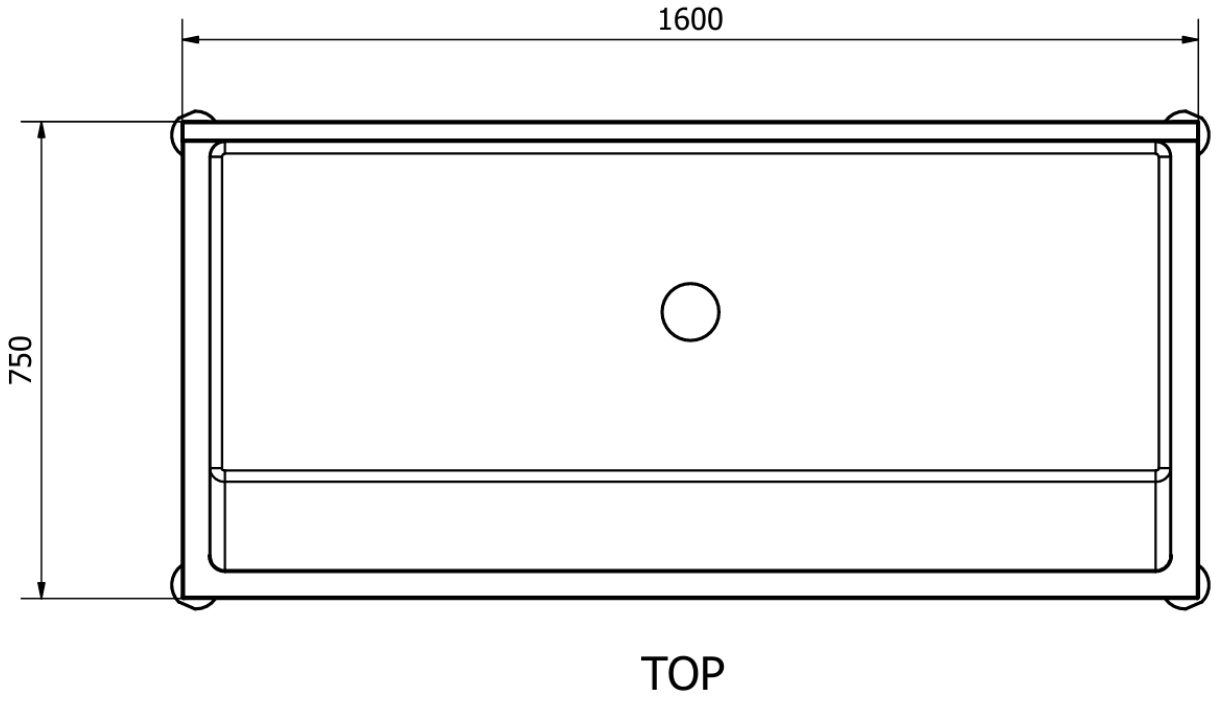


**TOP VIEW** · 1600mm overall length and 750mm overall width. Dimensions in millimetres.

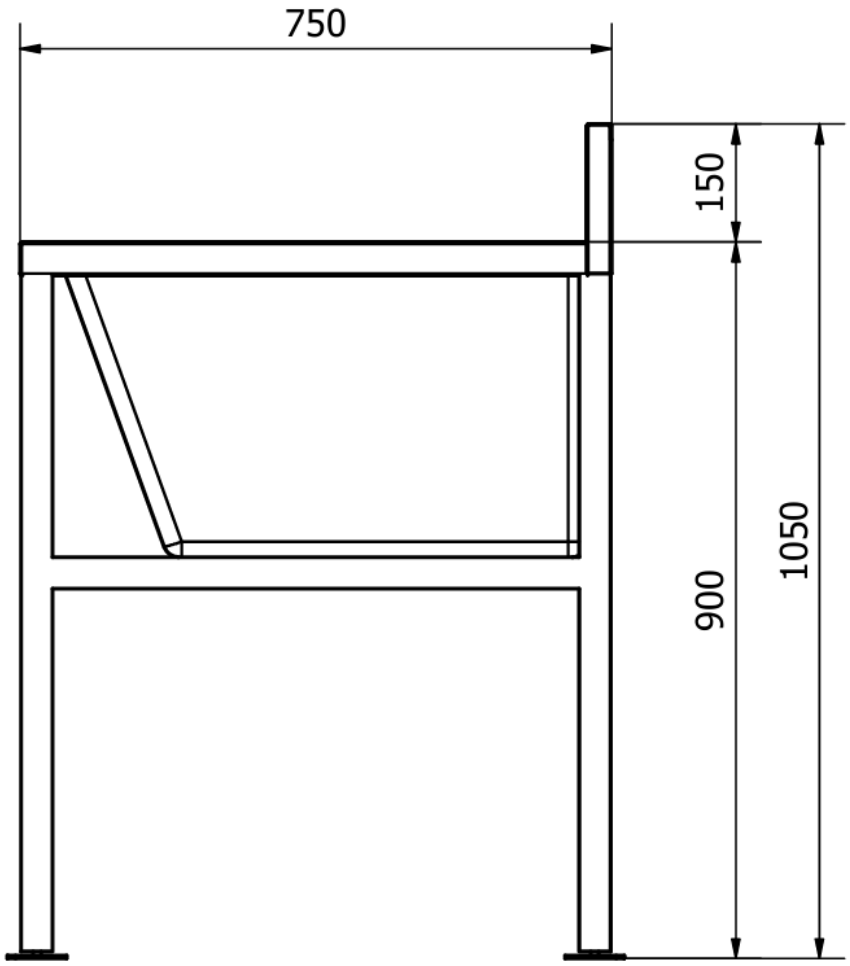


**RIGHT VIEW** · 750mm overall width, 900mm working height and 150mm rear splashback; overall height 1050mm. Dimensions in millimetres.

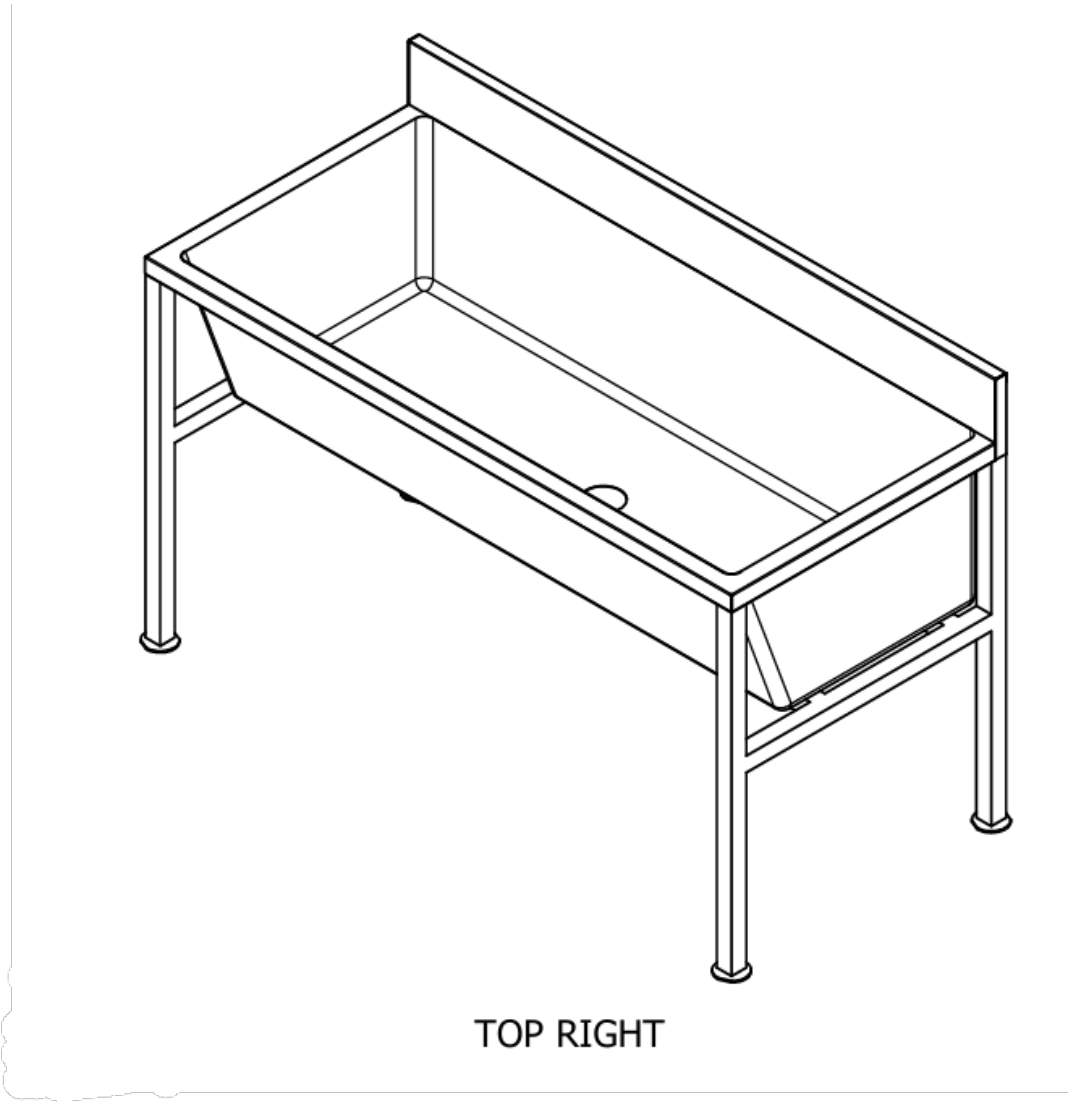


**ISOMETRIC VIEW** · Isometric drawing of the 1600mm x 750mm scullery wash trough with sloping front face and cross-braced tubular framework.

**VERIFICATION REQUIRED** Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.