PRODUCT RANGE SPECIFICATION

B38135 – Wall-Mounted Stainless Steel Boot Rack with Square Prongs



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B38135{PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b38135-wall-mounted-stainless-steel-boot-rack-with-square-prongs#specifications

01 Product description and specification

Product description

Wall mounted Grade 304 stainless steel boot rack with individual square tubular prongs and integral mounting brackets. Choose storage for 8, 12, 16, 20, 24 or 36 boot pairs, with a common 396 mm width and model-specific lengths and heights. The open rack organises wellington and work boots in changing rooms and footwear storage areas across food processing, agriculture, laundries and industry. Select the capacity and wall space for your site, and confirm suitable wall support and fixings.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B38135 wall mounted boot rack, Grade 304 stainless steel, with individual square tubular boot-support prongs and integral mounting brackets. Select the 8-, 12-, 16-, 20-, 24- or 36-pair model. Overall width 396 mm; length and height as scheduled for the selected model. Provide suitable wall support, fixings and access clearances for the installation.

02 Configuration options

Boot Pairs	8; 12; 16; 20; 24; 36

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 **Six boot-pair capacities**
Select storage for 8, 12, 16, 20, 24 or 36 pairs of boots.

02 **Grade 304 stainless steel**
The rack is manufactured from Grade 304 stainless steel.

03 **Individual square tubular prongs**
Separate square tubular prongs provide a defined storage position for each boot.

04 **Integral mounting brackets**
Integral brackets provide the wall mounting arrangement. Select suitable fixings for the supporting wall.

05 396 mm width across the range

All six specified models are 396 mm wide; lengths and heights vary by model.

06 Organised wall storage

Position the rack to keep work boots organised with suitable access and cleaning clearance around the installation.

04 Application information

Intended applications	Change Rooms & Locker Rooms, Footwear Storage & Drying, PPE Storage & Dispensing
Industries	Commercial Laundries, Construction, Dairy & Beverage Processing, Farms & Orchards, Fish & Seafood Processing, Food & Beverage Processing, Fresh Produce & Packhouses, General Manufacturing, Hospitals & Clinics, Institutional & Contract Catering, Meat & Poultry Processing, Mining & Quarrying, Pharmaceutical Manufacturing, Research Laboratories, Veterinary Services

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

How many pairs of boots can the rack accommodate?

The range offers 8, 12, 16, 20, 24 and 36 boot pairs. A pair means two boots; choose the required model by its stated pair capacity.

How are the boots stored on the rack?

Each pair of boots is stored inverted on individual stainless steel tubular boot pegs. This keeps the boots separated, allows them to drain and air more freely, and keeps footwear off floors and other surfaces.

What are the model dimensions?

All models are 396 mm wide. P08 and P12: 1050 mm long x 924 mm high. P16: 1050 x 1134 mm. P20: 1310 x 1134 mm. P24: 1050 x 1590 mm. P36: 1570 x 1590 mm. Length is listed before height in each case.

Why do the 8- and 12-pair options have the same overall dimensions?

The supplied specification lists both B38135(P08) and B38135(P12) at 1050 x 396 x 924 mm overall, with capacities of 8 and 12 boot pairs respectively. Select by the stated capacity as well as the available installation space.

What is the rack made from?

The B38135 range is specified in Grade 304 stainless steel with individual square tubular boot-support prongs and integral wall mounting brackets.

How is the rack installed?

Fix it to a suitable load-bearing wall or support structure. Confirm fixings for the substrate and loaded rack, and allow space to place and remove boots and clean around the installation.

Does the stated height include the mounting height above the floor?

No. The listed height is the overall height of the rack itself. Set its position above the floor to suit access, the boots being stored and site cleaning requirements.

Where can this boot rack be used?

Use it in changing rooms, locker rooms and footwear storage areas in food processing, agriculture, laundries, manufacturing, mining and construction, or in healthcare, laboratory, pharmaceutical, veterinary and catering areas where work boots are worn.


What does the rack provide for drying?

The open prong layout allows air circulation around stored boots. No powered drying equipment or drying-time performance is specified for this rack.


How should it be maintained?

Clean the rack with products and methods suitable for Grade 304 stainless steel and follow the workplace cleaning procedure. Inspect the prongs, brackets and wall fixings regularly.


Product drawings and images

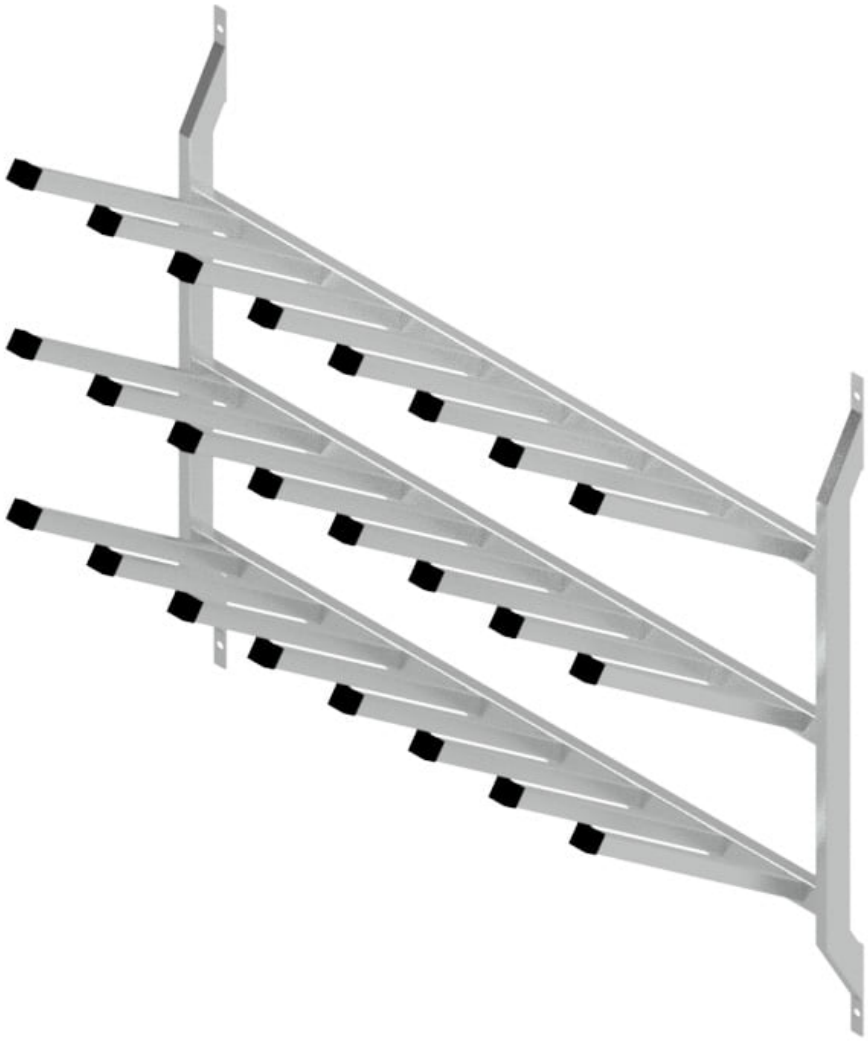


PRODUCT IMAGE

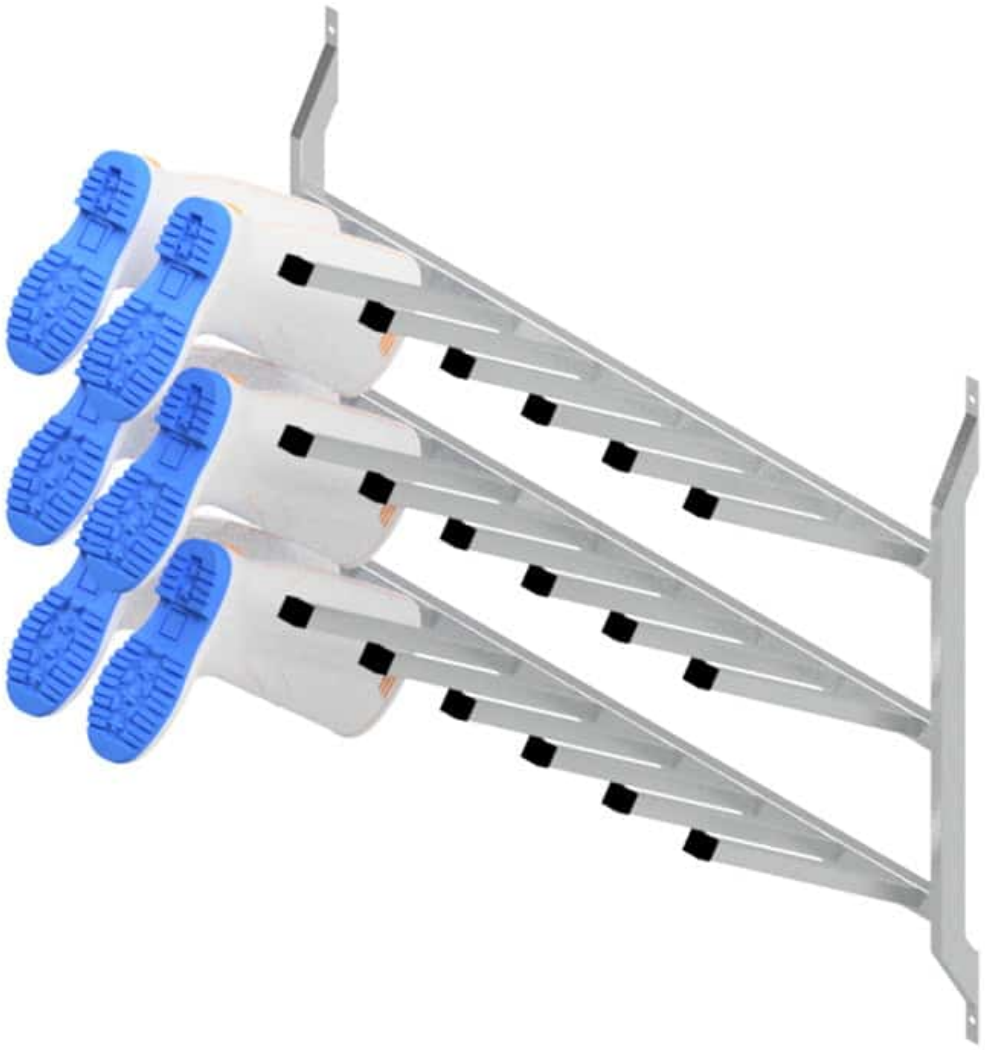


PRODUCT IMAGE

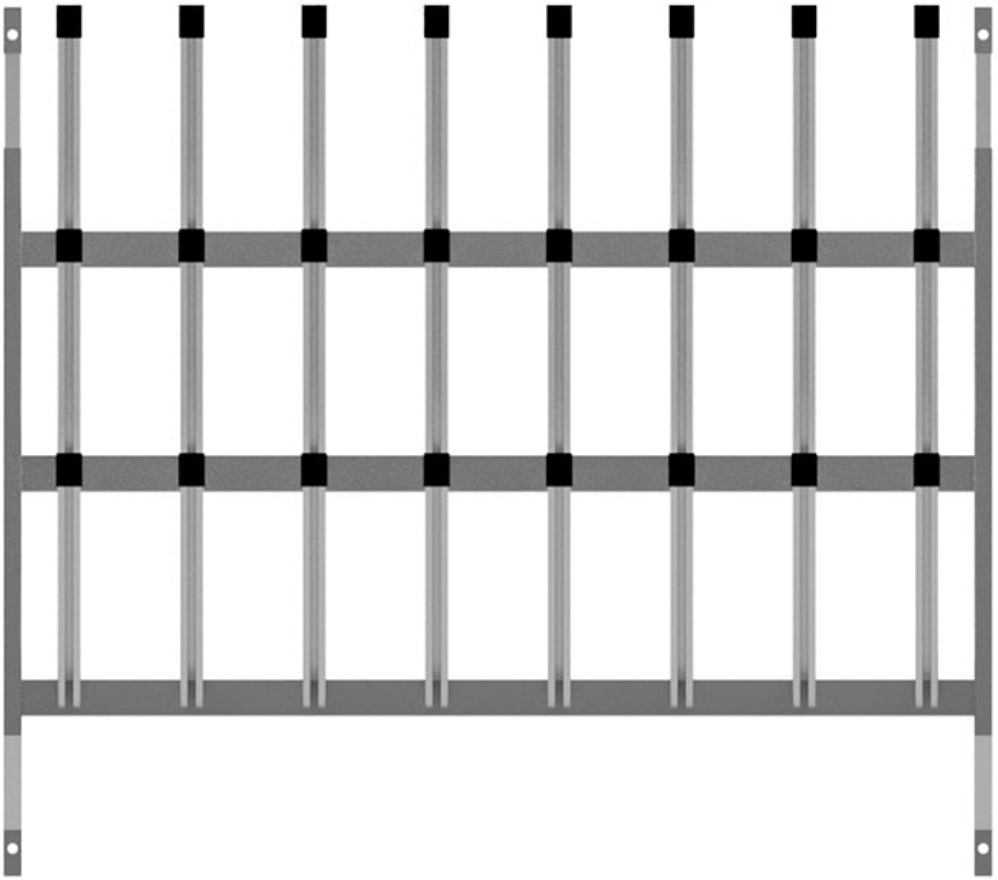

PRODUCT IMAGE

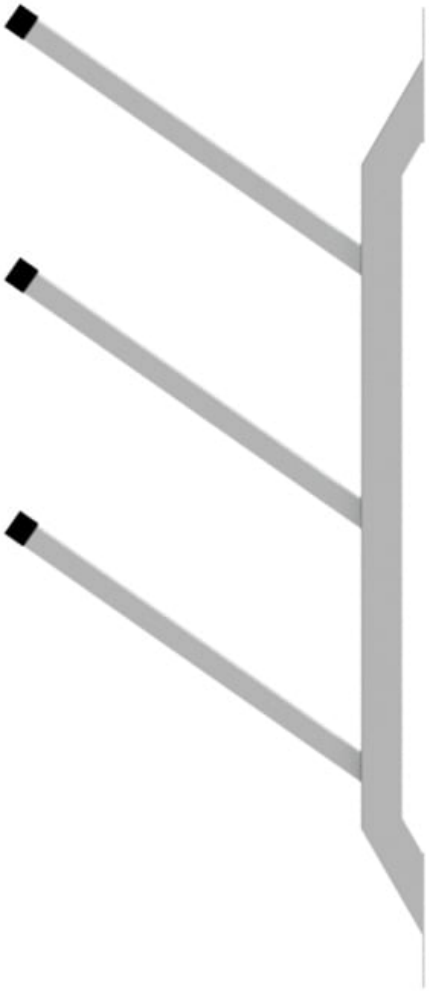

PRODUCT IMAGE

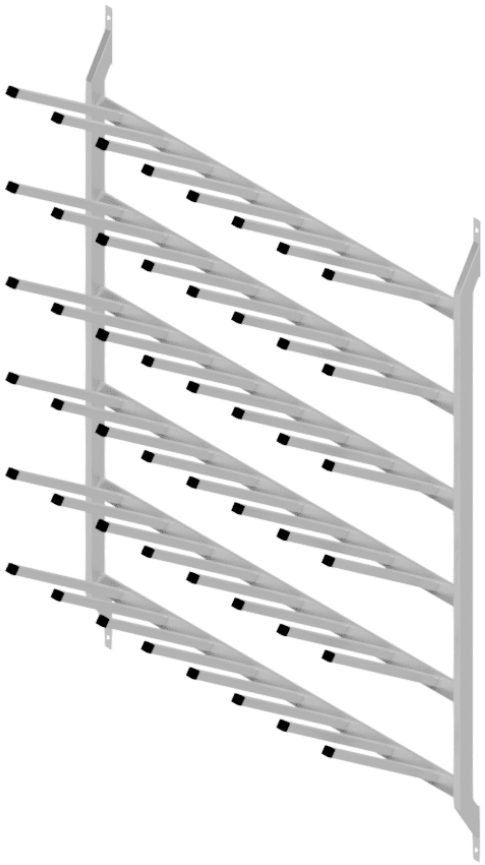

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.