

PRODUCT RANGE SPECIFICATION

B38135 – Wall-Mounted Stainless Steel Boot Rack with Square Prongs



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B38135{PSS}	DATA STATUS Published catalogue data	GENERATED ON 4 Oct 2026
---------------------------------	-----------------------------------	---	----------------------------

01 Product description and specification

Product description

The Basterfield B38135 is a wall mounted boot rack manufactured from Grade 304 stainless steel. Individual square tubular prongs support each boot, while integral brackets provide the wall mounting arrangement. The open layout keeps wellington and work boots organised at a dedicated storage point.

Choose from capacities of 8, 12, 16, 20, 24 or 36 boot pairs. Each model is 396 mm wide. Length and height vary with the selected model, so check both the required number of pairs and the available wall space. The 8- and 12-pair models have the same supplied overall dimensions; their stated storage capacities remain different.

B38135(P08): 8 boot pairs; 1050 mm length x 396 mm width x 924 mm height.

B38135(P12): 12 boot pairs; 1050 mm length x 396 mm width x 924 mm height.

B38135(P16): 16 boot pairs; 1050 mm length x 396 mm width x 1134 mm height.

B38135(P20): 20 boot pairs; 1310 mm length x 396 mm width x 1134 mm height.

B38135(P24): 24 boot pairs; 1050 mm length x 396 mm width x 1590 mm height.

B38135(P36): 36 boot pairs; 1570 mm length x 396 mm width x 1590 mm height.

Applications include changing rooms, locker rooms, footwear storage areas and PPE storage points. Typical settings include food-processing and packing premises, farms, commercial laundries, manufacturing workplaces, mines and construction sites. It can also provide boot storage in healthcare, laboratory, pharmaceutical, veterinary and catering support areas where work boots are used.

Mount the rack to a suitable load-bearing wall or support structure using fixings selected for the substrate and loaded rack. Set the installation height to suit access, boot clearance and cleaning around the rack. Overall product height is separate from mounting height above the floor.

The prong arrangement leaves space around stored footwear for air circulation. Clean the rack using products and methods suitable for Grade 304 stainless steel and the workplace cleaning procedure. Inspect the rack and mounting fixings as part of routine maintenance.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B38135 wall mounted boot rack, Grade 304 stainless steel, with individual square tubular boot-support prongs and integral mounting brackets. Select the 8-, 12-, 16-, 20-, 24- or 36-pair model. Overall width 396 mm; length and height as scheduled for the selected model. Provide suitable wall support, fixings and access clearances for the installation.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B38135(P08)	Wall Mounted Grade 304 Stainless Steel Boot Rack for 8 Boot Pairs. 1050 mm (L) x 396 mm (W) x 924 mm (H); Square Tubular Prongs and Integral Mounting Brackets.	Boot Pairs: 8 Overall dimensions: 1050 x 396 x 924 mm (L x W x H)
B38135(P12)	Wall Mounted Grade 304 Stainless Steel Boot Rack for 12 Boot Pairs. 1050 mm (L) x 396 mm (W) x 924 mm (H); Square Tubular Prongs and Integral Mounting Brackets.	Boot Pairs: 12 Overall dimensions: 1050 x 396 x 924 mm (L x W x H)
B38135(P16)	Wall Mounted Grade 304 Stainless Steel Boot Rack for 16 Boot Pairs. 1050 mm (L) x 396 mm (W) x 1134 mm (H); Square Tubular Prongs and Integral Mounting Brackets.	Boot Pairs: 16 Overall dimensions: 1050 x 396 x 1134 mm (L x W x H)
B38135(P20)	Wall Mounted Grade 304 Stainless Steel Boot Rack for 20 Boot Pairs. 1310 mm (L) x 396 mm (W) x 1134 mm (H); Square Tubular Prongs and Integral Mounting Brackets.	Boot Pairs: 20 Overall dimensions: 1310 x 396 x 1134 mm (L x W x H)
B38135(P24)	Wall Mounted Grade 304 Stainless Steel Boot Rack for 24 Boot Pairs. 1050 mm (L) x 396 mm (W) x 1590 mm (H); Square Tubular Prongs and Integral Mounting Brackets.	Boot Pairs: 24 Overall dimensions: 1050 x 396 x 1590 mm (L x W x H)
B38135(P36)	Wall Mounted Grade 304 Stainless Steel Boot Rack for 36 Boot Pairs. 1570 mm (L) x 396 mm (W) x 1590 mm (H); Square Tubular Prongs and Integral Mounting Brackets.	Boot Pairs: 36 Overall dimensions: 1570 x 396 x 1590 mm (L x W x H)

03 Functional features

01 Six boot-pair capacities

Select storage for 8, 12, 16, 20, 24 or 36 pairs of boots.

02 Grade 304 stainless steel

The rack is manufactured from Grade 304 stainless steel.

03 Individual square tubular prongs

Separate square tubular prongs provide a defined storage position for each boot.

04 Integral mounting brackets

Integral brackets provide the wall mounting arrangement. Select suitable fixings for the supporting wall.

05 396 mm width across the range

All six specified models are 396 mm wide; lengths and heights vary by model.

06 Organised wall storage

Position the rack to keep work boots organised with suitable access and cleaning clearance around the installation.


04 Application information


Intended applications	Change Rooms & Locker Rooms, Footwear Storage & Drying, PPE Storage & Dispensing
Industries	Commercial Laundries, Construction, Dairy & Beverage Processing, Farms & Orchards, Fish & Seafood Processing, Food & Beverage Processing, Fresh Produce & Packhouses, General Manufacturing, Hospitals & Clinics, Institutional & Contract Catering, Meat & Poultry Processing, Mining & Quarrying, Pharmaceutical Manufacturing, Research Laboratories, Veterinary Services

05 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

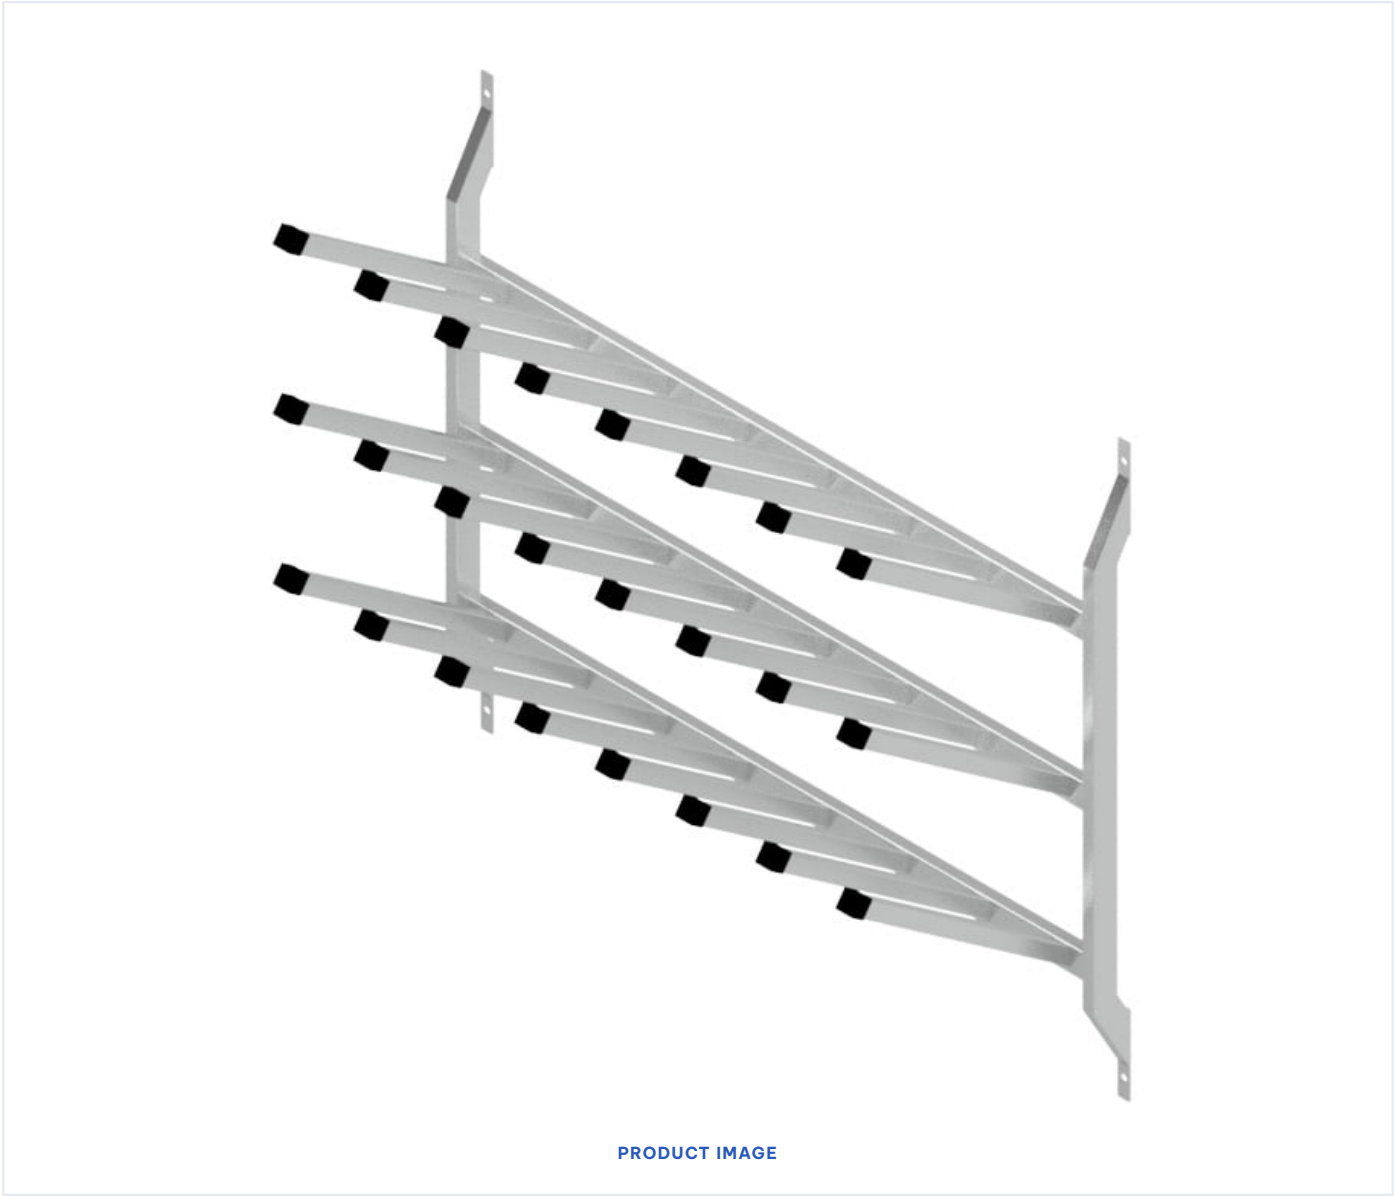


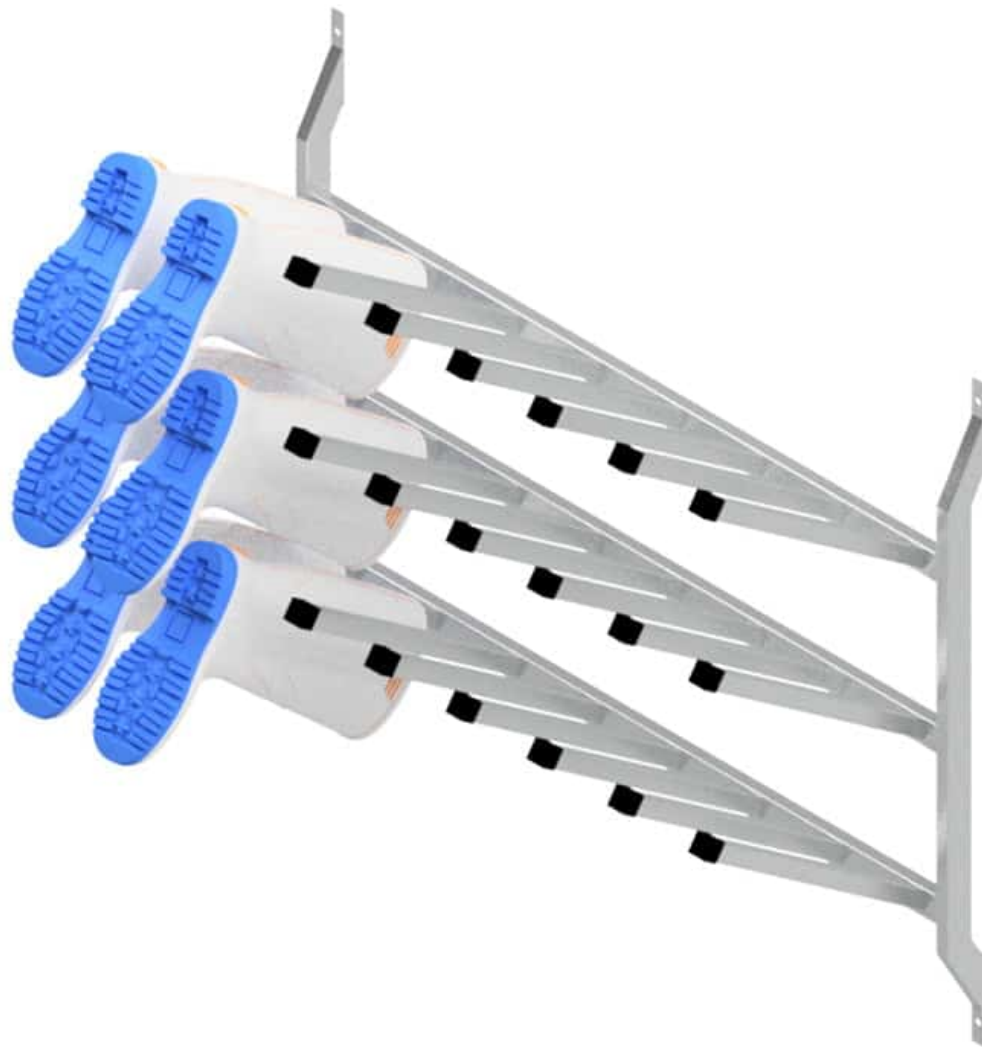


PRODUCT IMAGE

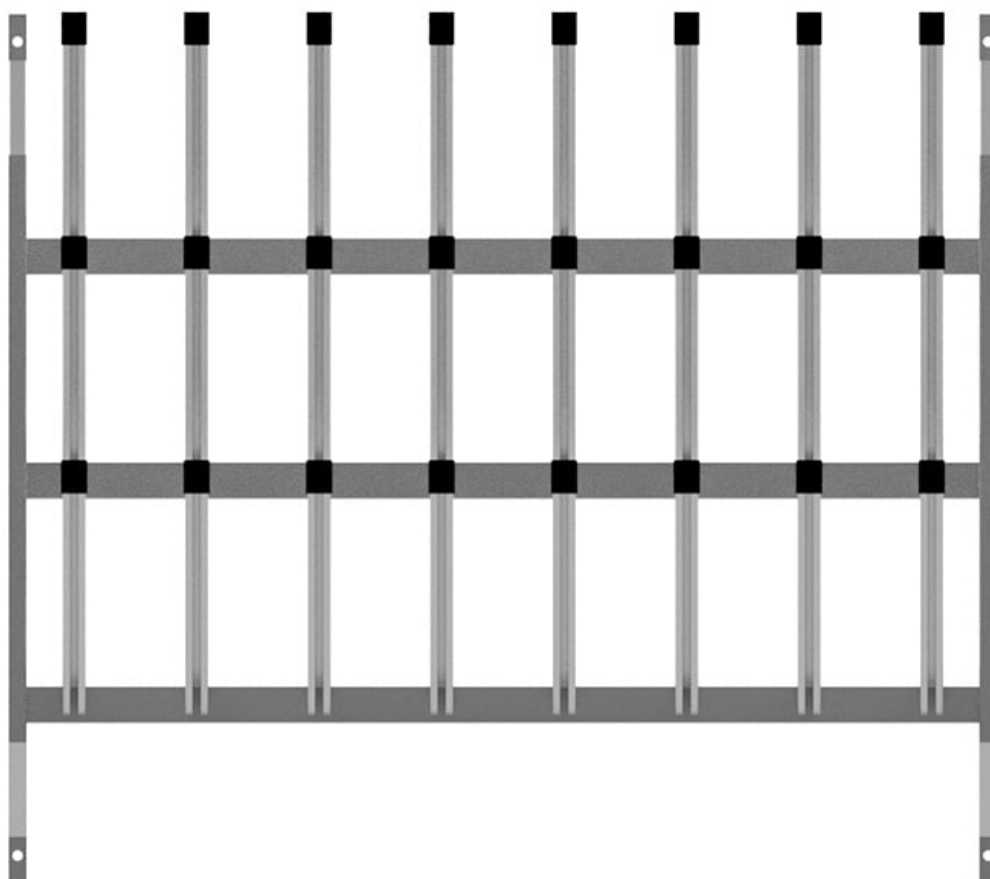

PRODUCT IMAGE

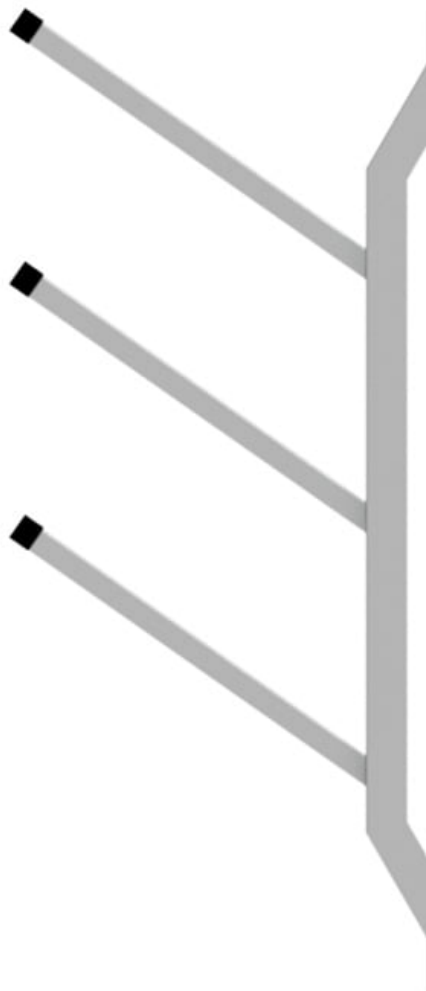

PRODUCT IMAGE

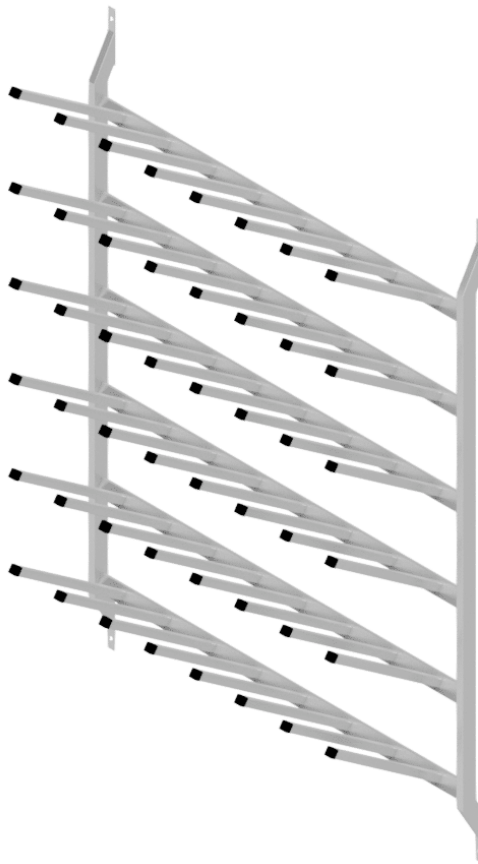

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.