

PRODUCT RANGE SPECIFICATION

B38136 – Free Standing Eco Boot Rack

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B38136{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Free-standing Eco boot rack for organising footwear in changing rooms and production facilities. Constructed entirely from Grade 304 stainless steel, the rack offers excellent corrosion resistance, a hygienic surface finish and long-term durability under heavy-duty daily use. Its off-ground storage format promotes improved hygiene by elevating boots away from the floor, reducing contamination risk and allowing thorough cleaning around and beneath the structure. The solid, fully welded frame ensures structural integrity, while smooth, radiused surfaces support fast and efficient sanitation routines. By positioning boots on solid stainless-steel round-bar prongs, the rack enhances airflow for drying whilst maintaining the cleanliness required in regulated environments. Prong spacing is ergonomically set for quick loading and removal of footwear, supporting multi-shift operations with high personnel throughput. The unit is available in capacities ranging from 8 to 36 pairs, making it suitable for facilities of varying size and staffing levels. Its free-standing configuration allows for placement against walls or in open-plan changing areas without requiring permanent fixing, though the stable, fully welded base ensures secure positioning during use. Its simple, open design integrates seamlessly into existing workflow layouts, providing long-term reliability in environments where hygiene, durability and operational efficiency are essential.
---------------------	---

Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B38136. Free Standing Eco Boot Rack. Boot Pairs: 8, 12, 16, 20, 24, 36. Constructed entirely from Grade 304 stainless steel, the rack offers excellent corrosion resistance, a hygienic surface finish and long-term durability under heavy-duty daily use. By positioning boots on solid stainless-steel round-bar prongs, the rack enhances airflow for drying whilst maintaining the cleanliness required in regulated environments.
--------------------------	--

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B38136(P08)	FREE STANDING SINGLE SIDED BOOT RACK TO B38136(PSS) L1065 X W500 X H983 8 BOOT PAIRS	Boot Pairs: 8
B38136(P12)	FREE STANDING SINGLE SIDED BOOT RACK TO B38136(PSS) L1065 X W500 X H983 12 BOOT PAIRS	Boot Pairs: 12
B38136(P16)	FREE STANDING SINGLE SIDED BOOT RACK TO B38136(PSS) L1065 X W500 X H1238 16 BOOT PAIRS	Boot Pairs: 16

02 Models and configurations

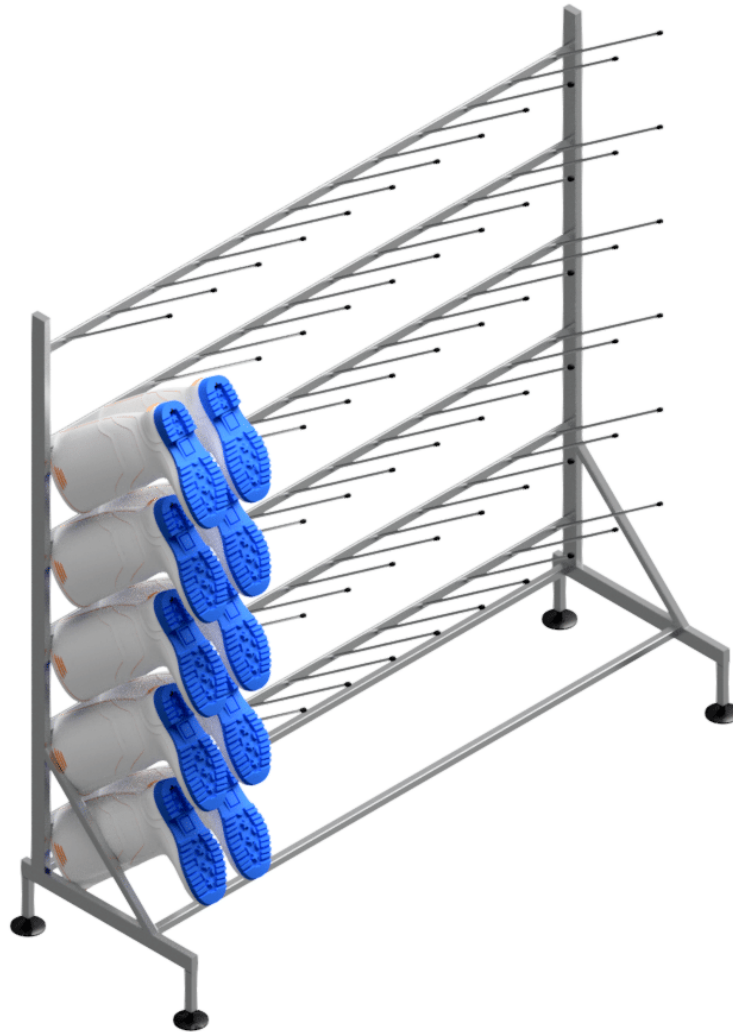
MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B38136(P20)	FREE STANDING SINGLE SIDED BOOT RACK TO B38136(PSS) L1065 X W500 X H1493 20 BOOT PAIRS	Boot Pairs: 20
B38136(P24)	FREE STANDING SINGLE SIDED BOOT RACK TO B38136(PSS) L1065 X W500 X H1748 24 BOOT PAIRS	Boot Pairs: 24
B38136(P36)	FREE STANDING SINGLE SIDED BOOT RACK TO B38136(PSS) L1598 X W500 X H1748 36 BOOT PAIRS	Boot Pairs: 36

03 Application information

Intended applications	Footwear Storage & Drying
Industries	Food & Beverage Processing, Meat & Poultry Processing, Pharmaceutical Manufacturing

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images**PRODUCT IMAGE**

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.