
MODEL SPECIFICATION

B38320(H05) – Hook Coat and Helmet Wall Mounted 5 Hooks

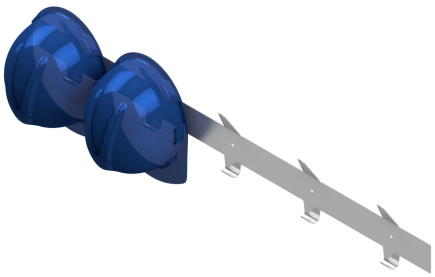

PRODUCT IMAGE

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Model	B38320(H05){PSS}	14 Nov 2026

01 Model specification

Wall Mounted Coat and Helmet Hook Grade 304 Stainless Steel, 500mm (L) × 130mm (W), with 5 Hooks, Dull-Polished Finish and Pre-Drilled Mounting Holes, Basterfield Model B38320(H05)

02 Technical specifications

PARAMETER	VALUE	UNIT
Number of Hooks	5	–

03 Model and supply data

Parent product	B38320 — Coat and Helmet Hook
Typical lead time	10–15 working days
Warranty	12 months

04 Specification notes

Configuration description

Wall-mounted Grade 304 stainless steel coat and helmet hook unit with 5 hooks, a dull-polished finish and pre-drilled mounting holes. Dimensions are 500mm (L) × 130mm (W).

Short Form Specification

SPECIFICATION USE
Use this description when specifying this model.

B38320(H05). Wall-mounted Grade 304 stainless steel coat and helmet hook unit with 5 hooks, a dull-polished finish and pre-drilled mounting holes. Dimensions are 500mm (L) × 130mm (W).

Detailed specification

- Model: B38320(H05)
- Number of hooks: 5
- Material: Grade 304 stainless steel
- Finish: Dull polished
- Mounting: Wall mounted, pre-drilled holes
- Dimensions: 500mm (L) × 130mm (W)

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

05 Frequently asked questions

How many hooks can I specify?

The range is available in 1, 5, 10 and 20-hook configurations.

How are the units mounted?

The units are wall mounted and supplied with pre-drilled mounting holes.

What material and finish are used?

The units are manufactured from Grade 304 stainless steel with a dull-polished finish.

E&OE. Specifications are subject to change without notice.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357