


MODEL SPECIFICATION

B52672(0600) – Sanitation Bath, Footwear, 1 Walkway



PRODUCT IMAGE

DOCUMENT SCOPE
Model

DOCUMENT REFERENCE
B52672(0600){PSS}

DATA STATUS
Published catalogue data

GENERATED ON
28 Oct 2026

01 Model specification

Footwear Sanitation Bath, Grade 304 Stainless Steel, 689mm (L) x 602mm (W) x 187mm (H) Overall, with Floor Mounting, 1 Walkway, Two Removable Aluminium Treadplate Inserts, Four Adjustable Feet and Side Drain Outlet, without Handrails; Bath Body Length 642mm. Overall Length Includes Feet Projection; Height Varies with Foot Adjustment and Is 187mm at the Stated Foot Setting

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	—	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Number of Walkways	1	—	—
Safety Handrails	No	—	—
Removable Insert	Aluminium Treadplate	—	Removable walking surface fitted to the footwear sanitation bath.
Length	689	mm	Overall outside length, including the feet projection.
Width	602	mm	Overall outside width.
Height	187	mm	Overall height above the floor. Height varies with foot adjustment.
Bath Body Length	642	mm	Length of the bath body, excluding the feet projection.
Insert Quantity	2	—	Number of removable treadplate inserts supplied with the item.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Feet Quantity	4	—	Number of feet supporting the bath.
Adjustable Feet	Yes	—	—
Drainage	Side Drain Outlet	—	—
Drain Outlet Centre Height	49	mm	Drain outlet centre height above the floor at the stated overall height.

03 Dimensions and mass

PARAMETER	VALUE	UNIT
Length	689	mm
Width	602	mm
Overall height	187	mm

04 Model and supply data

Parent product	B52672 – Footwear Sanitation Baths without Handrails
Typical lead time	10–15 working days
Warranty	12 months


05 Specification notes

Configuration description	B52672(0600) is a floor-mounted, single-walkway footwear sanitation bath with Grade 304 stainless steel main construction and two removable aluminium treadplate inserts. Lifting holes allow the inserts to be removed for access to the bath interior during cleaning. Overall outside dimensions are 689mm (L) x 602mm (W) x 187mm (H). The overall length includes the feet projection; the bath-body length is 642mm. Overall height varies with foot adjustment. Four screw-adjustable feet allow the bath to be levelled during installation. A low-level side drain outlet provides a drainage point for solution changes and cleaning. The outlet centre is 49mm above the floor at the stated overall height. This model is supplied without safety handrails.
Short Form Specification	SPECIFICATION USE Use this description when specifying this model. Basterfield B52672(0600). Floor-mounted footwear sanitation bath; one walkway; Grade 304 stainless steel main construction; two removable aluminium treadplate inserts with lifting holes; without handrails. Overall outside dimensions 689mm (L) x 602mm (W) x 187mm (H), including the feet projection. Bath-body length 642mm. Four screw-adjustable feet; overall height varies with foot adjustment. Side drain outlet, centre height 49mm at the stated overall height.


Detailed specification

Model: B52672(0600)
Main Construction: Grade 304 Stainless Steel
Overall Outside Dimensions: 689mm (L) x 602mm (W) x 187mm (H)
Overall Length Includes: Feet Projection
Bath Body Length: 642mm
Number of Walkways: 1
Safety Handrails: No
Removable Inserts: 2 Aluminium Treadplate Panels with Lifting Holes
Feet: 4 Screw-Adjustable Feet
Height Adjustment: Overall Height Varies with Foot Adjustment
Drainage: Side Drain Outlet
Drain Outlet Centre Height: 49mm Above Floor at the Stated Overall Height


Product drawings and images

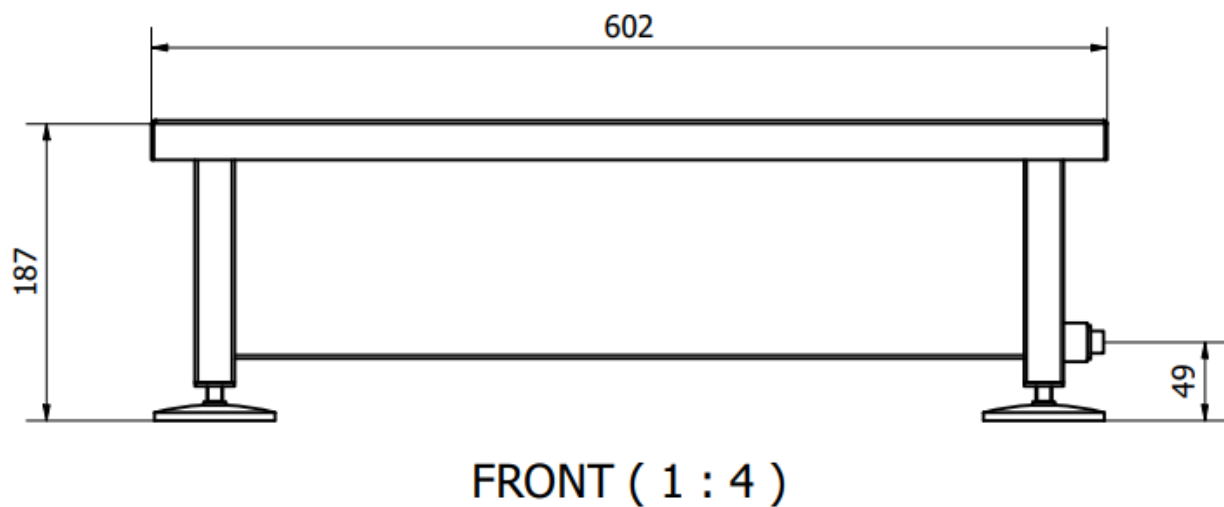

FRONT VIEW · Front view. Dimensions in mm; image reproduced to fit the page.

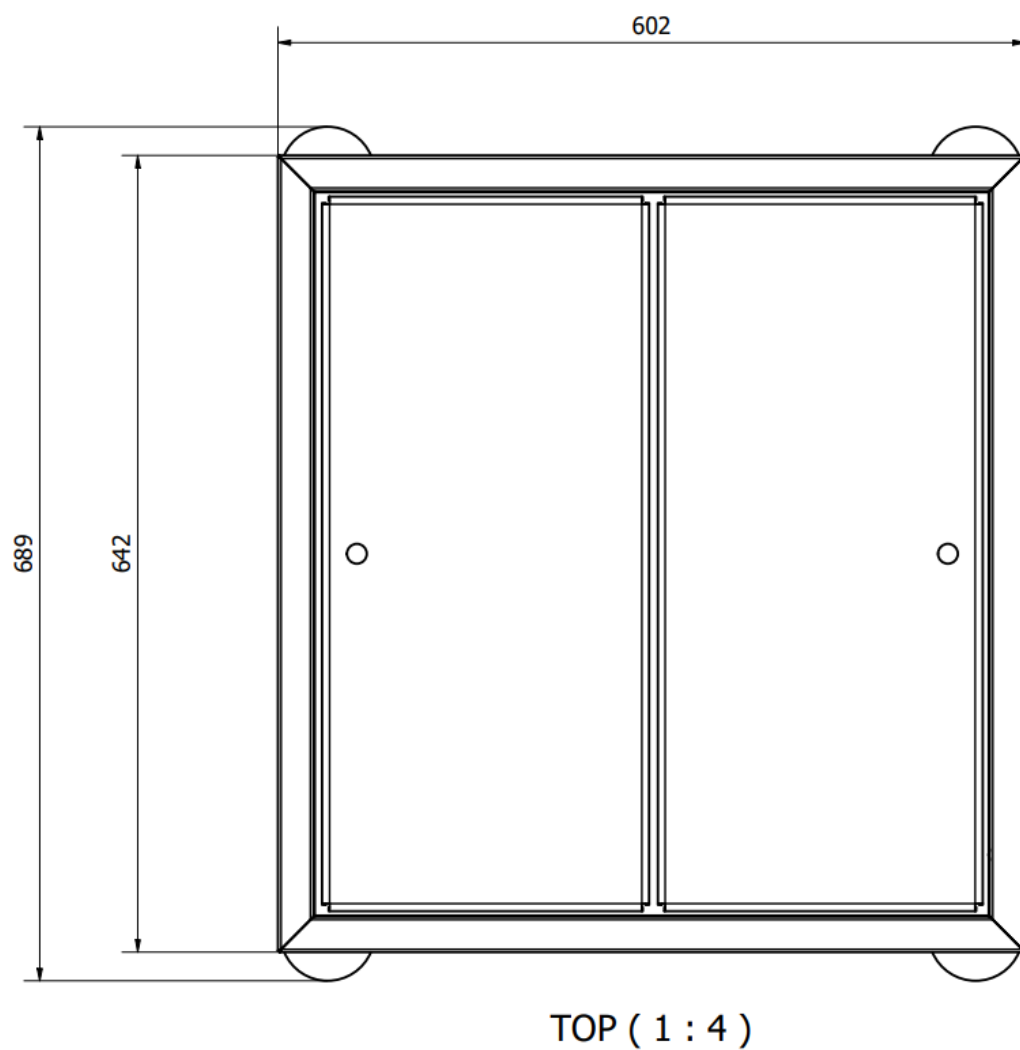

TOP VIEW · Top view. Dimensions in mm; image reproduced to fit the page.

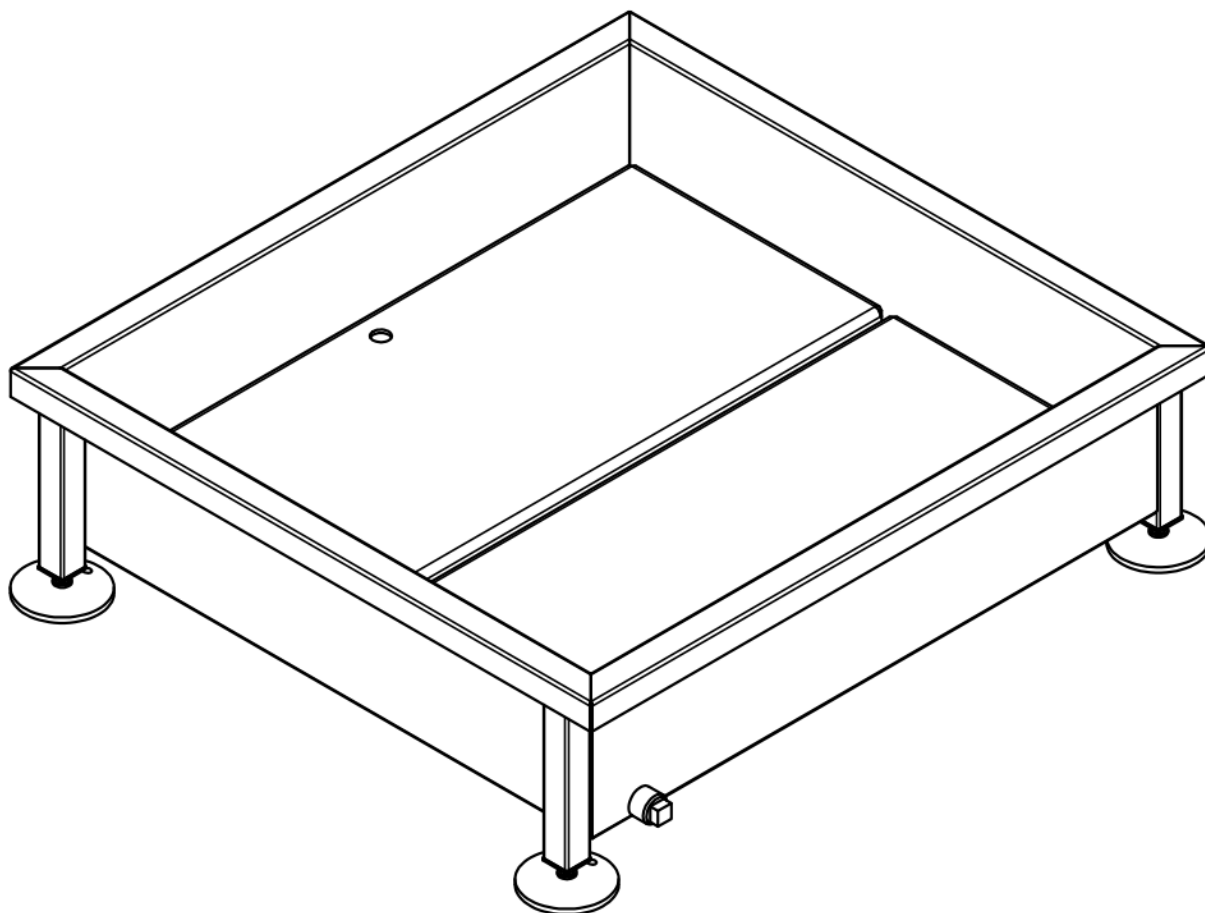

TOP RIGHT (1 : 4)

ISOMETRIC VIEW · Top-right isometric view; image reproduced to fit the page.

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.