
MODEL SPECIFICATION

B52672(0600) – Sanitation Bath, Footwear, 1 Walkway



PRODUCT IMAGE

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Model	B52672(0600){PSS}	18 Nov 2026

01 Model specification

Footwear Sanitation Bath, Grade 304 Stainless Steel, 689mm (L) x 602mm (W) x 187mm (H) Overall, with Floor Mounting, 1 Walkway, Two Removable Aluminium Treadplate Inserts, Four Adjustable Feet and Side Drain Outlet, without Handrails; Bath Body Length 642mm. Overall Length Includes Feet Projection; Height Varies with Foot Adjustment and Is 187mm at the Stated Foot Setting

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Number of Walkways	1	–	–
Safety Handrails	No	–	–
Removable Insert	Aluminium Treadplate	–	Removable walking surface fitted to the footwear sanitation bath.
Length	689	mm	Overall outside length, including the feet projection.
Width	602	mm	Overall outside width.
Height	187	mm	Overall height above the floor. Height varies with foot adjustment.
Bath Body Length	642	mm	Length of the bath body, excluding the feet projection.
Insert Quantity	2	–	Number of removable treadplate inserts supplied with the item.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Feet Quantity	4	—	Number of feet supporting the bath.
Adjustable Feet	Yes	—	—
Drainage	Side Drain Outlet	—	—
Drain Outlet Centre Height	49	mm	Drain outlet centre height above the floor at the stated overall height.

03 Dimensions and mass

PARAMETER	VALUE	UNIT
Length	689	mm
Width	602	mm
Overall height	187	mm

04 Model and supply data

Parent product	B52672 — Footwear Sanitation Baths without Handrails
Typical lead time	10–15 working days
Warranty	12 months

05 Specification notes

Configuration description

B52672(0600) is a floor-mounted, single-walkway footwear sanitation bath with Grade 304 stainless steel main construction and two removable aluminium treadplate inserts. Lifting holes allow the inserts to be removed for access to the bath interior during cleaning.

Overall outside dimensions are 689mm (L) x 602mm (W) x 187mm (H). The overall length includes the feet projection; the bath-body length is 642mm. Overall height varies with foot adjustment.

Four screw-adjustable feet allow the bath to be levelled during installation. A low-level side drain outlet provides a drainage point for solution changes and cleaning. The outlet centre is 49mm above the floor at the stated overall height. This model is supplied without safety handrails.

Short Form Specification

> **SPECIFICATION USE**
> Use this description when specifying this model.

Basterfield B52672(0600). Floor-mounted footwear sanitation bath; one walkway; Grade 304 stainless steel main construction; two removable aluminium treadplate inserts with lifting holes; without handrails. Overall outside dimensions 689mm (L) x 602mm (W) x 187mm (H), including the feet projection. Bath-body length 642mm. Four screw-adjustable feet; overall height varies with foot adjustment. Side drain outlet, centre height 49mm at the stated overall height.

Detailed specification	Model: B52672(0600) Main Construction: Grade 304 Stainless Steel Overall Outside Dimensions: 689mm (L) x 602mm (W) x 187mm (H) Overall Length Includes: Feet Projection Bath Body Length: 642mm Number of Walkways: 1 Safety Handrails: No Removable Inserts: 2 Aluminium Treadplate Panels with Lifting Holes Feet: 4 Screw-Adjustable Feet Height Adjustment: Overall Height Varies with Foot Adjustment Drainage: Side Drain Outlet Drain Outlet Centre Height: 49mm Above Floor at the Stated Overall Height

06 Frequently asked questions

What is the B52672 range used for?

B52672 baths provide a defined footwear sanitation point at work-area entrances and transitions into production areas, as part of the site footwear hygiene procedure. Applications include food and beverage facilities, meat and poultry processing areas, and changing-room exits leading into production.

What is the difference between B52672 and B52673?

B52672 is supplied without safety handrails. B52673 is the corresponding range with safety handrails. Both ranges offer removable aluminium treadplate or Grade 304 stainless steel grid inserts.

Which removable inserts can I choose?

Choose removable aluminium treadplate inserts or a removable Grade 304 stainless steel grid insert. The listed single-walkway models are B52672(0600) with aluminium treadplate and B52672(0600G) with a stainless steel grid.

What material is used for the bath construction?

The main construction is Grade 304 stainless steel. The treadplate inserts are aluminium, while the stainless steel grid option is also Grade 304.

Which walkway widths are available?

The range is available in one, two and three walkway widths. The two listed models are the single-walkway versions. Contact Basterfield for the wider configurations and their model-specific dimensions and pricing.

What are the overall dimensions of B52672(0600)?

Overall outside dimensions are 689mm (L) x 602mm (W) x 187mm (H). The overall length includes the feet projection; the bath-body length is 642mm. Use the outside dimensions when planning the installation space. Overall height varies with foot adjustment.


How are the inserts, feet and drainage arranged on B52672(0600)?

The aluminium model has two removable treadplate panels with lifting holes, four screw-adjustable feet for levelling and a low-level side drain outlet for solution changes and cleaning. The outlet centre is 49mm above the floor at the stated overall height.


How do I access the bath interior for cleaning?

The walking inserts lift out to provide access to the bath interior. The B52672(0600) aluminium model has two treadplate panels with lifting holes to help with removal and a side drain outlet for emptying the bath.


Product drawings and images

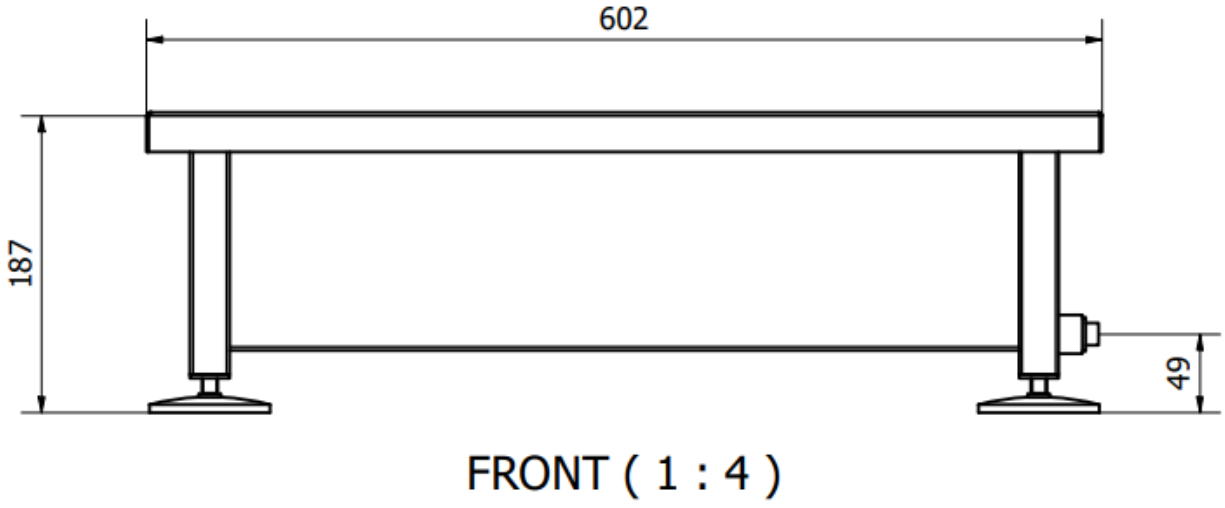

FRONT VIEW · Front view. Dimensions in mm; image reproduced to fit the page.

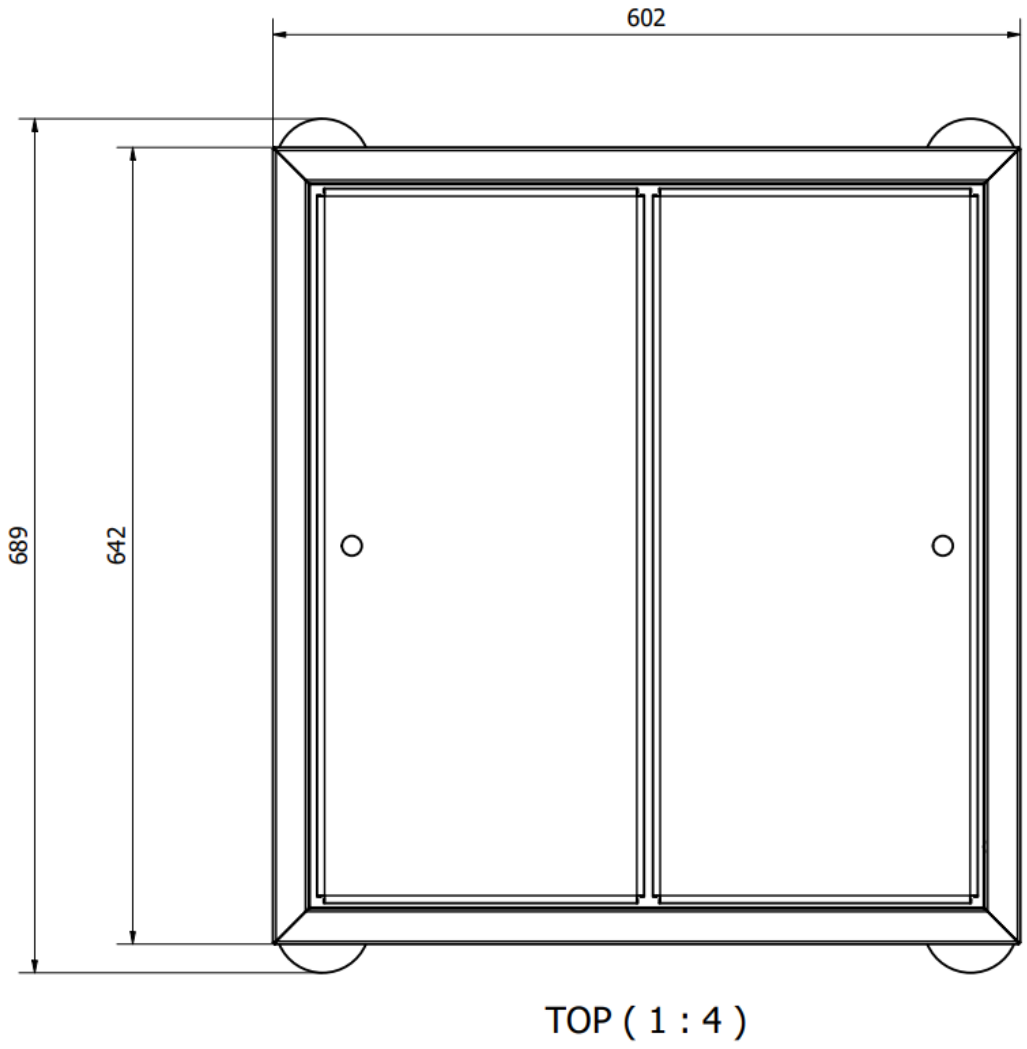

TOP VIEW · Top view. Dimensions in mm; image reproduced to fit the page.

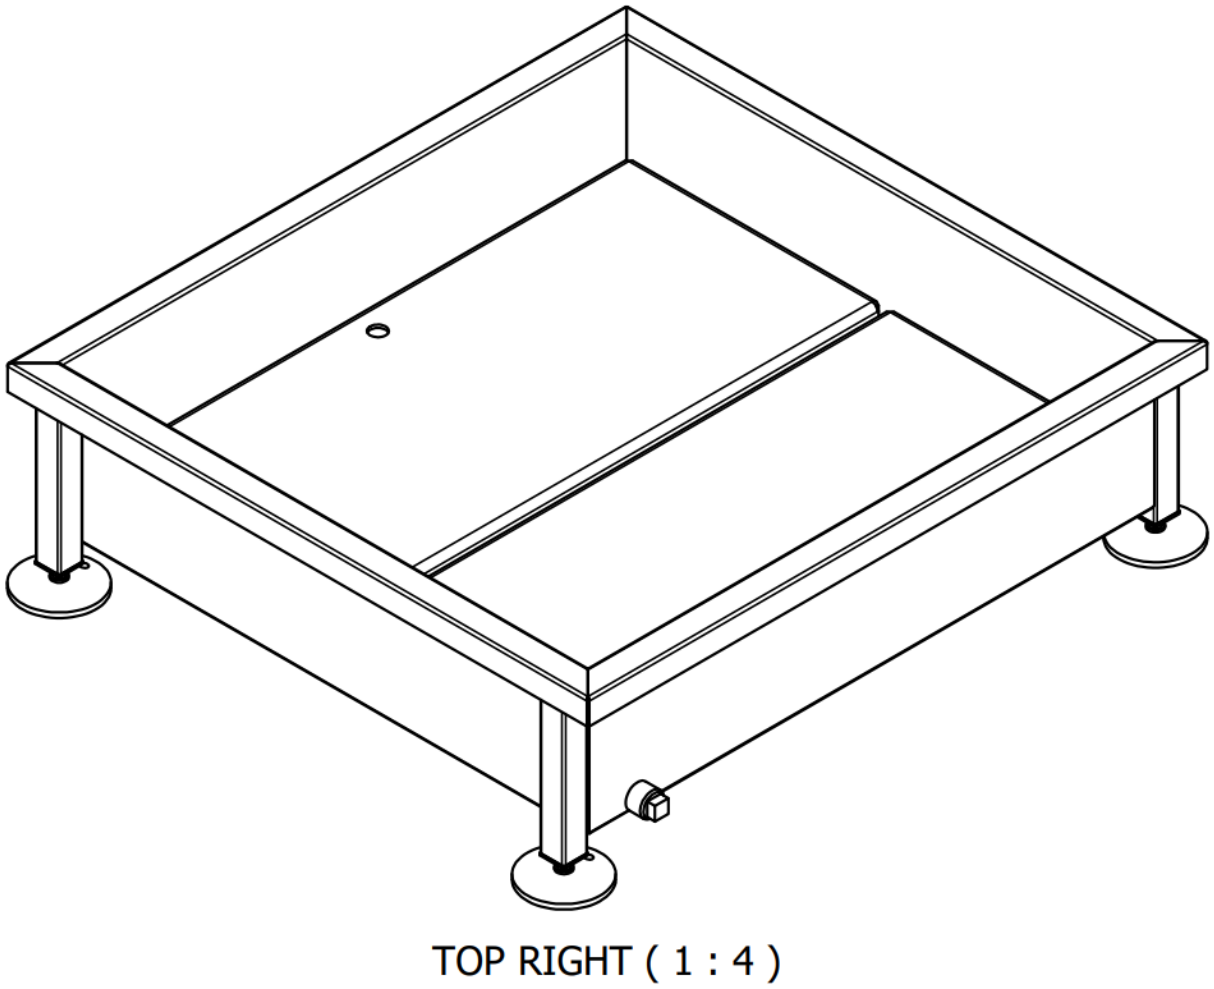

ISOMETRIC VIEW · Top-right isometric view; image reproduced to fit the page.

E&OE. Specifications are subject to change without notice.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357