PRODUCT RANGE SPECIFICATION

B60140 – Wall-Mounted Stainless Steel Cleaner's Sink with Bucket Grid



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B60140{PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b60140-wall-mounted-stainless-steel-cleaners-sink-with-bucket-grid#specifications

01 Product description and specification

Product description

Wall-mounted Grade 304 stainless steel cleaner's sink with hinged bucket grid, protective rubber bumpers and 40 mm waste outlet. Choose 480 or 600 mm length, with 500 mm width and 230 mm bowl depth as standard. A 300 mm bowl depth is available under advanced customisation.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B60140 wall-mounted Grade 304 stainless steel cleaner's sink with deep-drawn bowl, coved corners, hinged bucket grid, protective rubber bumpers, gallows mounting brackets and 40 mm waste outlet. Select 480 or 600 mm length x 500 mm width. 230 mm bowl depth is standard. Enable advanced customisation to choose a 300 mm bowl depth. Coordinate wall support, mounting position and plumbing fittings for the site.

02 Configuration options

Length	480 mm; 600 mm

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 **Grade 304 stainless steel**
Stainless steel construction with a deep-drawn bowl and coved corners.

02 **Hinged bucket grid included**
The hinged grid provides a bucket support above the bowl and lifts for access to the sink.

03 **230 mm standard bowl depth**
Choose 480 or 600 mm length x 500 mm width. 230 mm bowl depth is standard. Enable advanced customisation to choose a 300 mm bowl depth.

04 **Wall-mounted gallows brackets**
Heavy-duty gallows brackets provide the wall mounting arrangement.

05 **40 mm waste outlet**

The bowl has a 40 mm waste outlet for connection to the site drainage.

06 **Protective rubber bumpers**

Rubber bumpers are fitted to the cleaner's sink.

04 Application information

Intended applications	Healthcare Utility Rooms, Hygienic Wash-Down & Cleaning
Industries	Aged Care & Nursing Homes, Colleges & Universities, Commercial Laundries, Food & Beverage Processing, General Manufacturing, Government & Public Sector, Hospitals & Clinics, Hotels & Lodges, Institutional & Contract Catering, Research Laboratories, Restaurants & Cafés, Schools

05 Supply and support

Typical lead time	10–15 working days
Warranty	24 months

06 Frequently asked questions

What size options are available?

Choose 480 or 600 mm length x 500 mm width. 230 mm bowl depth is standard. Enable advanced customisation to choose a 300 mm bowl depth.

What is the specification of B60140(600)?

B60140(600) is 600 mm long and 500 mm wide, with the standard 230 mm bowl depth. It is wall mounted and includes a hinged bucket grid, rubber bumpers and a 40 mm waste outlet. For a 300 mm bowl depth, enable advanced customisation and select B60140(600x300).

Is the bucket grid included?

Yes. A hinged bucket grid is included on the four listed B60140 configurations.

Does bowl depth mean the front-to-back size?

No. Bowl depth is the vertical depth of the bowl. The front-to-back width is 500 mm. Set the installation height above the floor separately.

How is the sink mounted and connected?

The sink is wall mounted on gallows brackets. Confirm wall support, fixing details, mounting height, water supply fittings and the 40 mm waste connection for the site.

Where can the cleaner's sink be used?

Use it in janitorial and housekeeping rooms and dedicated cleaning support areas at hospitality, healthcare, education, catering, laundry, laboratory and industrial premises.


How should the sink be cleaned?

Use cleaning products and methods suitable for Grade 304 stainless steel. Raise the hinged grid for access and follow the facility cleaning procedure.


Product drawings and images



PRODUCT IMAGE

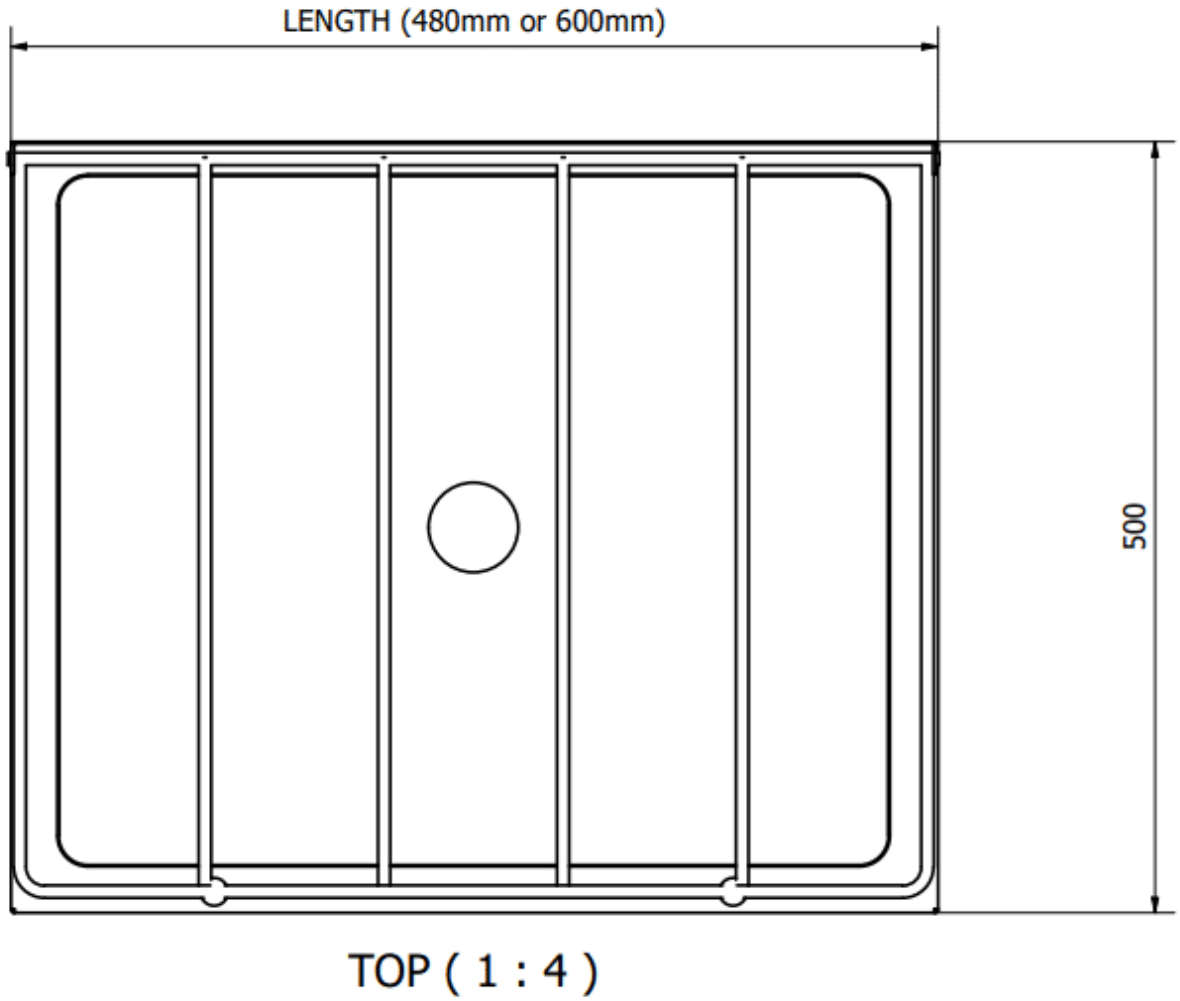

PRODUCT IMAGE

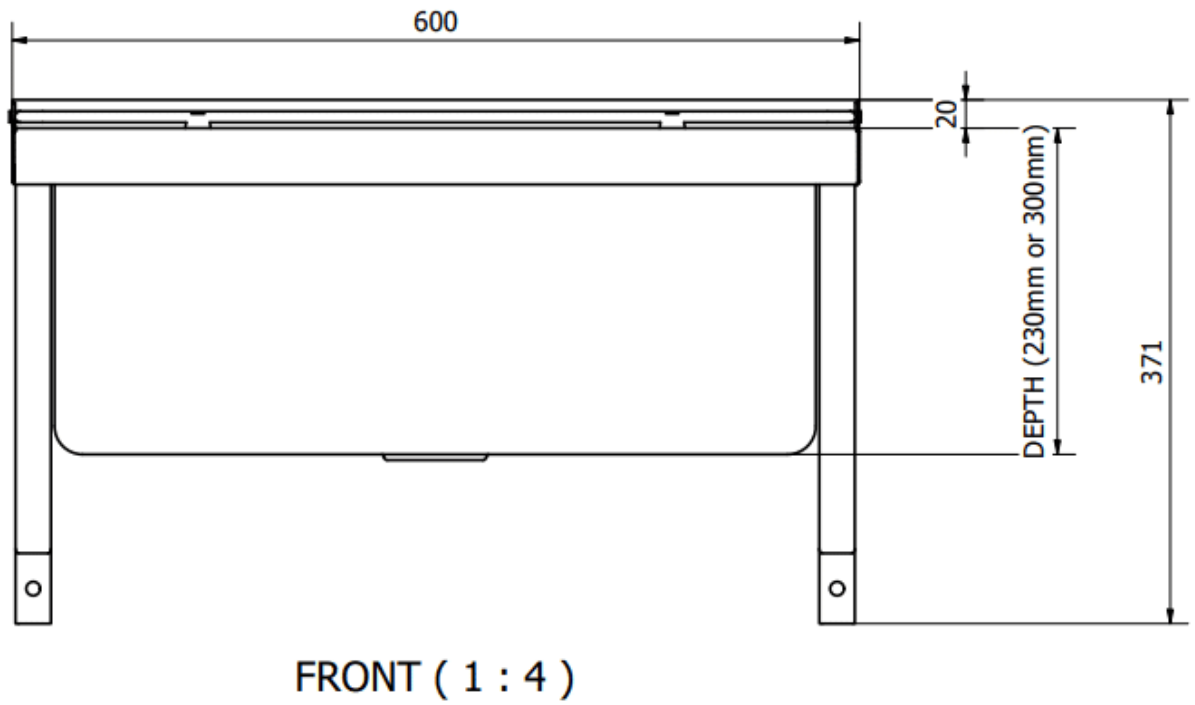

FRONT (1 : 4)

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.