

PRODUCT RANGE SPECIFICATION

B60140 – Wall-Mounted Stainless Steel Cleaner's Sink with Bucket Grid



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

B60140{PSS}

DATA STATUS

Published catalogue data

GENERATED ON

4 Oct 2026

01 Product description and specification

Product description

The Basterfield B60140 cleaner's sink provides a dedicated washing point for buckets and cleaning equipment in janitorial and utility rooms. It is manufactured from Grade 304 stainless steel with a deep-drawn bowl and coved corners. A hinged bucket grid supports the bucket above the bowl; protective rubber bumpers are fitted to the sink.

The range is wall mounted on heavy-duty gallows brackets. The top-view drawing specifies 480 or 600 mm length and 500 mm width. 230 mm bowl depth is standard. Enable advanced customisation to choose a 300 mm bowl depth. Bowl depth describes the vertical depth of the bowl. The front-to-back width is 500 mm; set the installation height above the floor separately.

B60140(480) has a 480 mm length and 230 mm bowl depth. B60140(480-300) has a 480 mm length and 300 mm bowl depth. B60140(600) has a 600 mm length and 230 mm bowl depth. B60140(600x300) has a 600 mm length and 300 mm bowl depth. All four configurations include the hinged bucket grid and a 40 mm waste outlet.

Use the sink in housekeeping and janitorial rooms at hotels, catering premises, healthcare facilities, schools and other workplaces. It also suits dedicated cleaning support areas in laundries, food-processing premises, laboratories, factories and public buildings.

Confirm the wall support, mounting position, water supply fittings and waste connection for the installation. Allow access to raise the grid, handle buckets and clean the bowl and surrounding surfaces. Clean using products and methods suitable for Grade 304 stainless steel and the facility cleaning procedure.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B60140 wall-mounted Grade 304 stainless steel cleaner's sink with deep-drawn bowl, coved corners, hinged bucket grid, protective rubber bumpers, gallows mounting brackets and 40 mm waste outlet. Select 480 or 600 mm length x 500 mm width. 230 mm bowl depth is standard. Enable advanced customisation to choose a 300 mm bowl depth. Coordinate wall support, mounting position and plumbing fittings for the site.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B60140(480)	Wall-Mounted Grade 304 Stainless Steel Cleaner's Sink, 480 mm (L) x 500 mm (W), with 230 mm Bowl Depth, Hinged Bucket Grid, Rubber Bumpers and 40 mm Waste Outlet.	Depth (mm): 230 mm Length: 480 mm
B60140(480-300)	Wall-Mounted Grade 304 Stainless Steel Cleaner's Sink, 480 mm (L) x 500 mm (W), with 300 mm Bowl Depth, Hinged Bucket Grid, Rubber Bumpers and 40 mm Waste Outlet.	Depth (mm): 300 mm Length: 480 mm
B60140(600)	Wall-Mounted Grade 304 Stainless Steel Cleaner's Sink, 600 mm (L) x 500 mm (W), with 230 mm Bowl Depth, Hinged Bucket Grid, Rubber Bumpers and 40 mm Waste Outlet.	Depth (mm): 230 mm Length: 600 mm Overall dimensions: 600 x 500 x – mm (L x W x H)
B60140(600x300)	Wall-Mounted Grade 304 Stainless Steel Cleaner's Sink, 600 mm (L) x 500 mm (W), with 300 mm Bowl Depth, Hinged Bucket Grid, Rubber Bumpers and 40 mm Waste Outlet.	Depth (mm): 300 mm Length: 600 mm

03 Functional features

01 Grade 304 stainless steel	Stainless steel construction with a deep-drawn bowl and coved corners.
02 Hinged bucket grid included	The hinged grid provides a bucket support above the bowl and lifts for access to the sink.
03 230 mm standard bowl depth	Choose 480 or 600 mm length x 500 mm width. 230 mm bowl depth is standard. Enable advanced customisation to choose a 300 mm bowl depth.
04 Wall-mounted gallows brackets	Heavy-duty gallows brackets provide the wall mounting arrangement.
05 40 mm waste outlet	The bowl has a 40 mm waste outlet for connection to the site drainage.
06 Protective rubber bumpers	Rubber bumpers are fitted to the cleaner's sink.

04 Application information


Intended applications	Healthcare Utility Rooms, Hygienic Wash-Down & Cleaning
Industries	Aged Care & Nursing Homes, Colleges & Universities, Commercial Laundries, Food & Beverage Processing, General Manufacturing, Government & Public Sector, Hospitals & Clinics, Hotels & Lodges, Institutional & Contract Catering, Research Laboratories, Restaurants & Cafés, Schools

05 Supply and support

Typical lead time	10–15 working days
Warranty	24 months


Product drawings and images

**PRODUCT IMAGE**

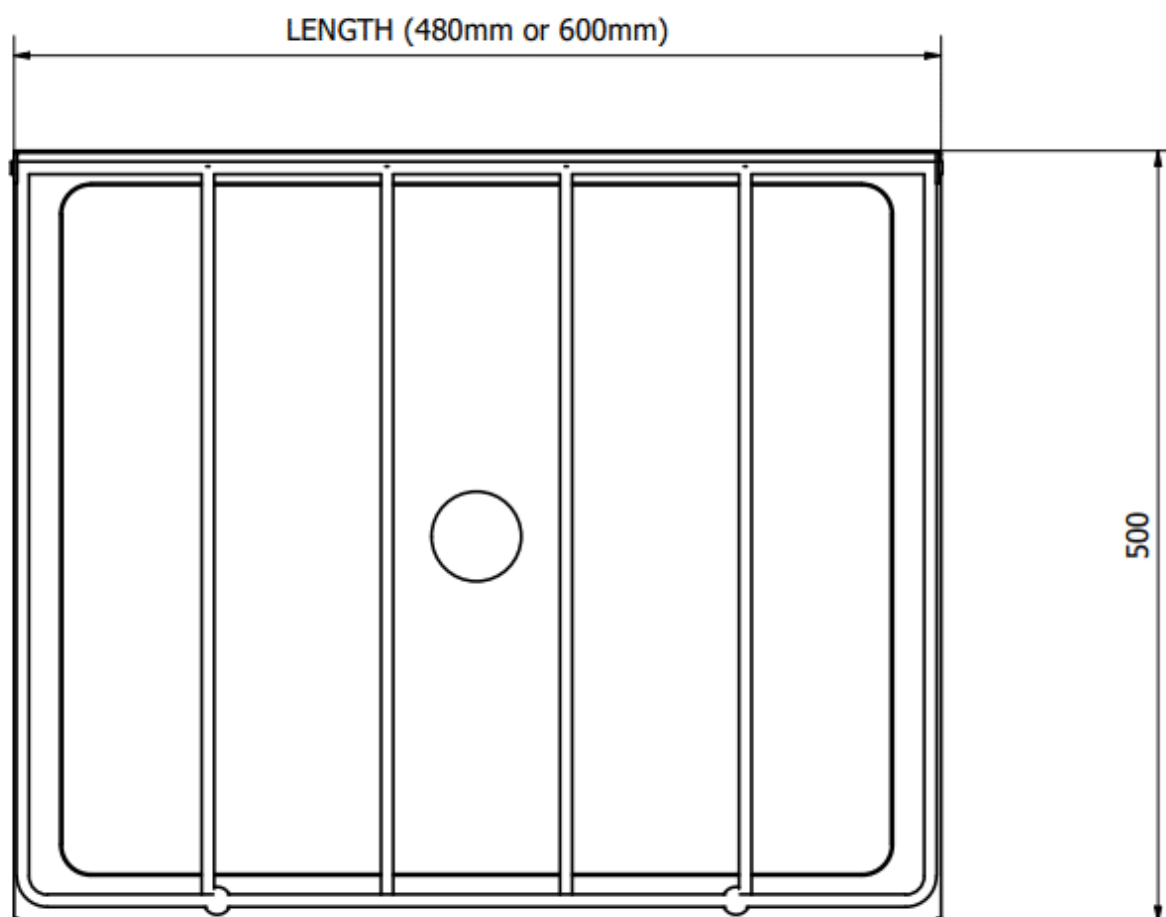

TOP (1 : 4)

PRODUCT IMAGE

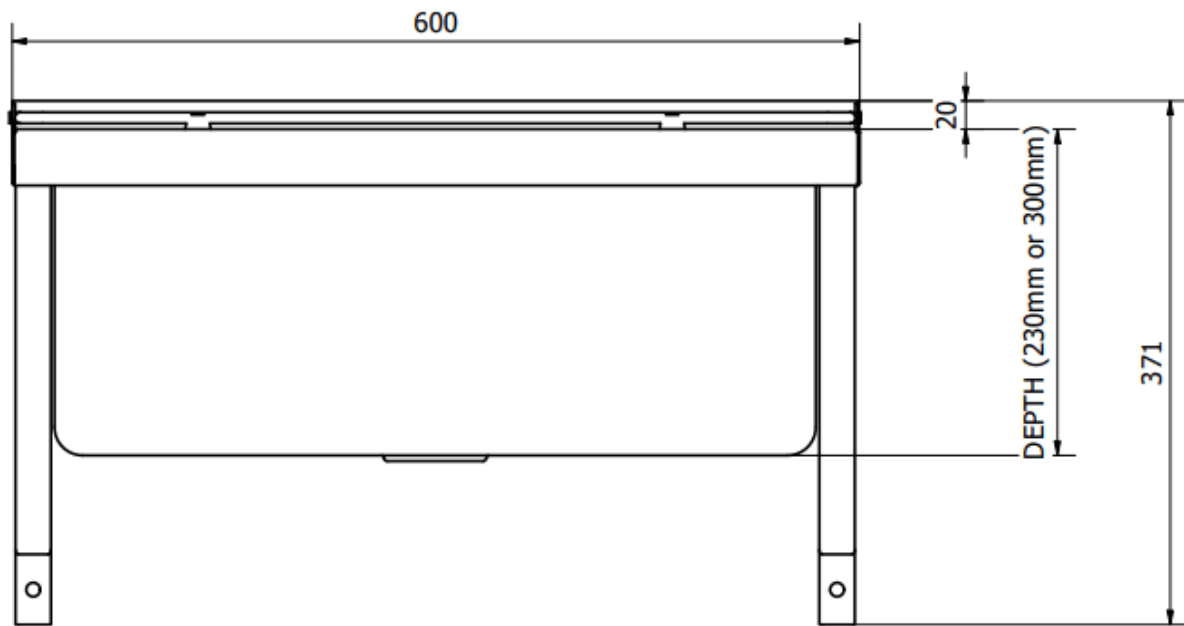

FRONT (1 : 4)

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.