PRODUCT RANGE SPECIFICATION

B65166(2P) – Manual Boot Washer with Sole Brushes



PRODUCT IMAGE · B65166(1P) shown for the 2-station layout. B65166(2P) uses sole-cleaning brushes only; both models include a hand-held brush. Refer to current specifications for mixer details.

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B65166(2P){PSS}	16 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b651662p-boot-scrubbers-with-sole-brush-configuration#specifications

01 Product description and specification

Product description	Manual boot washer with fixed sole-cleaning brushes and a hand-held water-fed brush at each station. Grade 304 stainless steel body, frame and handrails, with other materials used for functional components.
Short Form Specification	**SPECIFICATION USE** Use this description when specifying this product range. Basterfield B65166(2P). Each station has fixed brushes for cleaning boot soles and a hand-held water-fed scrubbing brush for the sides and uppers. The fixed brush arrangement is for sole cleaning only. Grade 304 stainless steel body, frame, handrails and wash enclosure; galvanised mild steel rear cover, copper internal pipework and proprietary fittings of other materials. Hand-/wrist-operated mixer. 1½-inch BSPT waste outlet. Approximately 300 kPa nominal supply recommended; maximum 600 kPa at mixer, with pressure reduction where required. Freestanding on adjustable feet with footplates that may be anchored. Intended for one user per station resting one foot during cleaning; no standing or climbing. No separately certified maximum user-load rating. Overall dimensions (L x W x H): one station 610 x 650 x 1100 mm; two stations 1110 x 650 x 1100 mm; three stations 1610 x 650 x 1100 mm; four stations 2110 x 650 x 1100 mm.

02 Configuration options

Number of stations	Four; One; Three; Two

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 **Hand- or wrist-operated mixer lever**

Water flow is controlled by a mixer lever that can be operated by hand or wrist. Wrist operation reduces direct hand contact with the lever.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

02 **Key wash-area components in Grade 304 stainless steel**

The main body, structural frame, handrails and wetted surfaces of the wash enclosure are Grade 304 stainless steel. The complete assembly also includes a galvanised mild-steel rear cover, copper internal pipework, and functional components made from other suitable materials.

03 **1½-inch BSPT waste connection**

The standard waste outlet is 1½-inch BSP with a BSPT tapered thread. Outlet position depends on the selected station configuration, helping match the unit to the intended drainage layout.

04 **Installation-ready water-pressure guidance**

Connect to a normal reticulated water supply. A nominal supply pressure of approximately 300 kPa is recommended, and pressure at the mixer must not exceed 600 kPa. Where site pressure exceeds this limit, install a suitable pressure-reducing valve.

05 **Freestanding levelling feet with optional floor anchoring**

The unit is freestanding on adjustable feet for levelling. Where required, the adjustable footplates may be anchored to the floor to secure the unit.

06 **Fixed sole brushes and water-fed hand brush**

Each station combines fixed brushes for cleaning boot soles with a hand-held water-fed scrubbing brush for the sides and uppers. The fixed brushes clean soles only.

07 **One to four stations**

Available with one, two, three or four stations: 610, 1110, 1610 or 2110 mm long respectively. All configurations are 650 mm wide and 1100 mm high.

04 Application information

Intended applications	Change Rooms & Locker Rooms, Footwear Cleaning and Disinfection
Industries	Dairy & Beverage Processing, Fish & Seafood Processing, Food & Beverage Processing, Fresh Produce & Packhouses, Meat & Poultry Processing

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Spare parts

PART CODE	DESCRIPTION	TYPE	RECOMMENDED QTY
B65166-04-02-04	Hand Brush Assembly for B65166 Manual Boot Washers, Basterfield Part B65166-04-02-04, for Cleaning Boot Sides and Uppers	Replacement part	1
B65166-04-02-05	Hand Brush Hose Assembly for B65166(2P) Manual Boot Washers with Pipe Clamp and Hand Brush Adaptor	Spare part	1

07 Frequently asked questions

What brushes are included?

Each station has fixed brushes for cleaning boot soles and a hand-held water-fed scrubbing brush for the sides and uppers. The fixed brush arrangement is for sole cleaning only.

How is the water operated?

Water flow is controlled by a mixer lever that can be operated by hand or wrist. Wrist operation can reduce direct hand contact with the lever. The current design uses a mixer rather than a push-button valve.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

Is the entire assembly Grade 304 stainless steel?

The main body, structural frame, handrails and wetted surfaces of the wash enclosure are Grade 304 stainless steel. The non-wetted rear cover panel is galvanised mild steel, the internal water pipework is copper, and proprietary valves and fittings may have a chrome-plated finish. Brushes and other functional components use materials appropriate to their function. The complete assembly is not manufactured entirely from Grade 304 stainless steel.

What waste connection is supplied?

The standard waste outlet is 1½-inch BSP with a BSPT tapered thread. Outlet position is specified by the selected station configuration.

What water pressure is recommended?

Connect to a normal reticulated water supply. A nominal supply pressure of approximately 300 kPa is recommended. Pressure at the mixer must not exceed 600 kPa; install a suitable pressure-reducing valve where the site pressure exceeds this limit.


How is the unit installed?

The unit is freestanding on adjustable feet for levelling. Where required, the adjustable footplates may be anchored to the floor to secure the unit.


What load is the unit designed for?

Normal use allows one user per station to rest one foot on the unit during cleaning. The unit is designed to support the loads imposed under these normal operating conditions. Users must not stand or climb on the unit. No separately certified maximum user-load rating has been established. The product is warranted for its intended use under normal operating conditions.

Product drawings and images

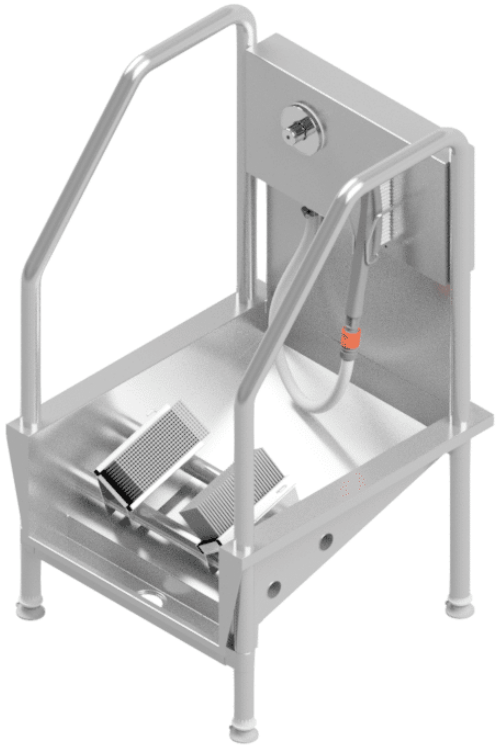


PRODUCT IMAGE · B65166(1P) shown for the 1-station layout. B65166(2P) uses sole-cleaning brushes only; both models include a hand-held brush. Refer to current specifications for mixer details.

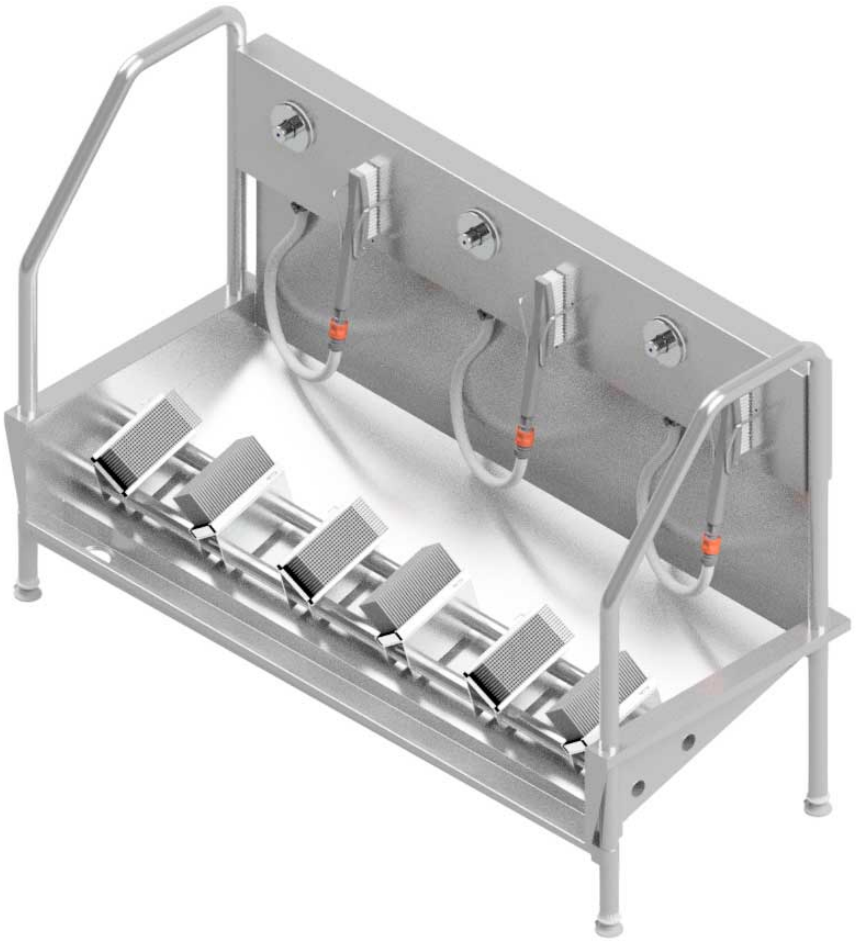

PRODUCT IMAGE · B65166(1P) shown for the 3-station layout. B65166(2P) uses sole-cleaning brushes only; both models include a hand-held brush. Refer to current specifications for mixer details.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

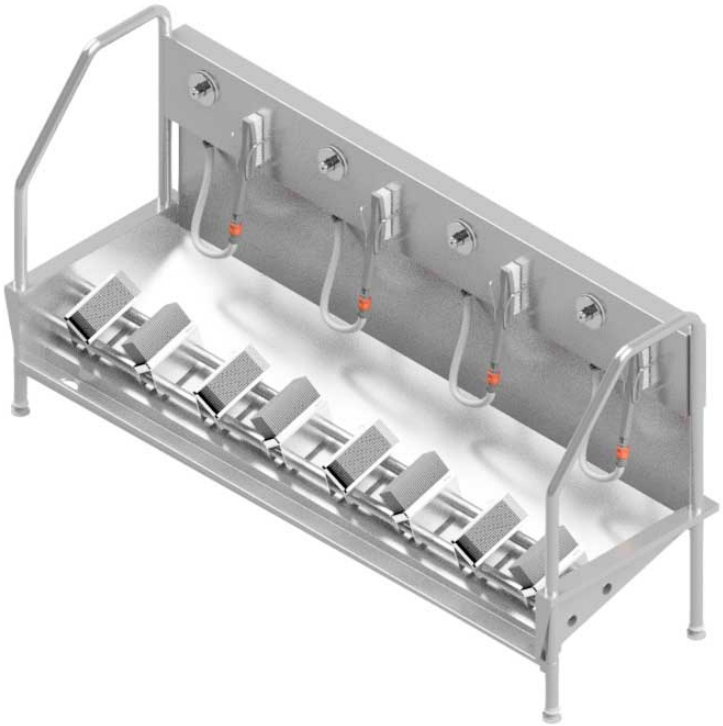

PRODUCT IMAGE · B65166(1P) shown for the 4-station layout. B65166(2P) uses sole-cleaning brushes only; both models include a hand-held brush. Refer to current specifications for mixer details.

E&OE. Specifications are subject to change without notice.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357