

PRODUCT RANGE SPECIFICATION

B66730 – Apron Wash Booth

DOCUMENT SCOPE
Product range

DOCUMENT REFERENCE
B66730{PSS}

DATA STATUS
Published catalogue data

GENERATED ON
14 Sep 2026

01 Product description and specification

Product description	Apron wash booth for washing work aprons within a dedicated cleaning station in food processing and production facilities. It is available in two standard height options: 2055 mm or 1700 mm, and measures 1024 mm long x 354 mm wide. The flat rear panel is fitted with three heavy-duty apron hooks compatible with all standard apron sizes, allowing for hands-free suspension during cleaning. Below, a forward-sloped trough—enclosed on both sides—funnels wastewater directly to a 40 mm right-hand outlet, ensuring effective drainage and minimizing splashback or mess. Cleaning is assisted by a hand-held scrubbing brush that emits an aerated water spray. The brush is connected via a heavy-duty hose to a ½” ball valve inlet for quick water control. The unit is mounted securely to the wall using pre-punched fixing holes and supported by a 40 × 40 mm stainless steel tubular leg frame with adjustable food-grade feet for levelling on uneven floors.
---------------------	--

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B66730. Apron Wash Booth. Height: 2055 mm, 1700 mm. It is available in two standard height options: 2055 mm or 1700 mm, and measures 1024 mm long x 354 mm wide. The unit is mounted securely to the wall using pre-punched fixing holes and supported by a 40 × 40 mm stainless steel tubular leg frame with adjustable food-grade feet for levelling on uneven floors.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B66730(112-1025-2055R)	B66730(112-1025-2055R) Apron Washing Station Single 1024mm L x 2055mm H Height: 2055.	Height: 2055 mm
B66730(112-1700x1025R)	Apron Wash Booth Single 1024mm (l) X 354mm (w) X 1700mm (h) Stainless Steel Grade 304	Height: 1700 mm

03 Application information


Intended applications	Hygienic Wash-Down & Cleaning
Industries	Food & Beverage Processing, Meat & Poultry Processing

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images




PRODUCT IMAGE

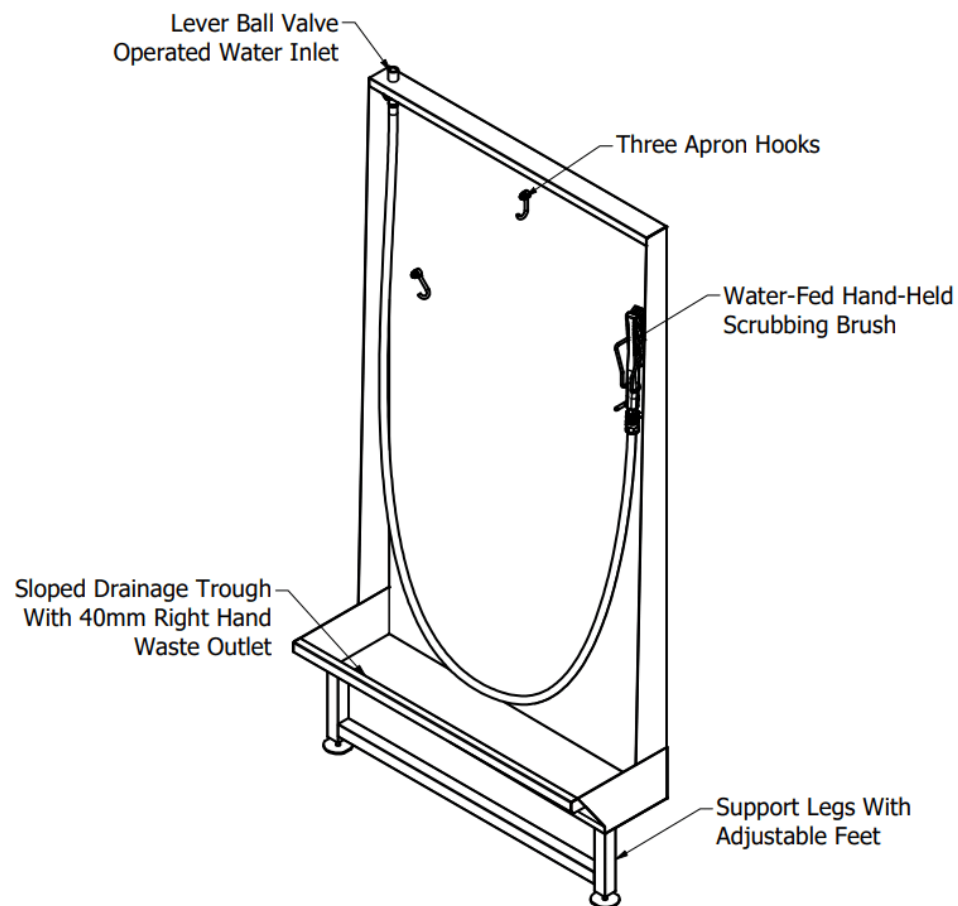


TOP RIGHT

PRODUCT IMAGE

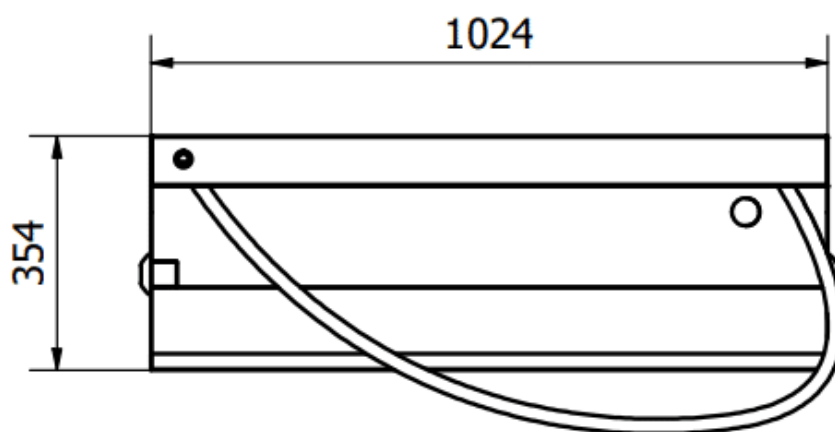

TOP

PRODUCT IMAGE

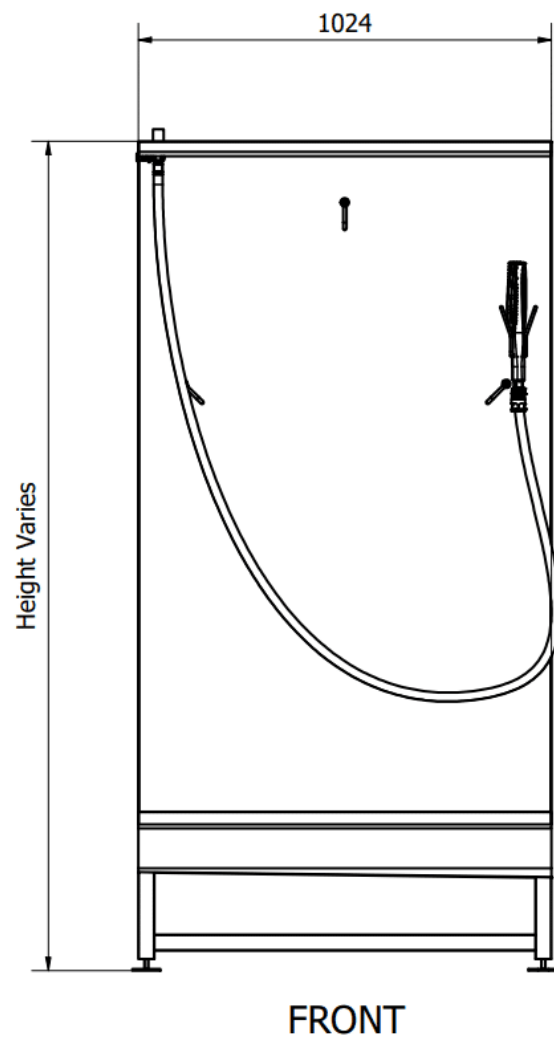

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.