MODEL SPECIFICATION

B75130(0750) – Grade 304 Shower Tray 750 x 750 x 100 mm



PRODUCT IMAGE · B75130(0750) Grade 304 shower tray

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Model	B75130(0750){PSS}	13 Nov 2026

01 Model specification

Shower Tray Stainless Steel Grade 304 750 mm (L) x 750 mm (W) x 100 mm (H) to B75130(750){PSS}, with a Pre-Punched 1 1/2-inch BSPT Waste Outlet Hole.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Length	750	mm	The length of the item typically as measured from left to right.
Width	750	mm	The width of the item typically as measured from front to back.
Height	100	mm	Overall vertical envelope, including the splashback where fitted. For tables and sinks, this is distinct from working height.
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Material Thickness	0.9	mm	The thickness of the material used for the item's primary construction. The thickness of individual components may vary.
Mounting Type	Recessed or frame-mounted	–	–

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

03 Dimensions and mass

PARAMETER	VALUE	UNIT
Length	750	mm
Width	750	mm
Overall height	100	mm

04 Model and supply data

Parent product	B75130 — Shower Trays Stainless Steel
Typical lead time	10–15 working days
Warranty	12 months

05 Specification notes

Configuration description

Shower Tray Stainless Steel Grade 304 750 mm (L) x 750 mm (W) x 100 mm (H) to B75130(750){PSS}, with a pre-punched 1 1/2-inch BSPT waste outlet hole.

This heavy-duty tray has a 40 mm apron and turned-down edge on all four sides for recessed or frame-mounted installation. It is suited to high-traffic hospitals, public ablutions, hostels and industrial facilities. The waste fitting is not included unless selected separately.

Short Form Specification

> **SPECIFICATION USE**
> Use this description when specifying this model.

B75130(750){PSS} shower tray; Grade 304 stainless steel; 750 x 750 x 100 mm; 0.9 mm material; 40 mm apron all round; recessed or frame-mounted; pre-punched 1 1/2-inch BSPT waste outlet hole.

Detailed specification

- Item code: B75130(0750)
- Drawing/specification reference: B75130(750){PSS}
- Product type: Heavy-duty shower tray
- Material: Grade 304 stainless steel
- Material thickness: 0.9 mm
- Overall dimensions: 750 mm (L) x 750 mm (W) x 100 mm (H)
- Apron: 40 mm on all four sides
- Edge detail: Turned down on all four sides
- Installation: Recessed or frame-mounted
- Waste outlet: Pre-punched 1 1/2-inch BSPT hole
- Waste fitting: Not included unless selected separately
- Waste-hole position: Centre line 165 mm from each of two adjacent edges, as shown on the supplied drawing
- Manufacture: Made in South Africa

06 Frequently asked questions

Which standard B75130 shower tray sizes are available?

The standard square sizes are 750 x 750 mm, 800 x 800 mm and 900 x 900 mm. Each tray is 100 mm high with a 40 mm apron all round.

What waste connection is provided?

The tray has a pre-punched 1 1/2-inch BSPT waste outlet hole. The waste fitting is not included unless it is selected separately.


How can the shower tray be installed?

The turned-down edges on all four sides allow the tray to be recessed into the floor or mounted on a suitable support frame.


Where is this shower tray typically used?

It is intended for high-traffic shower areas such as hospitals, public ablutions, hostels and industrial facilities.

Product drawings and images

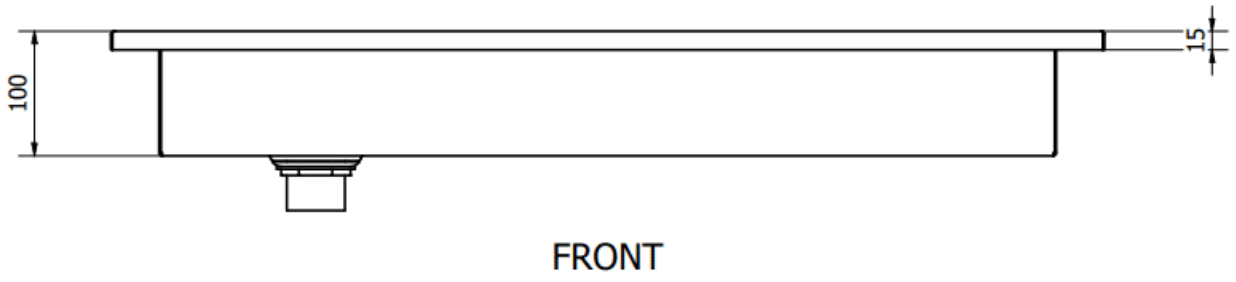

FRONT VIEW · B75130 technical drawing - front elevation

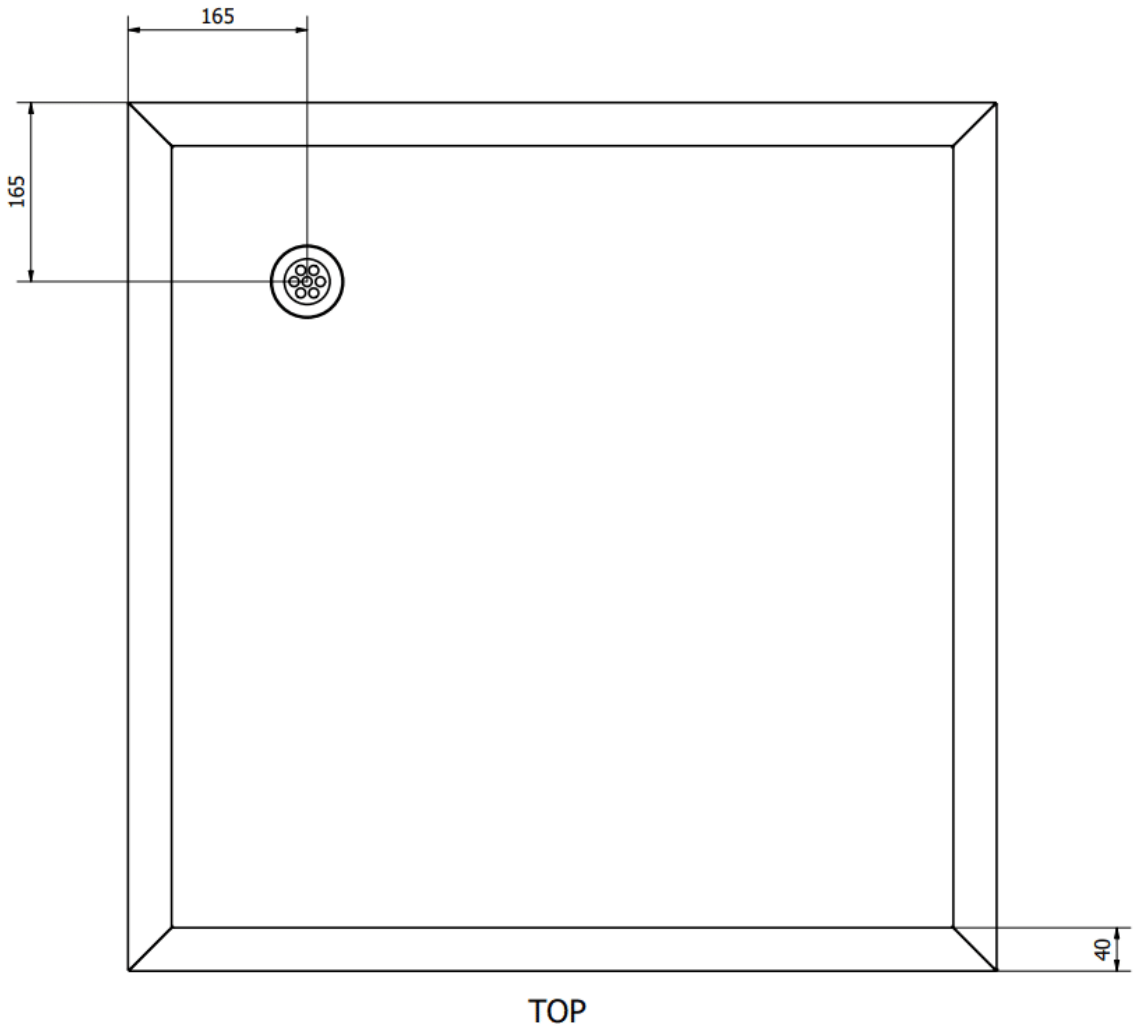

TOP VIEW · B75130 technical drawing - top view

E&OE. Specifications are subject to change without notice.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357