

PRODUCT RANGE SPECIFICATION

B80140(0300) – 300 mm Door Pull Handle

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B80140(0300){PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	---	---	-----------------------------

01 Product description and specification

Product description	300 mm door pull handle for commercial and institutional door installations. Precision-engineered for strength, durability, and hygiene, the B80140(0300) stainless steel pull handle is manufactured from Grade 304 stainless steel, providing excellent corrosion resistance and long-term performance in demanding environments. The handle is constructed from a 28 mm diameter round stainless steel tube, offering a comfortable and sturdy grip while maintaining a sleek, modern aesthetic. The overall handle length is 300 mm, making it suitable for a wide range of door sizes and applications, including commercial, institutional, and industrial settings. For secure and reliable mounting, the handle features two 75 mm diameter stainless steel mounting plates, each supplied with three 6 mm diameter pre-drilled fixing holes. This design ensures a stable and firm attachment to doors, gates, or panels, while maintaining ease of installation. The stainless steel surface is easy to clean and highly resistant to wear, making it an ideal choice for environments where hygiene, durability, and low maintenance are critical. Key Specifications: • Material: stainless steel Grade 304. • Handle Length: 300 mm. • Tube Diameter: 28 mm. • Mounting Plates: 75 mm diameter with three 6 mm pre-drilled holes each. • Surface Finish: Brushed or polished (specify if necessary). • Application: Suitable for internal and external doors in commercial, industrial, institutional, and hygienic environments.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B80140(0300). 300 mm Door Pull Handle. The overall handle length is 300 mm, making it suitable for a wide range of door sizes and applications, including commercial, institutional, and industrial settings. For secure and reliable mounting, the handle features two 75 mm diameter stainless steel mounting plates, each supplied with three 6 mm diameter pre-drilled fixing holes.

02 Models and configurations


MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B80140300	DOOR PULL HANDLE 300	Standard configuration

03 Application information

Intended applications	Restrooms & Ablutions
-----------------------	-----------------------

Industries	Government & Public Sector , Hospitals & Clinics
04 Supply and support	
Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

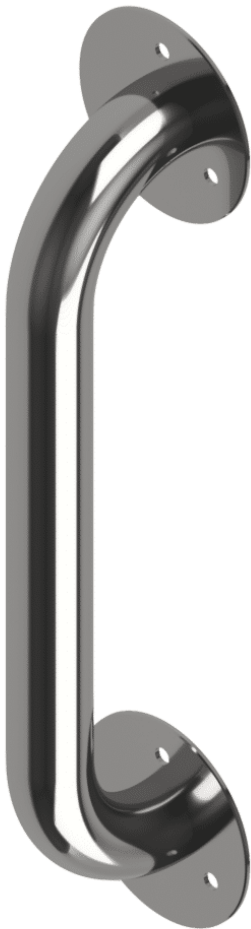

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.