

MODEL SPECIFICATION

E22126(SR-112-1200) – Preparation Sink Single Bowl Right Hand, Grade 304 Stainless Steel, 1.2 mm Thick. 1200 mm (L) x 650 mm (W), 900 mm Working Height and 1050 mm Overall Height Including the 150 mm Integral Rear Splashback. Bowl: 500 mm (L) x 500 mm (W) x 250 mm (D), with 40 mm Waste Outlet. Stainless Steel Legs with Adjustable Feet. No Undershelf. Height Specification: 900 mm Working Height, with a 150 mm Splashback (1050 mm Overall).



PRODUCT IMAGE · 1200 x 650 mm right-hand bowl preparation sink, without undershelf

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Model	E22126(SR-112-1200){PSS}	Published catalogue data	4 Oct 2026

01 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Working Height	900	mm	Floor to the tabletop or working surface; excludes any splashback.
Splashback Height	150	mm	Height of the splashback above the tabletop or working surface.
Overall height	1050	mm	Overall vertical envelope, including the splashback where fitted. For tables and sinks, this is distinct from working height.
Length	1200	mm	The length of the item typically as measured from left to right.
Width	650	mm	The width of the item typically as measured from front to back.
Material Thickness	1.2	mm	The thickness of the material used for the item's primary construction. The thickness of individual components may vary.

01 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Undershelf	No undershelf	—	Choose the undershelf or rack option for this sink. The available options specify the construction, material and thickness where applicable.
Material	Stainless Steel Grade 304	—	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Number of Bowls	1	—	—
Bowl Orientation	Right Hand	—	—
Bowl Length	500	mm	The length of the bowl typically as measured from left to right.
Bowl Width	500	mm	—
Bowl Depth	250	mm	—
Waste Outlet Diameter	40	mm	—
Adjustable Feet	Yes	—	—
Mounting Type	Stainless Steel Legs	—	—
Splashback Configuration	Integral Rear Splashback	—	—


02 Dimensions and mass

PARAMETER	VALUE	UNIT
Length	1200	mm
Width	650	mm
Overall height	1050	mm
Weight	29	kg


03 Model and supply data

Parent product	E22126(SR-112) — Preparation Sink with Single Right-Hand Bowl
Typical lead time	10–15 working days
Warranty	24 months

Configuration description	The E22126(SR-112-1200) preparation sink has a single right-hand bowl and a work surface to the left for preparation and washing tasks in commercial kitchens. The sink is manufactured from 1.2 mm Grade 304 stainless steel. It measures 1200 mm long x 650 mm wide. Working height to the worktop is 900 mm, with a 150 mm integral rear splashback bringing the overall height to 1050 mm. The bowl measures 500 mm long x 500 mm wide x 250 mm deep and has a 40 mm waste outlet. Stainless steel legs with adjustable feet allow the unit to be levelled during installation. This model is supplied without an undershelf.
Short Form Specification	SPECIFICATION USE Use this description when specifying this model. Shall be Basterfield E22126(SR-112-1200) single right-hand bowl preparation sink. Grade 304 stainless steel, 1.2 mm thick. 1200 mm (L) x 650 mm (W), 900 mm working height and 1050 mm overall height including the 150 mm integral rear splashback. Bowl: 500 mm (L) x 500 mm (W) x 250 mm (D), with 40 mm waste outlet. Stainless steel legs with adjustable feet. No undershelf.
Detailed specification	• Model: E22126(SR-112-1200) • Material: Grade 304 stainless steel • Material thickness: 1.2 mm • Length: 1200 mm • Width: 650 mm • Working height to worktop: 900 mm • Overall height including splashback: 1050 mm • Integral rear splashback height: 150 mm • Bowl: Single, right-hand • Bowl dimensions: 500 mm (L) x 500 mm (W) x 250 mm (D) • Waste outlet diameter: 40 mm • Supports: Stainless steel legs with adjustable feet • Undershelf: Not included

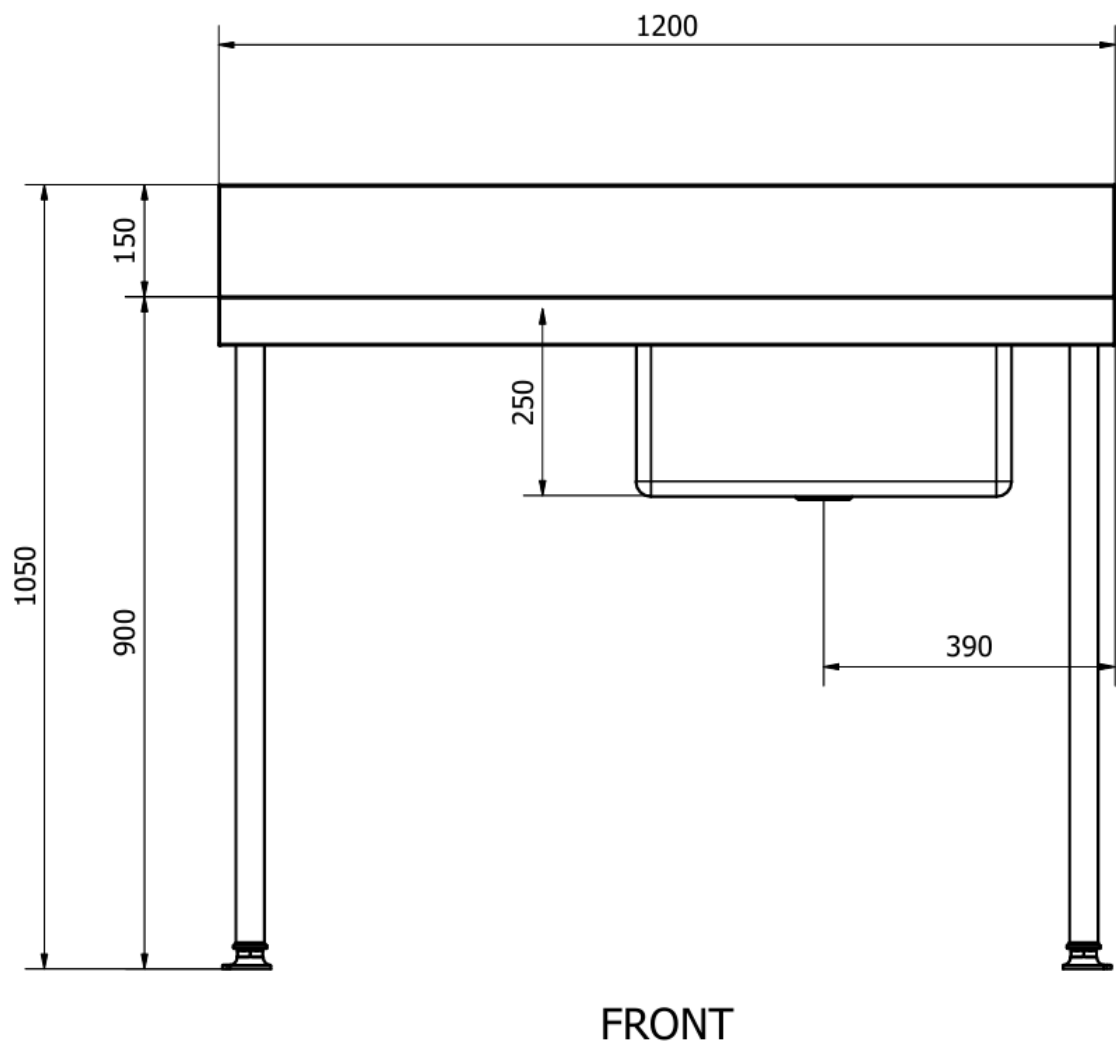

FRONT VIEW · 1200 mm model: 900 mm working height and 1050 mm overall height

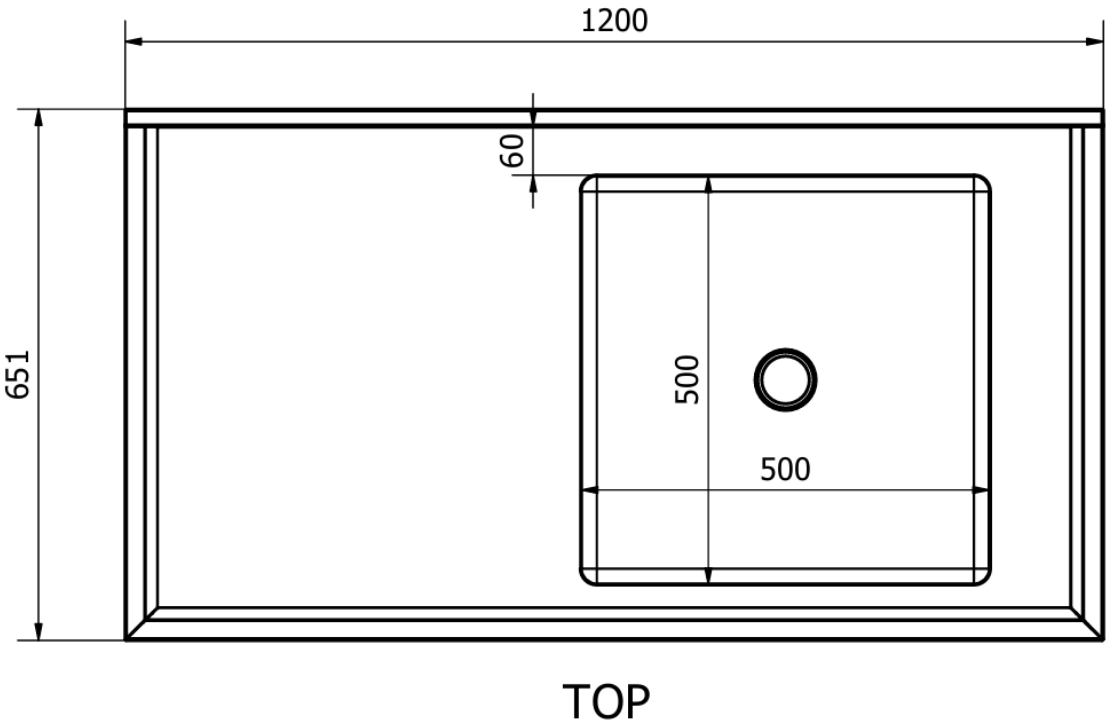

TOP VIEW · Top view: source drawing labels the width 651 mm; specified catalogue width is 650 mm

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.