

PRODUCT RANGE SPECIFICATION

E22128(SR-112) – Grade 304 Single Bowl Right-Hand Pot Sink

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE E22128(SR-112){PSS}	DATA STATUS Published catalogue data	GENERATED ON 19 Sep 2026
---------------------------------	---	---	-----------------------------

01 Product description and specification

Product description	Pot sink with a single right-hand bowl for washing cookware in commercial and institutional kitchens. With a right-hand positioned deep bowl (500 mm width x 600 mm length x 300 mm depth), this sink is suited to washing large cookware, including oversized pots and pans, ensuring efficient workflow in food preparation and catering facilities. Superior stainless steel Construction • A full stainless steel frame with reinforced legs and support structure provides long-lasting stability and strength. Optimized for Commercial Use • 150 mm rear splashback minimizes water splashes, helping maintain a clean and sanitary workspace. • Integrated 40 mm waste outlet for smooth and efficient drainage. • Adjustable stainless steel feet allow the unit to be leveled on uneven flooring. Size Options & Customization • Standard length: 1600 mm (custom sizes available upon request). • Standard width: 650 mm (alternative options: 600 mm or 700 mm). • Tabletop height: 900 mm (1050 mm including splashback). Designed for professional use, this right-hand bowl pot sink is part of a range that includes left-hand and center bowl configurations, catering to different workspace layouts. Require a Custom Size? Working height is measured from the floor to the worktop. Overall height includes the splashback and is calculated from the selected working and splashback heights.
---------------------	---

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield E22128(SR-112). Pot Sink Single Right Hand Bowl. Length: 1200 mm, 1600 mm. 150 mm rear splashback minimizes water splashes, helping maintain a clean and sanitary workspace. Integrated 40 mm waste outlet for smooth and efficient drainage.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Working Height	900	mm	Floor to the tabletop or working surface; excludes any splashback.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Splashback Height	150	mm	Height of the splashback above the tabletop or working surface.
Overall height	1050	mm	Overall vertical envelope, including the splashback where fitted. For tables and sinks, this is distinct from working height.
Bowl Length	600	mm	The length of the bowl typically as measured from left to right.
Bowl Width	500	mm	—
Bowl Depth	300	mm	—

03 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
E22128(SR-112-1200)	Height specification: 900 mm working height, with a 150 mm splashback (1050 mm overall).	Length: 1200 mm Overall dimensions: — × — × 1050 mm (L × W × H)
E22128(SR-112-1600)	Height specification: 900 mm working height, with a 150 mm splashback (1050 mm overall).	Length: 1600 mm Overall dimensions: — × — × 1050 mm (L × W × H)

04 Functional features

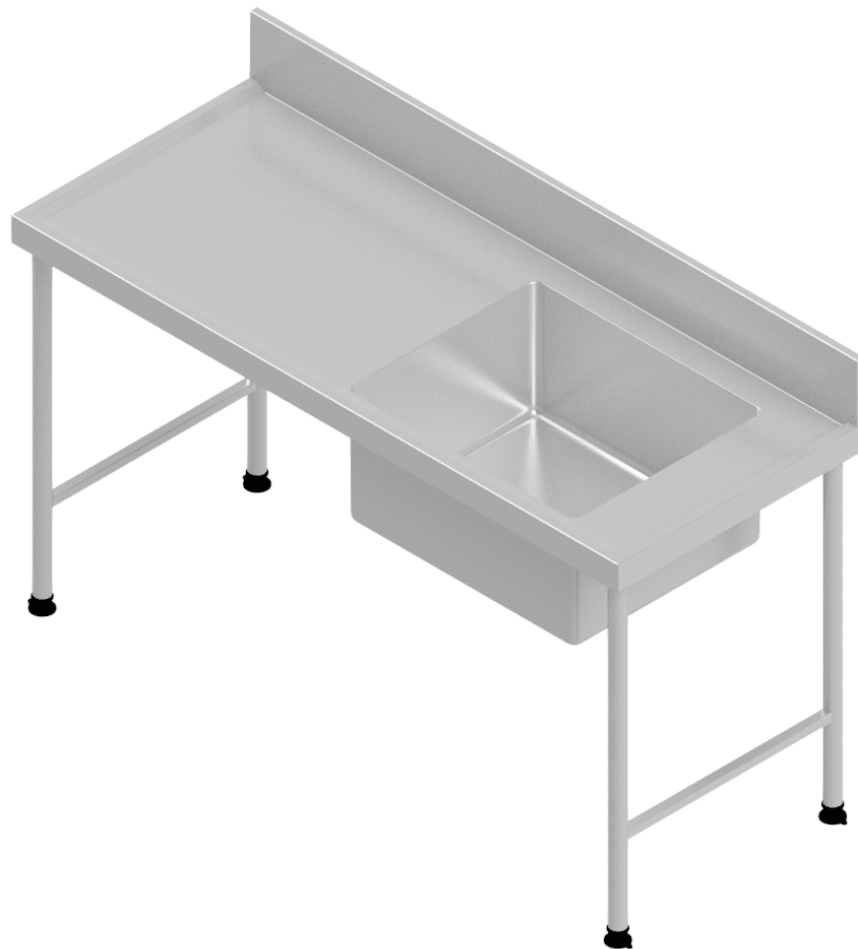
01	Hygienic stainless steel construction Smooth, non-porous surfaces are easy to clean and suitable for commercial hygiene environments.
02	Designed for commercial environments Built for repeated daily use rather than light domestic applications.
03	Stainless Steel Grade 304 construction, including framework Provides excellent corrosion resistance, durability and hygiene in normal commercial kitchen and food-service environments.
04	Heavy-duty fabricated construction Provides greater rigidity and durability under demanding commercial use.
05	Deep pot-washing bowl Provides the capacity required to wash large pots, pans, containers and utensils that cannot be accommodated in conventional sink bowls.

05 Application information

Intended applications	Pot Washing
Industries	Hotels & Lodges, Institutional & Contract Catering, Restaurants & Cafés

06 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

PRODUCT IMAGE



PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.