PRODUCT RANGE SPECIFICATION

E25145(112) – Grade 304 Heavy Duty Preparation Table



PRODUCT IMAGE · Rendered E25145(112-1800x0600), 1800 x 600 x 900 mm, with no undershelf and no splashback.

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	**E25145(112){PSS}**	**23 Nov 2026**

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/e25145112-grade-304-heavy-duty-preparation-table#specifications

01 Product description and specification

Product description

Grade 304 table with a 1.2 mm worktop, adjustable feet and a choice of no undershelf, solid, slatted, perforated or tubular undershelf.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield E25145(112). The standard worktop is 1.2 mm thick and the standard working height is 900 mm. This table has no splashback. Working height is measured from the floor to the worktop and equals overall height. Choose no undershelf, or a solid, slatted, perforated or tubular undershelf. Solid undershelves are available in Grade 304 or Grade 430 stainless steel, 0.9 mm or 1.2 mm thick. Slatted, perforated and tubular undershelves are available in Grade 304 or Grade 430, 1.2 mm thick. The tubular design uses formed open-section sheet metal. Available sizes depend on the selected configuration. Confirm the selected configuration's dimensions, undershelf material, thickness and mass on its item specification sheet.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Product Range	Heavy Duty	–	–
Splashback Configuration	None	–	–

03 Configuration options

Length 17 choices, from 500 mm to 2400 mm

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

Width	600 mm; 650 mm; 700 mm
Undershelf specification	No undershelf; Perforated Grade 304 1.2 mm; Perforated Grade 430 1.2 mm; Slatted Grade 304 1.2 mm; Slatted Grade 430 1.2 mm; Solid Grade 304 0.9 mm; Solid Grade 304 1.2 mm; Solid Grade 430 0.9 mm; + 3 more
Worktop thickness	1.2 mm

Options vary by model; not every combination is available. Use the product page to select a model.

04 Functional features

01 Grade 304 stainless steel worktop and frame

The Grade 304 worktop is 1.2 mm thick. Standard working height is 900 mm; advanced working heights are 850 mm and 1000 mm.

02 No timber or galvanised backing beneath the worktop

Stainless steel support beneath the worktop.

03 Adjustable stainless steel feet

Adjustable stainless steel feet allow accurate levelling.

04 Choice of undershelf configuration

Choose no undershelf, or a solid, slatted, perforated or tubular undershelf. Solid undershelves are available in Grade 304 or Grade 430 stainless steel, 0.9 mm or 1.2 mm thick. Slatted, perforated and tubular undershelves are available in Grade 304 or Grade 430, 1.2 mm thick. The tubular design uses formed open-section sheet metal. Available sizes depend on the selected configuration.

05 Choice of table sizes

Lengths: 500, 900, 1000, 1100, 1200, 1300, 1400, 1500, 1600, 1700, 1800, 1900, 2000, 2100, 2200, 2300, 2400 mm. Widths: 600, 650, 700, 750 mm. Available combinations vary by undershelf and worktop specification; select the required options in the configurator.

05 Application information

Intended applications	Food Preparation Workstations, Healthcare Utility Rooms, Laboratory Work Areas, Pharmaceutical Support Areas, Slaughter & Abattoir Operations
Industries	Cannabis, Clinical Laboratories, Hospitals & Clinics, Hotels & Lodges, Institutional & Contract Catering, Meat & Poultry Processing, Pharmaceutical Manufacturing, Restaurants & Cafés

06 Supply and support

Typical lead time	10–15 working days
Warranty	24 months

07 Frequently asked questions

What is the standard configuration?

The standard worktop is 1.2 mm thick and the standard working height is 900 mm.

Which undershelf options are available?

Choose no undershelf, or a solid, slatted, perforated or tubular undershelf. Solid undershelves are available in Grade 304 or Grade 430 stainless steel, 0.9 mm or 1.2 mm thick. Slatted, perforated and tubular undershelves are available in Grade 304 or Grade 430, 1.2 mm thick. The tubular design uses formed open-section sheet metal. Available sizes depend on the selected configuration.

Which sizes are available?

Lengths: 500, 900, 1000, 1100, 1200, 1300, 1400, 1500, 1600, 1700, 1800, 1900, 2000, 2100, 2200, 2300, 2400 mm. Widths: 600, 650, 700, 750 mm. Available combinations vary by undershelf and worktop specification; select the required options in the configurator.

Which advanced options are available?

Advanced working heights are 850 mm and 1000 mm. This range has a fixed 1.2 mm Grade 304 worktop. Use E25145(115) for 1.5 mm worktops and E25145(120) for 2 mm worktops.

How is the height measured?

This table has no splashback. Working height is measured from the floor to the worktop and equals overall height.

Can I choose another stainless steel grade?

The worktop and table range remain Grade 304; the selected undershelf specification is shown separately. Whole-table Grade 304, Grade 430 and Grade 316 tables remain separate product alternatives. Grade 316 tables are outside the Eco range.

What supports the worktop?

A stainless steel sub-frame supports the worktop, with no timber or galvanised backing beneath it.

Product drawings and images



PRODUCT IMAGE



PRODUCT IMAGE



PRODUCT IMAGE

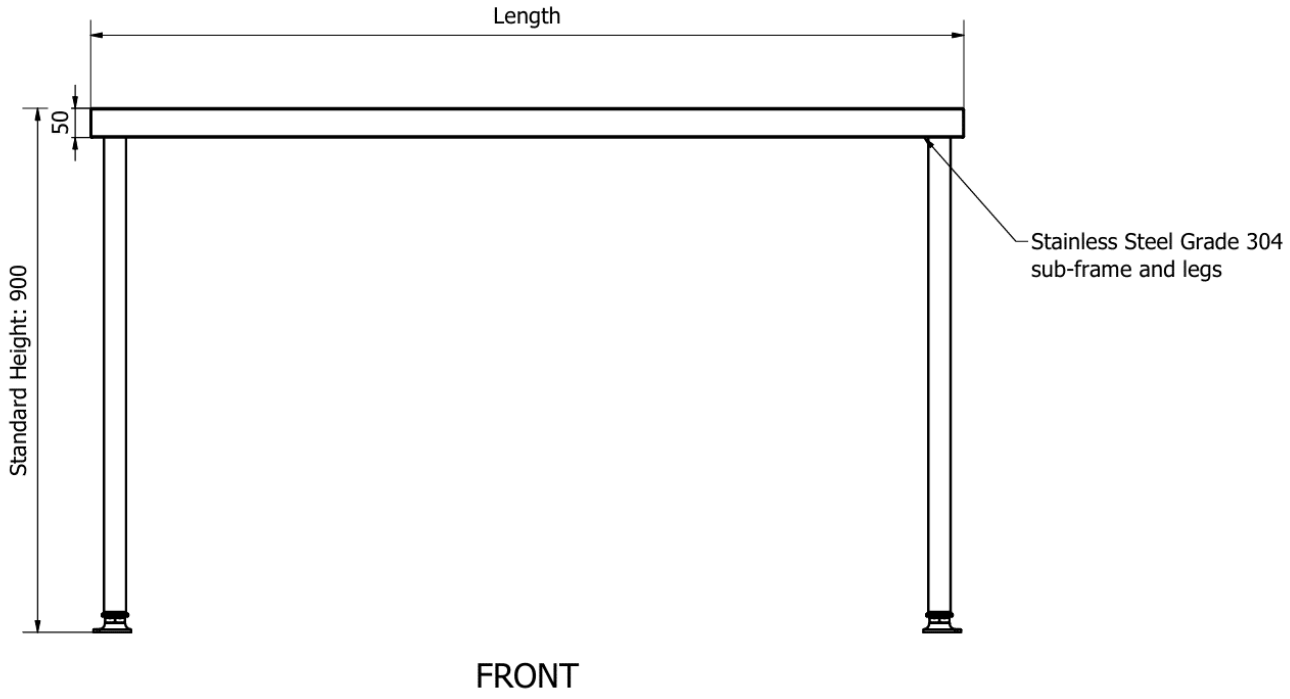

PRODUCT IMAGE

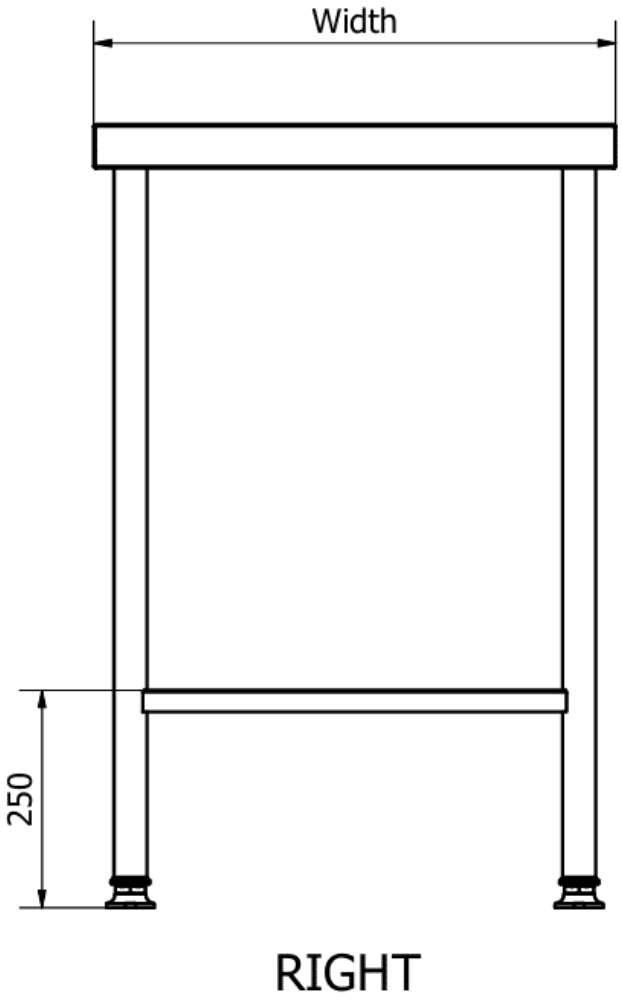

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.