MODEL SPECIFICATION

# E25160(112-1800x0600) – Preparation Table Recessed 1800mm (L) x 600mm (W)

| DOCUMENT SCOPE | DOCUMENT REFERENCE | DATA STATUS | GENERATED ON |
|---|---|---|---|
| Model | E25160(112-1800x0600){PSS} | Published catalogue data | 5 Nov 2026 |

## 01 Model specification

Recessed Top Preparation Table Stainless Steel Grade 304 Heavy Duty 1.2mm Thickness 1800mm (L) x 600mm (W) x 900mm (H) with 30mm Recess, Marine Edge, Stainless Steel Framework and Adjustable Feet

The 900mm overall height is measured to the top of the marine edge; the recessed work surface is 870mm high. Supplied with full stainless steel underframework, cross bracing, Ø38.1mm tubular legs and black plastic adjustable feet for levelling. The top has no fall or drainage outlet.

## 02 Technical specifications

| PARAMETER | VALUE | UNIT | TECHNICAL NOTE |
|---|---|---|---|
| Working Height | 870 | mm | Height of the recessed working surface: 900mm overall height less the 30mm recess. |
| Overall height | 900 | mm | Overall height measured to the top of the marine edge. |
| Length | 1800 | mm | The length of the item typically as measured from left to right. |
| Width | 600 | mm | The width of the item typically as measured from front to back. |
| Material | Stainless Steel Grade 304 | – | The worktop is Grade 304 stainless steel. |
| Material Thickness | 1.2 | mm | Thickness of the stainless steel worktop. |
| Product Range | Heavy Duty | – | – |
| Recessed Slab Depth | 30 | mm | Vertical depth from the top of the marine edge to the recessed working surface. |
| Slab Edge | Marine Edge | – | Marine edge surrounding the recessed working surface. |
| Framework Material | Stainless Steel | – | Full stainless steel underframework. |
| Cross Bracing | Yes | – | The stainless steel underframework includes cross bracing. |


121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

## 02 Technical specifications

| PARAMETER | VALUE | UNIT | TECHNICAL NOTE |
|---|---|---|---|
| **Leg Profile** | Round Tubular | — | Round tubular stainless steel legs. |
| **Leg Diameter** | 38.1 | mm | Outside diameter of the tubular stainless steel legs. |
| **Feet Material** | Black Plastic | — | Black plastic adjustable feet for levelling. |
| **Adjustable Feet** | Yes | — | Adjustable feet allow the table to be levelled. |
| **Drainage** | No Fall or Drainage Outlet | — | The top has no fall and no drainage outlet. Liquids must be removed separately. |

## 03 Dimensions and mass

| PARAMETER | VALUE | UNIT |
|---|---|---|
| **Length** | 1800 | mm |
| **Width** | 600 | mm |
| **Overall height** | 900 | mm |

## 04 Model and supply data

| | |
|---|---|
| **Parent product** | E25160(112) — Heavy Duty Marine Edge Recessed Preparation Table |
| **Typical lead time** | 10–15 working days |
| **Warranty** | 24 months |

## 05 Specification notes

**Configuration description**

This heavy duty recessed top preparation table measures 1800mm long x 600mm wide x 900mm overall height to the marine edge. This heavy duty recessed top preparation table provides a contained work area for dry goods sorting and food preparation. The Grade 304 stainless steel top is 1.2mm thick and has a 30mm recess with a marine edge.

The full stainless steel underframework includes cross bracing and round tubular legs with a Ø38.1mm outside diameter. Black plastic adjustable feet provide levelling. Overall height is 900mm to the top of the marine edge, with the recessed working surface at 870mm.

The top has no fall or drainage outlet. Wet food-production applications require liquids to be removed separately.

Choose standard lengths of 1200, 1500, 1800, 2000 or 2400mm and widths of 600, 650 or 700mm. A 750mm width is custom; the initial custom configuration is 2000mm long x 750mm wide.

**Short Form Specification**

**SPECIFICATION USE**
Use this description when specifying this model.

Recessed Top Preparation Table Stainless Steel Grade 304 Heavy Duty 1.2mm Thickness 1800mm (L) x 600mm (W) x 900mm (H) with 30mm Recess, Marine Edge, Stainless Steel Framework and Adjustable Feet

**Detailed specification**

- Worktop: Stainless Steel Grade 304
- Construction: Heavy Duty
- Worktop thickness: 1.2mm
- Length: 1800mm
- Width: 600mm
- Overall height to top of marine edge: 900mm
- Recessed working surface height: 870mm
- Recess depth: 30mm
- Edge: Marine Edge
- Underframework: Full Stainless Steel
- Cross bracing: Included
- Legs: Round Tubular, Ø38.1mm Outside Diameter
- Feet: Black Plastic, Adjustable for Levelling
- Fall: None
- Drainage outlet: None

## 06 Frequently asked questions

**What is the difference between this table and the E25145 flat table?**

E25160 has a top recessed by 30mm with a marine edge. Its construction includes a 1.2mm Grade 304 stainless steel worktop, full stainless steel underframework, cross bracing, Ø38.1mm tubular legs and black plastic adjustable feet. The recess sides slope down at 60° to the horizontal, as shown by the marine-edge profile.

**Can it be used for wet food-production applications?**

It may be used where the process allows liquids to be removed separately. The top has no fall and no drainage outlet, so it does not drain automatically.

**Where is the 900mm height measured?**

The 900mm overall height is measured to the top of the marine edge. The recessed work surface is 870mm above floor level.

**Which standard sizes are available?**

Standard lengths are 1200, 1500, 1800, 2000 and 2400mm, each with a choice of 600, 650 or 700mm width. Overall height is 900mm.


**Is a 750mm width available?**

Yes. A 750mm width is custom rather than a standard configurator option. The initial custom item measures 2000mm (L) x 750mm (W) x 900mm (H).


**What are the feet and support frame made from?**

The underframework and tubular legs are stainless steel. The adjustable levelling feet are black plastic, and the frame includes cross bracing.


## Product drawings and images

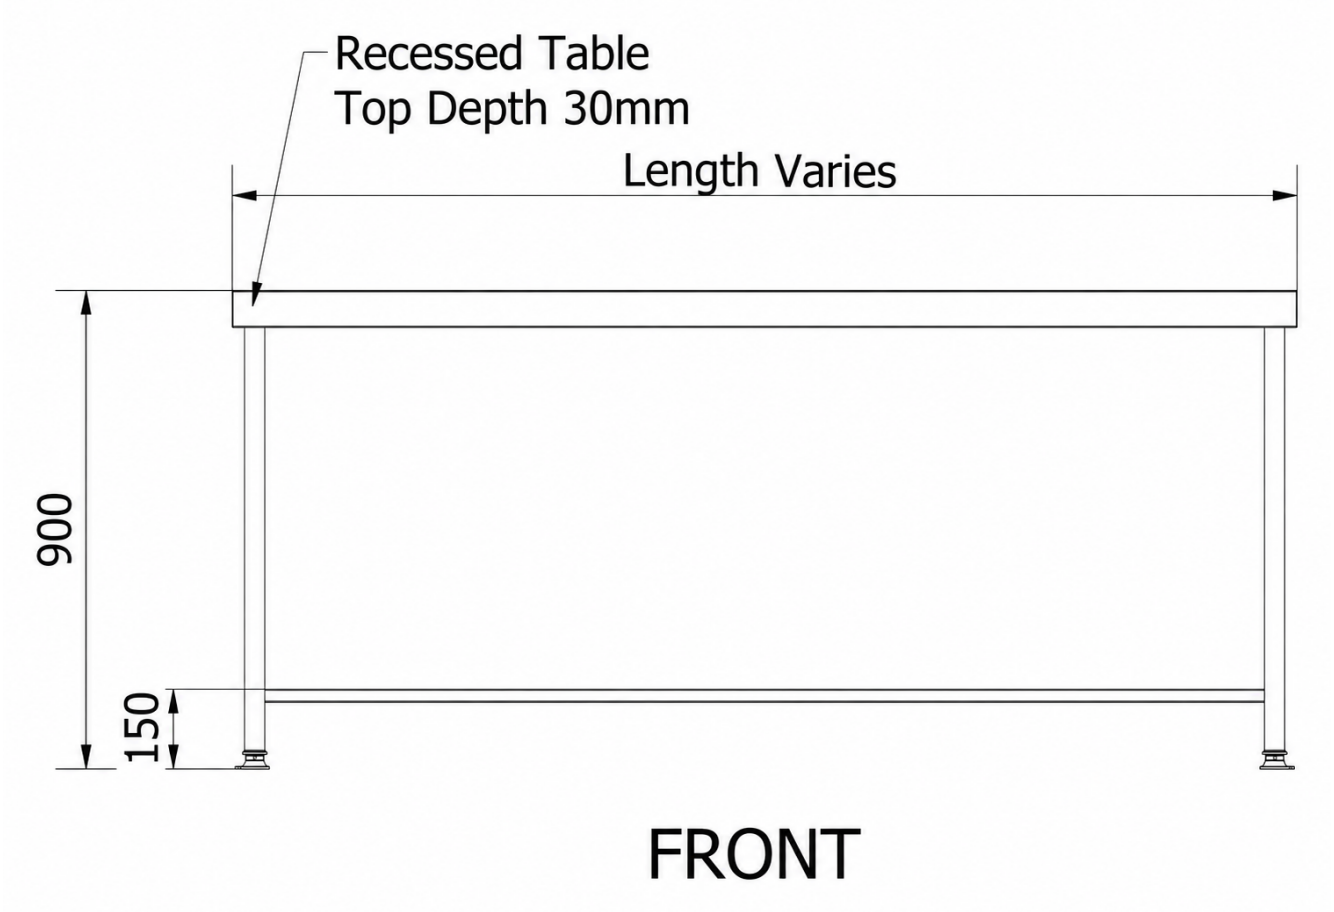



**FRONT VIEW** · Range front view. Length varies by configuration. Fixed dimensions are in millimetres.

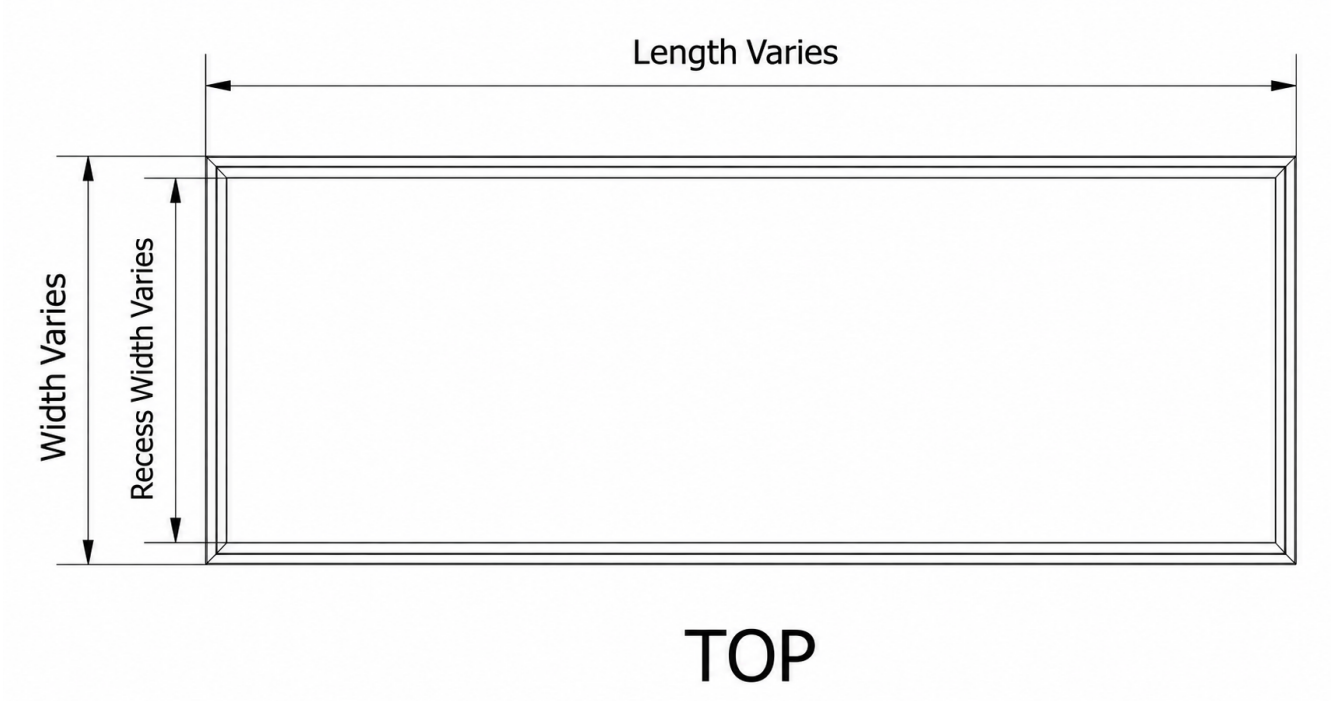


**TOP VIEW** · Range top view. Length, overall width and recess width vary by configuration.

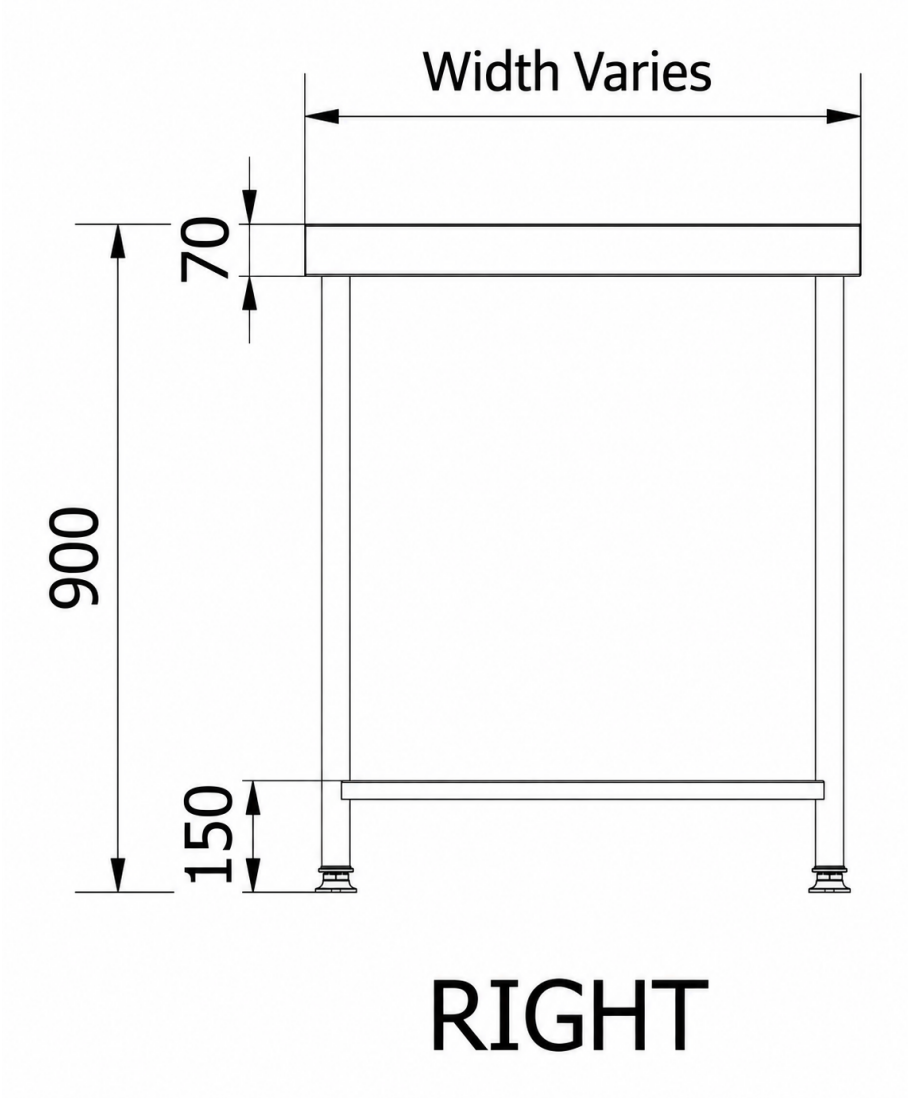



**RIGHT VIEW** · Range right view. Width varies by configuration. Fixed dimensions are in millimetres.

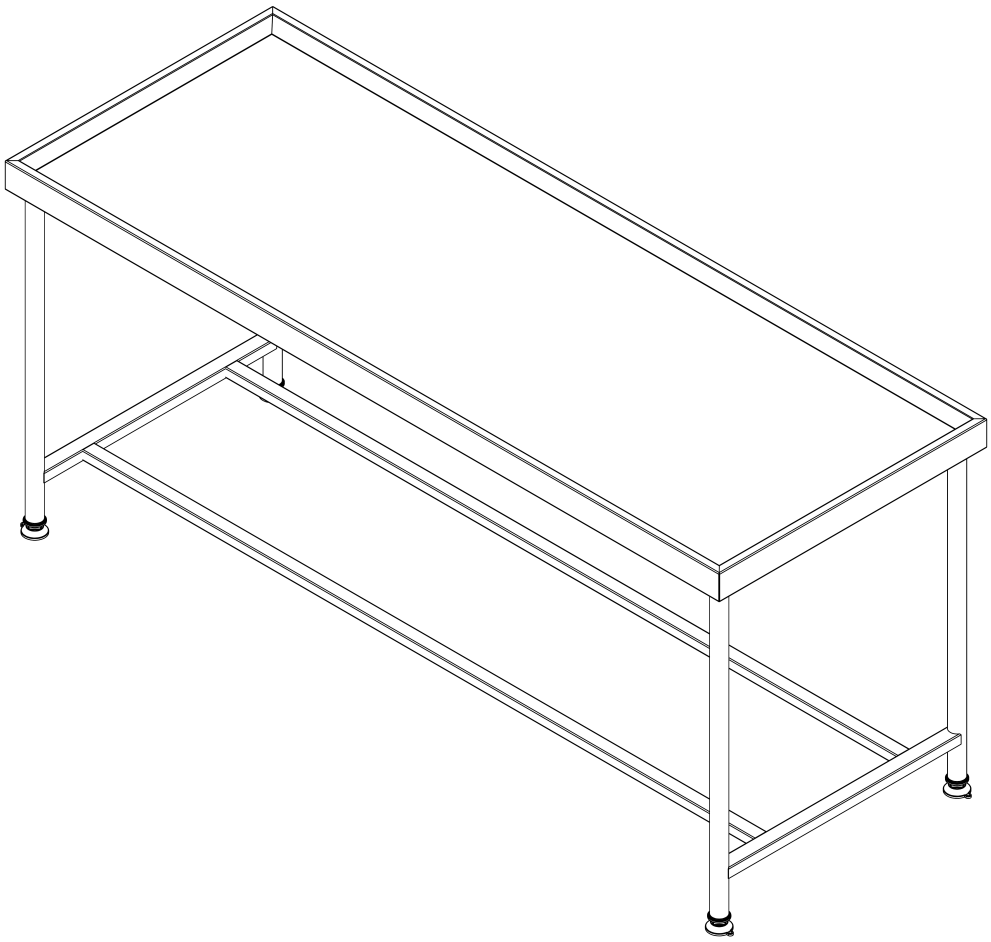

# TOP RIGHT

**ISOMETRIC VIEW** · Representative marine-edge recessed preparation table. Length and width vary by configuration.

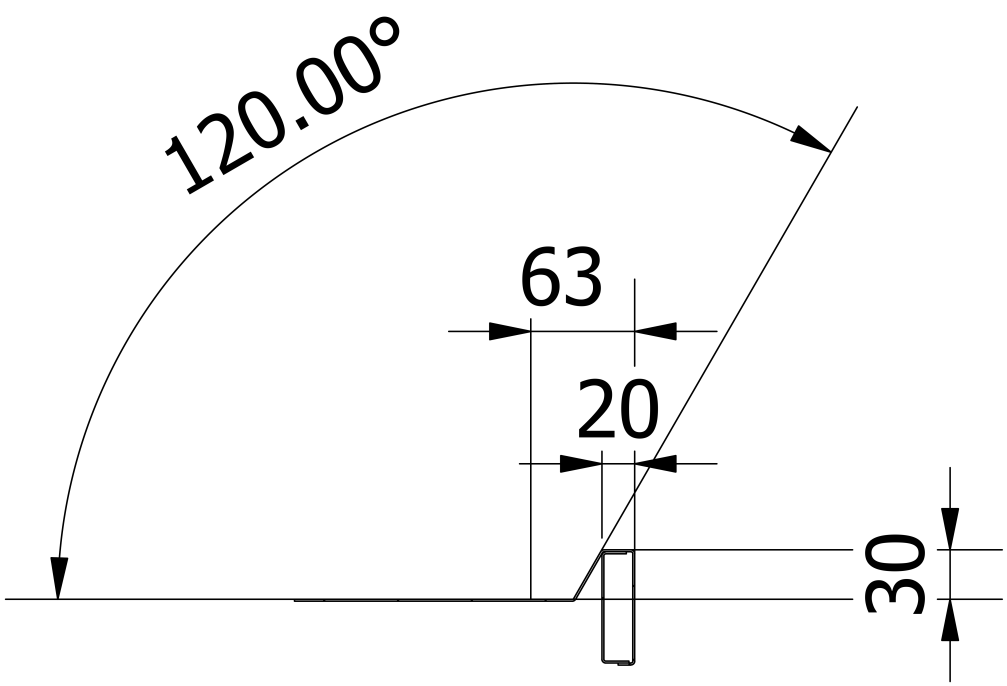


# Edge Profile

**DETAIL VIEW** · Marine-edge profile detail. Fixed profile dimensions are in millimetres.

**VERIFICATION REQUIRED** Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.