MODEL SPECIFICATION

E27292(1T-1200x0750) – Pot Drying Rack 1 Tier 1200mm (L) x 750mm (W)



PRODUCT IMAGE · Heavy duty Grade 304 stainless steel pot drying rack with tubular drying surface, cross-braced frame and stainless steel adjustable feet. 1200mm x 750mm model shown.

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Model	E27292(1T-1200x0750){PSS}	Published catalogue data	3 Nov 2026

01 Model specification

Pot Drying Rack, Stainless Steel Grade 304, 1200mm (L) x 750mm (W) x 900mm (H), with Single Tier, 40mm × 40mm Square Tubular Framework, Cross Bracing at 250mm Above Floor, Ø28mm Round Tube Cross Members and Stainless Steel Adjustable Feet

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Working Height	900	mm	Height above the floor to the top drying rack.
Overall height	900	mm	Overall rack height, measured from the floor to the top drying rack.
Material	Stainless Steel Grade 304	–	Grade 304 stainless steel framework and round tube cross members.
Mounting Type	Free Standing	–	Freestanding rack supported by its tubular frame and adjustable feet.
Adjustable Feet	Yes	–	Stainless steel adjustable feet for levelling the rack during installation.
Cross Bracing	Yes	–	Cross bracing is positioned 250mm above the floor.
Framework Material	Stainless Steel Grade 304	–	Grade 304 stainless steel framework and round tube cross members.
Framework Profile	40 × 40mm Square Tubular Framework	–	40 × 40mm square tubular Grade 304 stainless steel framework.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Feet Material	Stainless Steel	—	The adjustable feet are stainless steel.
Construction	Heavy Duty Cross-Braced Tubular Construction	—	Single drying rack with cross bracing 250mm above the floor.
Cross Member Diameter	28	mm	Ø28mm round tube cross members form the drying surface.
Length	1200	mm	Overall rack length. Available lengths: 1000mm, 1200mm, 1500mm or 2000mm.
Width	750	mm	Overall rack width. Standard width is 650mm; 700mm and 750mm variants are also available.
Cross Member Pitch	90	mm	Centre-to-centre pitch of the cross members for this model.
Cross Member Count	9	—	Number of round tubular cross members fitted to this model.
Shelf Tiers	1	—	Number of drying racks fitted to the frame.
Cross Bracing Height	250	mm	Height above the finished floor.

03 Dimensions and mass

PARAMETER	VALUE	UNIT
Length	1200	mm
Width	750	mm
Overall height	900	mm
Weight	25	kg

04 Model and supply data

Parent product	E27292(1T) — Heavy Duty Single Tier Pot Drying Rack
Typical lead time	10–15 working days
Warranty	24 months

05 Specification notes

Configuration description

Heavy duty single tier Grade 304 stainless steel pot drying rack, 1200mm long and 750mm wide. The top drying rack is 900mm above the floor, with cross bracing at 250mm above the floor. The 40 × 40mm square tubular framework supports open drying surfaces formed by Ø28mm round tube cross members. Stainless steel adjustable feet allow levelling during installation. Suitable for supporting washed pots and utensils for drip drying.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this model.

Grade 304 stainless steel single tier pot drying rack, 1200mm (L) × 750mm (W) × 900mm (H). The top drying rack is 900mm above the floor, with cross bracing at 250mm above the floor. 40 × 40mm square tubular frame, Ø28mm round tube cross members and stainless steel adjustable feet.

Detailed specification

- Model: E27292(1T-1200x0750)
- Drying Tiers: 1
- Overall Dimensions: 1200mm (L) × 750mm (W) × 900mm (H)
- Top Rack Height Above Floor: 900mm
- Cross Bracing Height Above Floor: 250mm
- Cross Bracing: Included
- Material: Stainless Steel Grade 304
- Framework: 40 × 40mm Square Tubular Grade 304 Stainless Steel
- Cross Members: Ø28mm Round Tube
- Feet: Stainless Steel Adjustable Feet
- Mounting: Freestanding
- Intended Use: Supporting Washed Pots and Suitable Utensils for Drip Drying

06 Frequently asked questions

What is the pot drying rack used for?

It provides a place for washed pots, utensils and other suitable items to drip dry after washing in commercial kitchens, sculleries and food preparation areas.

Which sizes are available?

There are twelve standard combinations: 1000mm, 1200mm, 1500mm and 2000mm lengths, each available in 650mm, 700mm or 750mm width. The top drying rack is 900mm above the floor on every model.

Which width is standard?

650mm is the standard width. Wider 700mm and 750mm variants are available at every listed length.

How is the frame constructed?

The rack has 40 × 40mm square tubular Grade 304 stainless steel framework, Ø28mm round tube cross members and stainless steel adjustable feet. The top drying rack is 900mm above the floor, with cross bracing at 250mm above the floor.

What stainless steel grade is used?

The framework and round tube cross members are manufactured from Grade 304 stainless steel. The adjustable feet are stainless steel.

Can the rack be levelled?

Yes. Stainless steel adjustable feet allow levelling during installation.


How should I choose a rack size?

Check the available floor space and the footprint of the items to be dried. Choose a length and width that support the items securely across the tubular drying surface.


What are the rack and support heights?

The top drying rack is 900mm above the floor, with cross bracing at 250mm above the floor.


Product drawings and images

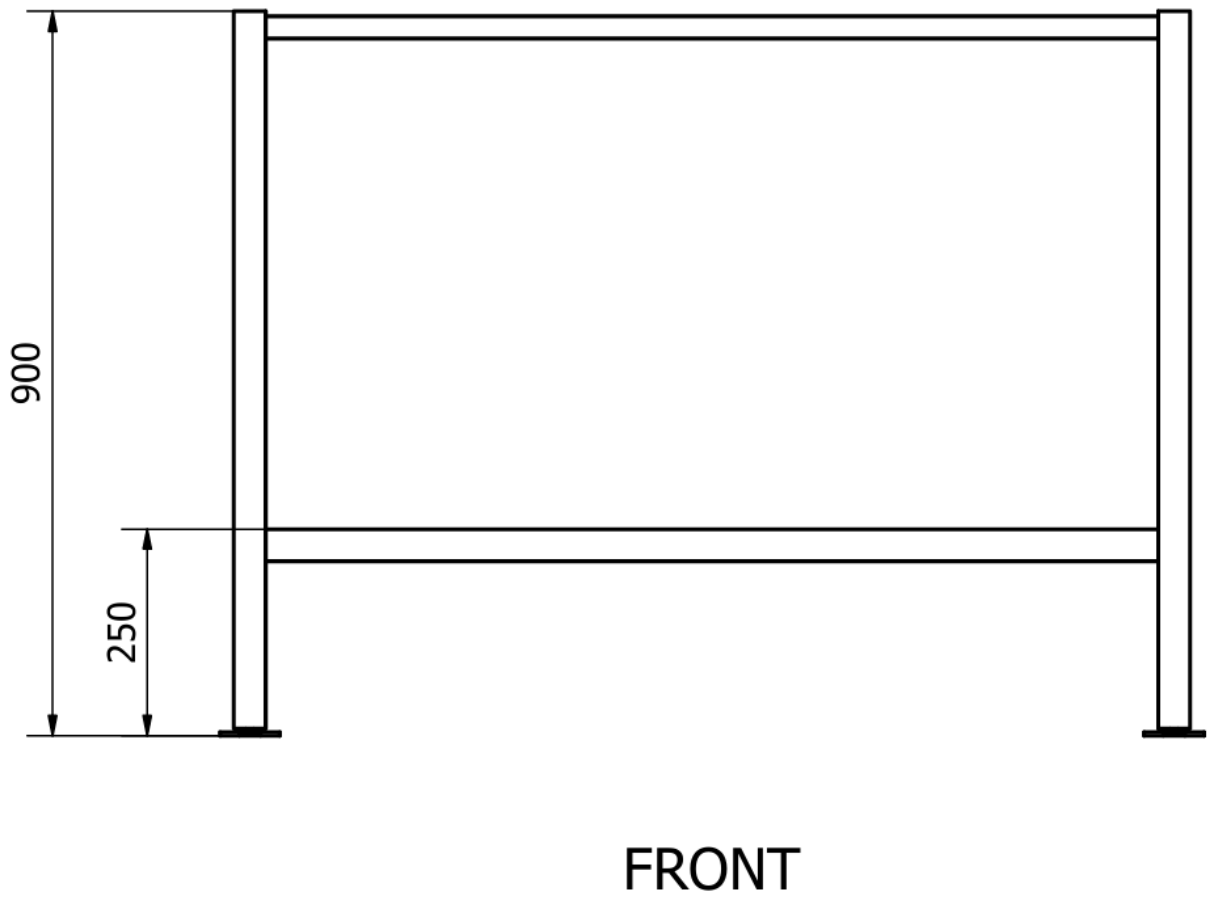


FRONT VIEW · Front view of the 1200mm x 750mm pot drying rack; overall height 900mm. Dimensions in millimetres.

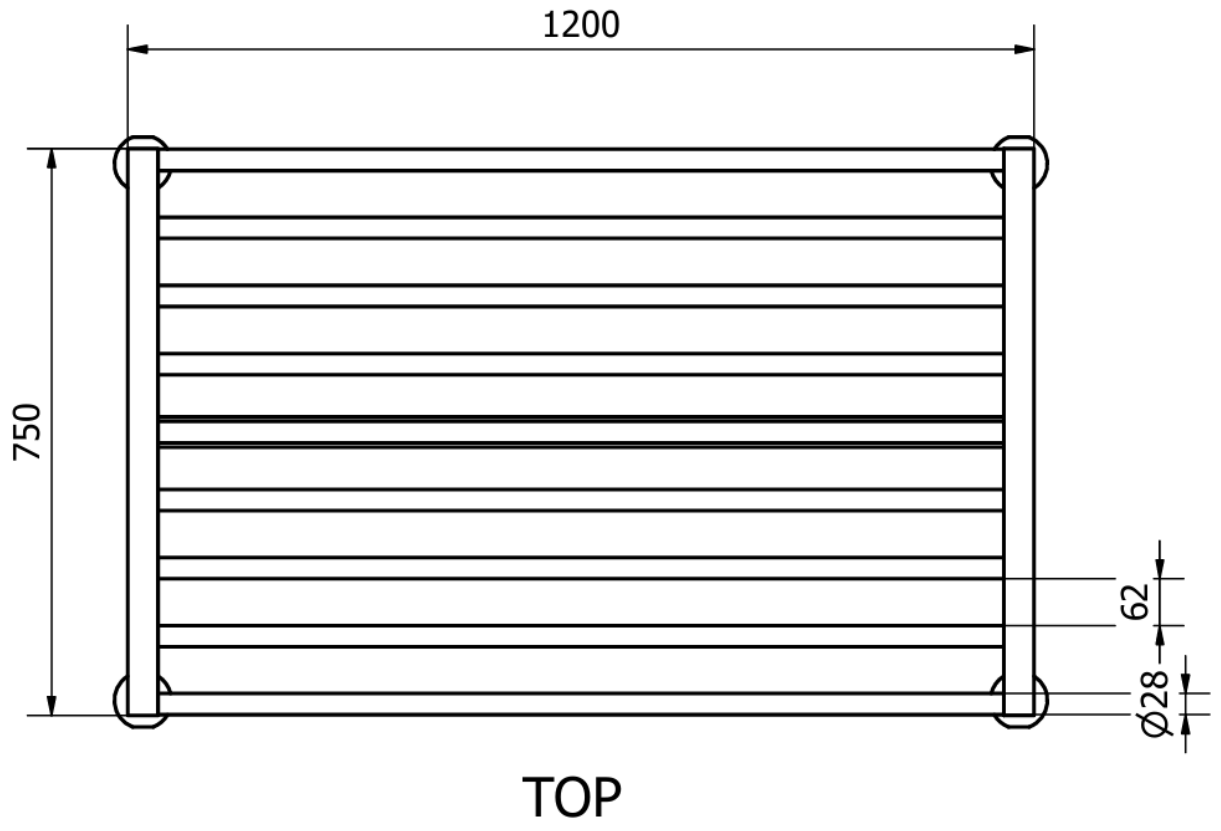

TOP VIEW · Top view showing the 1200mm overall length, 750mm overall width and Ø28mm round tube cross members. Dimensions in millimetres.

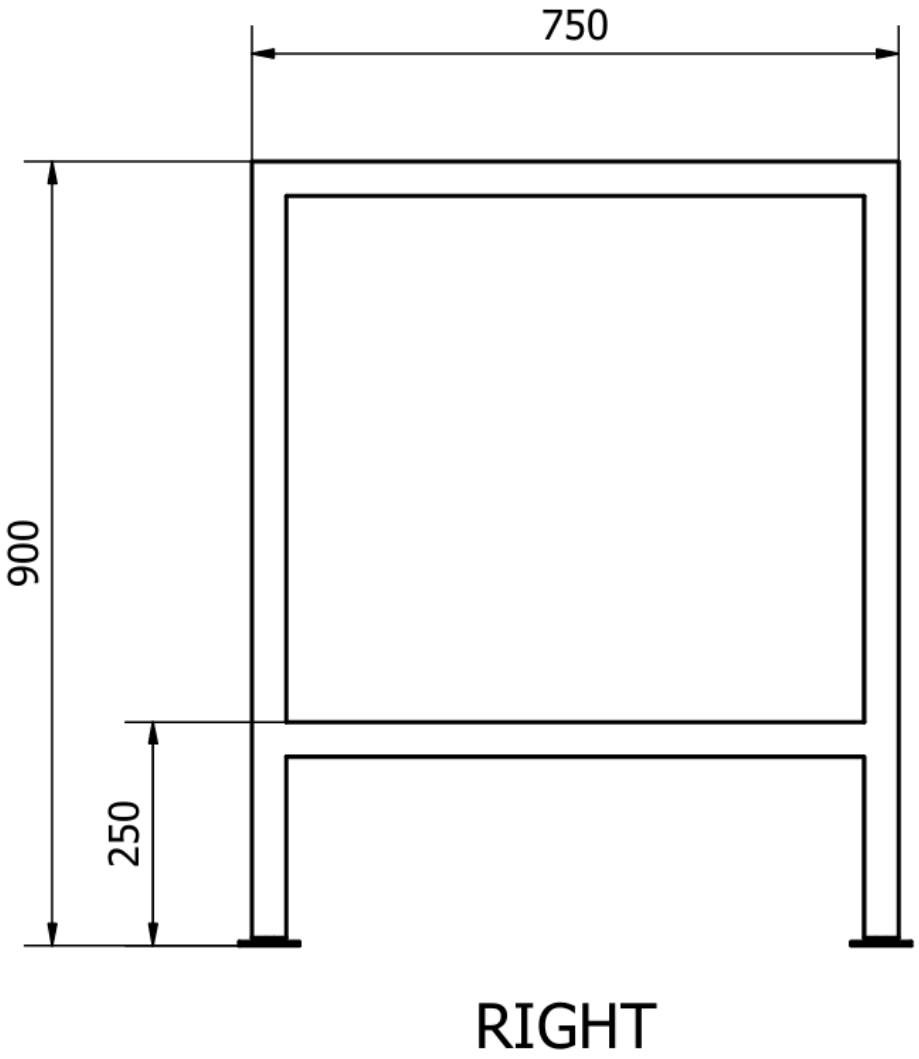

RIGHT VIEW · Right view showing the 750mm overall width and 900mm overall height. Dimensions in millimetres.

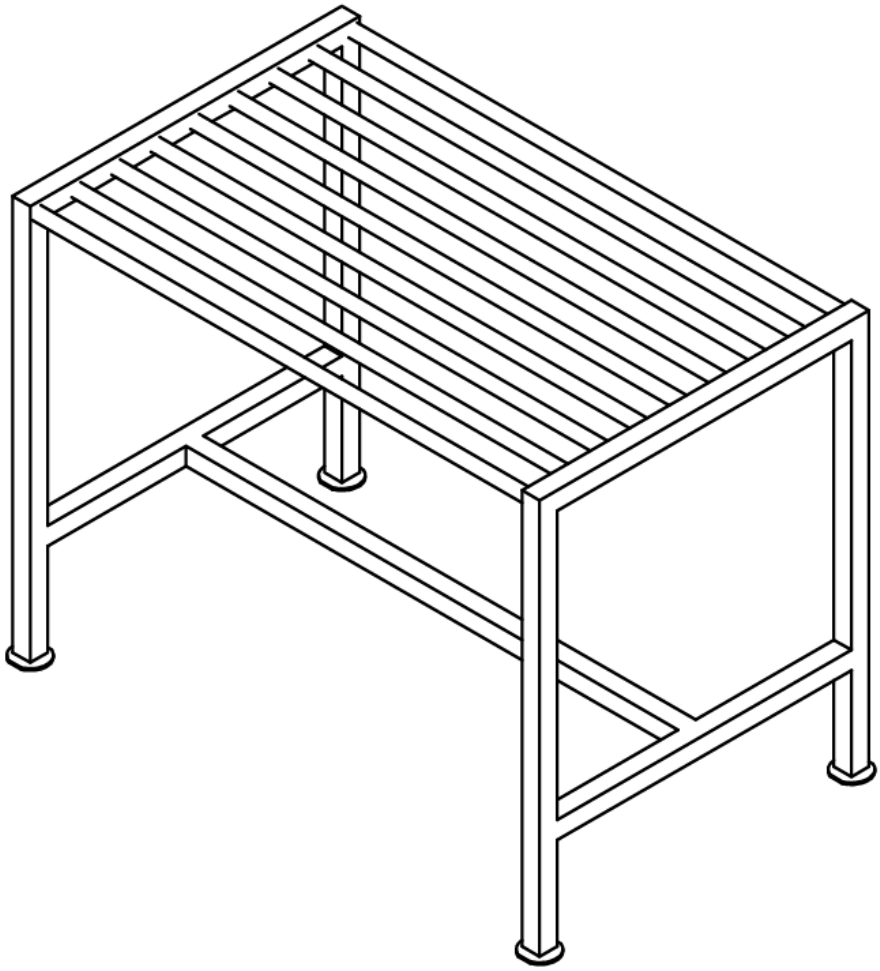

ISOMETRIC VIEW · Isometric drawing of the 1200mm x 750mm pot drying rack with square tubular framework, round tube cross members, cross bracing and adjustable feet.

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.