

PRODUCT RANGE SPECIFICATION

E53100(209-2000x900x650) – 2000 mm Commercial Stainless Steel Biltong Drying Cabinet

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	E53100(209-2000x900x650) {PSS}	Published catalogue data	14 Sep 2026

01 Product description and specification

Product description	The E53100 biltong drying cabinet is manufactured from Grade 430 stainless steel with a 0.91 mm casing thickness. Overall dimensions are 2000 mm high, 900 mm wide and 650 mm deep. The cabinet has six tiers and 15 hanging rods of 16 mm diameter. A removable drip tray allows collected residue to be emptied.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield E53100(209-2000x900x650). 2000 mm Commercial Stainless Steel Biltong Drying Cabinet. The E53100 biltong drying cabinet is manufactured from Grade 430 stainless steel with a 0.91 mm casing thickness. Overall dimensions: 2000 mm high, 900 mm wide and 650 mm deep.

02 Models and configurations

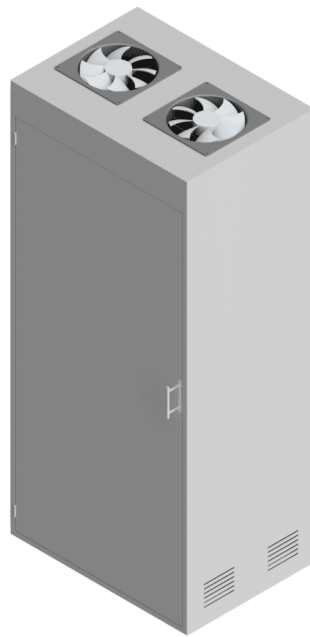
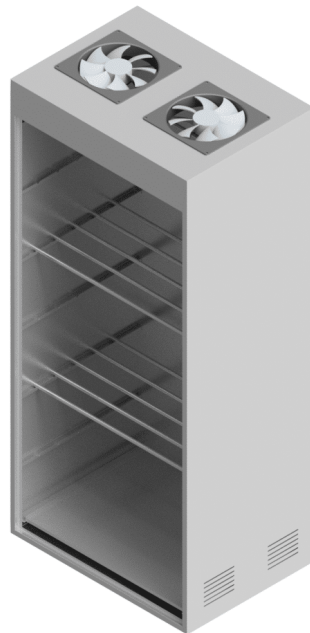
MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
E53100(209-2000x900x650)	BILTONG DRYING CABINET 2000MM H X 900MM W X 650MM D STAINLESS STEEL GRADE 430 CONSTRUCTION WITH 0.91MM THICK CASING, REMOVABLE DRIP TRAY, SIX TIER RACKS AND 15 X 16MM DIAMETER HANGING RODS	Standard configuration

03 Application information

Intended applications	Meat Processing
Industries	Meat & Poultry Processing

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images**PRODUCT IMAGE****PRODUCT IMAGE**

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.