

PRODUCT RANGE SPECIFICATION

E55810(0350S) – Countertop Drip Trays With Side Spout

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE E55810(0350S){PSS}	DATA STATUS Published catalogue data	GENERATED ON 20 Sep 2026
---------------------------------	--	---	-----------------------------

01 Product description and specification

Product description	This countertop drip-tray range collects drips beneath a removable perforated insert and drains through a side spout. Each tray is manufactured from Grade 304 stainless steel. Choose a length of 350, 450 or 650 mm and a width of 200 or 300 mm to suit the available counter area. All six models are 35 mm high. Position the tray on the countertop with the side spout directed towards a suitable drainage collection point. Allow clearance around the spout and confirm the drainage arrangement for the installation. For a tray fitted with a 40 mm (1½" BSP) waste and connected to pipework below the counter, see the separate E55810(W) range.
---------------------	--

Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield countertop drip tray with side drainage spout; Grade 304 stainless steel; removable perforated insert. Length: 350, 450 or 650 mm. Width: 200 or 300 mm. Overall height: 35 mm. Allow clearance for the side spout and the selected drainage arrangement.
--------------------------	--

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	—	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Drainage	Side spout	—	—

03 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
E55810(0350S)	Grade 304 stainless steel countertop drip tray, 350 x 300 mm, 35 mm high, with removable perforated insert and side drainage spout and stainless steel feet.	Length: 350 mm Width: 300 mm Overall dimensions: 350 x 300 x 35 mm (L x W x H)
E55810(S-0350x0200)	Grade 304 stainless steel countertop drip tray, 350 x 200 mm, 35 mm high, with removable perforated insert and side drainage spout.	Length: 350 mm Width: 200 mm Overall dimensions: 350 x 200 x 35 mm (L x W x H)

03 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
E55810(S-0450x0200)	Grade 304 stainless steel countertop drip tray, 450 x 200 mm, 35 mm high, with removable perforated insert and side drainage spout.	Length: 450 mm Width: 200 mm Overall dimensions: 450 x 200 x 35 mm (L x W x H)
E55810(S-0450x0300)	Grade 304 stainless steel countertop drip tray, 450 x 300 mm, 35 mm high, with removable perforated insert and side drainage spout.	Length: 450 mm Width: 300 mm Overall dimensions: 450 x 300 x 35 mm (L x W x H)
E55810(S-0650x0200)	Grade 304 stainless steel countertop drip tray, 650 x 200 mm, 35 mm high, with removable perforated insert and side drainage spout.	Length: 650 mm Width: 200 mm Overall dimensions: 650 x 200 x 35 mm (L x W x H)
E55810(S-0650x0300)	Grade 304 stainless steel countertop drip tray, 650 x 300 mm, 35 mm high, with removable perforated insert and side drainage spout.	Length: 650 mm Width: 300 mm Overall dimensions: 650 x 300 x 35 mm (L x W x H)

04 Functional features

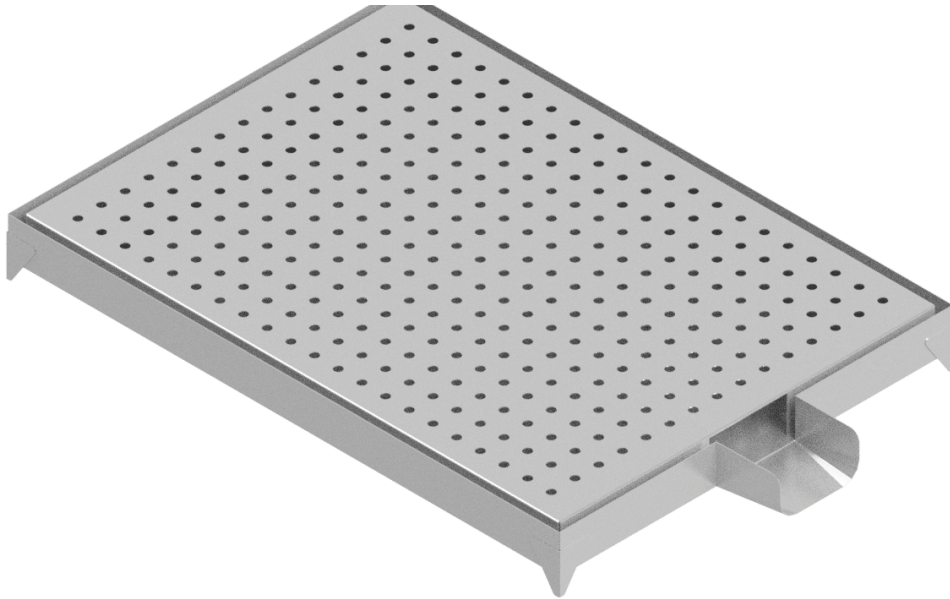
01	Side Drainage Spout Collected liquid drains through a spout at the side of the tray.
02	Removable Perforated Insert The perforated insert lifts out of the collecting tray.
03	Grade 304 Stainless Steel Stainless steel collecting tray and perforated insert.
04	Six Countertop Sizes Lengths of 350, 450 and 650 mm, each in 200 and 300 mm widths; 35 mm overall height.

05 Application information

Intended applications	Hot Water and Beverage Service
Industries	Hotels & Lodges, Restaurants & Cafés

06 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

PRODUCT IMAGE · 350 x 300 mm model shown. Other sizes vary.

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.