

PRODUCT RANGE SPECIFICATION

E55810(W) – Countertop Drip Trays With 40 mm Waste Outlet

DOCUMENT SCOPE
Product range

DOCUMENT REFERENCE
E55810(W){PSS}

DATA STATUS
Published catalogue data

GENERATED ON
20 Sep 2026

01 Product description and specification

Product description	The Basterfield E55810(W) range is designed for countertop installations where a drip tray is fitted with a waste fitting and plumbed into pipework. Each tray is manufactured from Grade 304 stainless steel with a removable perforated insert and a centre outlet for a 40 mm (1½" BSP) waste fitting. Place the tray on the countertop and fit a suitable 40 mm (1½" BSP) waste fitting. Provide a cut-out in the countertop beneath the centre waste outlet so the fitting can connect to the pipework below. Size the cut-out to suit the selected fitting and allow access below the counter for connection and servicing. Choose a length of 300, 450 or 650 mm and a width of 200 or 300 mm. The six published configurations are 35 mm high. Check the available counter area and below-counter clearance when selecting a size. For a tray with a side drainage spout, see the separate E55810(0350S) product.
---------------------	---

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield E55810(W) countertop drip tray; Grade 304 stainless steel; removable perforated insert; centre outlet for a 40 mm (1½" BSP) waste fitting. Length: 300, 450 or 650 mm. Width: 200 or 300 mm. Published models: 35 mm high. Provide a countertop cut-out and below-counter access for the selected waste fitting and pipework.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	—	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Waste Connection	40 mm (1½" BSP)	—	—

03 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
E55810(0650W)	Grade 304 stainless steel countertop drip tray, 650 x 300 mm, 35 mm high, with removable perforated insert and centre outlet for a 40 mm (1½" BSP) waste fitting.	Length: 650 mm Width: 300 mm Overall dimensions: 650 x 300 x 35 mm (L x W x H)

03 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
E55810(W-0300x0200)	Grade 304 stainless steel countertop drip tray, 300 x 200 mm, 35 mm high, with removable perforated insert and centre outlet for a 40 mm (1½" BSP) waste fitting.	Length: 300 mm Width: 200 mm Overall dimensions: 300 x 200 x 35 mm (L x W x H)
E55810(W-0300x0300)	Grade 304 stainless steel countertop drip tray, 300 x 300 mm, 35 mm high, with removable perforated insert and centre outlet for a 40 mm (1½" BSP) waste fitting.	Length: 300 mm Width: 300 mm Overall dimensions: 300 x 300 x 35 mm (L x W x H)
E55810(W-0450x0200)	Grade 304 stainless steel countertop drip tray, 450 x 200 mm, 35 mm high, with removable perforated insert and centre outlet for a 40 mm (1½" BSP) waste fitting.	Length: 450 mm Width: 200 mm Overall dimensions: 450 x 200 x 35 mm (L x W x H)
E55810(W-0450x0300)	Grade 304 stainless steel countertop drip tray, 450 x 300 mm, 35 mm high, with removable perforated insert and centre outlet for a 40 mm (1½" BSP) waste fitting.	Length: 450 mm Width: 300 mm Overall dimensions: 450 x 300 x 35 mm (L x W x H)
E55810(W-0650x0200)	Grade 304 stainless steel countertop drip tray, 650 x 200 mm, 35 mm high, with removable perforated insert and centre outlet for a 40 mm (1½" BSP) waste fitting.	Length: 650 mm Width: 200 mm Overall dimensions: 650 x 200 x 35 mm (L x W x H)

04 Functional features

01 For Plumbed Countertop Installations

Centre waste outlet for fitting a waste and connecting to pipework below the counter.

02 40 mm Waste Connection

Outlet for a 40 mm (1½" BSP) waste fitting.

03 Grade 304 Stainless Steel

Stainless steel collecting tray with a removable perforated insert.

04 Six Countertop Sizes

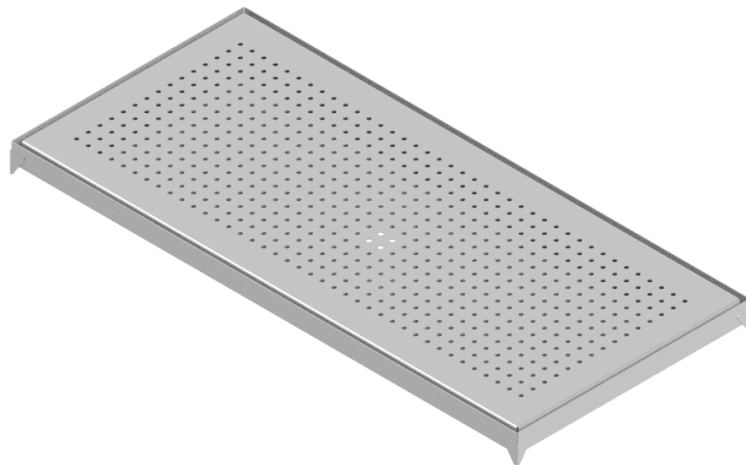
Lengths of 300, 450 and 650 mm; widths of 200 and 300 mm; published models are 35 mm high.

05 Application information

Intended applications	Hot Water and Beverage Service
Industries	Hotels & Lodges, Restaurants & Cafés

06 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

PRODUCT IMAGE · 650 x 300 mm model shown. Other sizes vary.

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.