

PRODUCT RANGE SPECIFICATION

H50145(C) – Mobile Stainless Steel Autopsy Table for Small Animals



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE  
Product range

DOCUMENT REFERENCE  
H50145(C){PSS}

DATA STATUS  
Published catalogue data

GENERATED ON  
5 Oct 2026

01 Product description and specification

Product description

The H50145(C) mobile veterinary autopsy table is designed for small-animal post-mortem examinations. Grade 304 stainless steel construction includes a tubular supporting frame and a brushed-finish top.

The top has a 30 mm recess and falls towards the waste outlet. Underbracing supports the slab, and an underside bitumastic coating provides sound deadening.

Four lockable castors allow the table to be moved and positioned. Confirm the required dimensions and waste connection for the examination area.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield H50145(C). Grade 304 stainless steel small-animal autopsy table; brushed finish; tubular frame; four lockable castors; 30 mm recessed top falling towards waste outlet; slab underbracing and underside sound deadening. Length and connection details as selected.

02 Models and configurations

| MODEL      | DESCRIPTION                                                                     | PUBLISHED CONFIGURATION |
|------------|---------------------------------------------------------------------------------|-------------------------|
| H501450900 | Autopsy Table to H50145(PSS) 900MM                                              | Length: 900 mm          |
| H501451200 | Autopsy Table to H50145(PSS) 1200MM                                             | Length: 1200 mm         |
| H501451500 | Autopsy Table to H50145(PSS) 1500MM<br>Fixed Plate Floor Mounting 4 X 6MM Holes | Length: 1500 mm         |
| H501451800 | Autopsy Table to H50145(PSS) 1800MM                                             | Length: 1800 mm         |

03 Application information

|                       |                     |
|-----------------------|---------------------|
| Intended applications | Animal Care         |
| Industries            | Veterinary Services |

04 Supply and support


Typical lead time 10–15 working days

|          |           |
|----------|-----------|
| Warranty | 12 months |
|----------|-----------|

Product drawings and images



PRODUCT IMAGE

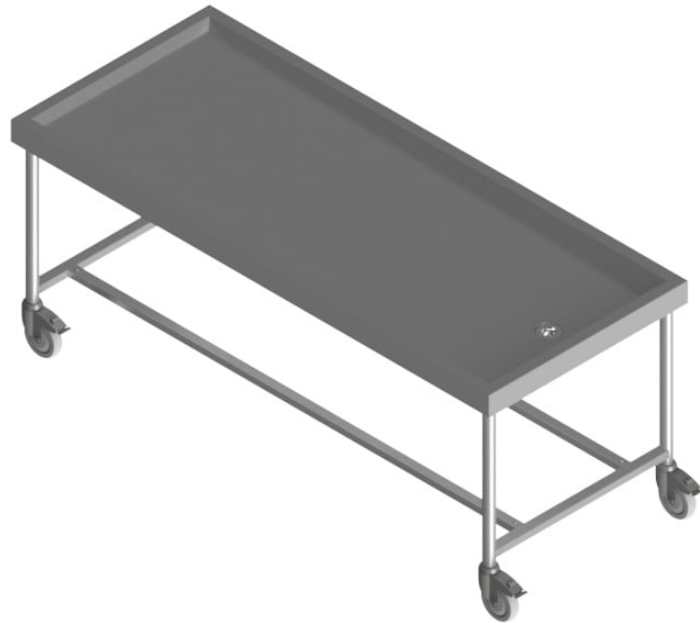

PRODUCT IMAGE



PRODUCT IMAGE



PRODUCT IMAGE

**VERIFICATION REQUIRED** Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.