

PRODUCT RANGE SPECIFICATION

H72722 – Stainless Steel Ventilated Dissection Table Floor Mounted

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	H72722{PSS}	Published catalogue data	14 Sep 2026

01 Product description and specification

Product description	Floor-mounted stainless steel dissection table with downdraft ventilation for laboratory and examination areas. Available in 1800 mm or 2400 mm lengths, the table is constructed from high-grade stainless steel (Grade 304 or 316), offering excellent corrosion resistance, durability, and ease of cleaning. The recessed work area is sloped for optimal drainage and includes an integrated sparge rinse system activated via push-button control for thorough cleaning. Ventilation is achieved through a downdraft system with a continuous grill integrated along the work surface and a 300 mm spigot outlet for external ducting. The table also includes an access panel for easy maintenance of internal plumbing and ventilation systems. Sink placement can be specified as left-hand or right-hand, and the tapware landing is suitable for medical mixers or alternative fittings. Optional add-ons include perforated trays, macerator units, hands-free mixers, and rinse spray assemblies to meet various operational needs.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield H72722 floor-mounted dissection table with downdraft ventilation, a continuous work-surface grille and 300 mm spigot outlet for external ducting. Length and Grade 304 or Grade 316 stainless steel construction as selected. External ventilation requirements to be coordinated with the installation.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
H72722(115-1800L)	H72722(115-1800L) Ventilated Dissection Table Floor Mounted Stainless Steel Grade 304 1800mm Length with Right-Hand Oriented Bowl Length: 1800. Basin Orientation: Left. Material: Stainless Steel Grade 304.	Basin Orientation: Left Length: 1800 mm Material: Stainless Steel Grade 304
H72722(115-1800R)	H72722(115-1800R) Ventilated Dissection Table Floor Mounted Stainless Steel Grade 304 1800mm Length with Right-Hand Oriented Bowl Length: 1800. Basin Orientation: Right. Material: Stainless Steel Grade 304.	Basin Orientation: Right Length: 1800 mm Material: Stainless Steel Grade 304

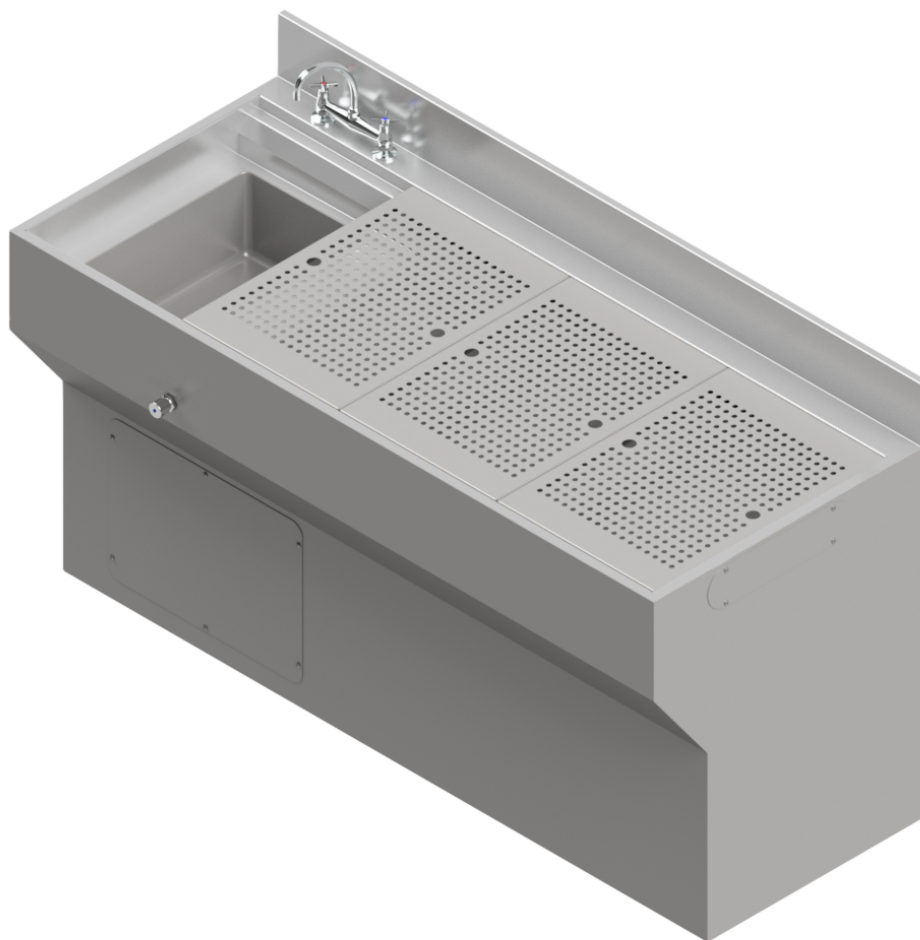
MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
H72722(115-2400L)	H72722(115-2400L) Ventilated Dissection Table Floor Mounted Stainless Steel Grade 304 2400mm Length with Left-Hand Oriented Bowl	Basin Orientation: Left Length: 2400 mm Material: Stainless Steel Grade 304
	Length: 2400. Basin Orientation: Left. Material: Stainless Steel Grade 304.	
H72722(115-2400R)	H72722(115-2400R) Ventilated Dissection Table Floor Mounted Stainless Steel Grade 304 2400mm Length with Right-Hand Oriented Bowl	Basin Orientation: Right Length: 2400 mm Material: Stainless Steel Grade 304
	Length: 2400. Basin Orientation: Right. Material: Stainless Steel Grade 304.	
H72722(315-1800L)	H72722 Ventilated Dissection Table Floor Mounted	Basin Orientation: Left Length: 1800 mm Material: Stainless Steel Grade 316
H72722(315-1800R)	H72722(315-1800R) Ventilated Dissection Table Floor Mounted Stainless Steel Grade 316 1800mm Length with Right-Hand Oriented Bowl	Basin Orientation: Right Length: 1800 mm Material: Stainless Steel Grade 316
	Length: 1800. Basin Orientation: Right. Material: Stainless Steel Grade 316.	
H72722(315-2400L)	H72722(315-2400L) Ventilated Dissection Table Floor Mounted Stainless Steel Grade 316 2400mm Length with Left-Hand Oriented Bowl	Basin Orientation: Left Length: 2400 mm Material: Stainless Steel Grade 316
	Length: 2400. Basin Orientation: Left. Material: Stainless Steel Grade 316.	
H72722(315-2400R)	H72722(315-2400R) Ventilated Dissection Table Floor Mounted Stainless Steel Grade 316 2400mm Length with Right-Hand Oriented Bowl	Basin Orientation: Right Length: 2400 mm Material: Stainless Steel Grade 316
	Length: 2400. Basin Orientation: Right. Material: Stainless Steel Grade 316.	

03 Application information

Intended applications	Dissection and Specimen Preparation
Industries	Clinical Laboratories, Pathology & Mortuary Services, Research Laboratories

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images**PRODUCT IMAGE**

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.