

PRODUCT RANGE SPECIFICATION

H72810 – Mortuary Vehicle Trolley Stainless Steel

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE H72810{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Grade 304 stainless steel mortuary vehicle trolley with a tubular frame for transferring bodies into compatible transport vehicles. Constructed entirely from Grade 304 stainless steel, it features a Ø28 mm tubular frame and handles for durability, corrosion resistance, and hygienic operation. The trolley has a total length of 2090 mm, a front width of 539 mm, and a tapered rear width of 347 mm to facilitate guided loading. It is engineered with offset wheel heights—featuring Ø125 mm fixed bracket front wheels and Ø200 mm rear bearing wheels—allowing one end of the trolley to be raised for seamless insertion into a vehicle. The full height including handrails is 369 mm, while the height from floor to tray surface is 291 mm. This trolley is built for stability, ease of manoeuvrability, and long service life in demanding mortuary environments.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield H72810. Mortuary Vehicle Trolley Stainless Steel. Constructed entirely from Grade 304 stainless steel, it features a Ø28 mm tubular frame and handles for durability, corrosion resistance, and hygienic operation. The trolley has a total length of 2090 mm, a front width of 539 mm, and a tapered rear width of 347 mm to facilitate guided loading.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
H72810	The Basterfield H72810 Mortuary Vehicle Trolley is a robust, purpose-designed solution for transferring bodies into mortuary transport vehicles. Constructed entirely from Grade 304 stainless steel, it features a Ø28mm tubular frame and handles for durability, corrosion resistance, and hygienic operation. The trolley has a total length of 2090mm, a front width of 539mm, and a tapered rear width of 347mm to facilitate guided loading. It is engineered with offset wheel heights—featuring Ø125mm fixed bracket front wheels and Ø200mm rear bearing wheels—allowing one end of the trolley to be raised for seamless insertion into a vehicle. The full height including handrails is 369mm, while the height from floor to tray surface is 291mm. This trolley is built for stability, ease of manoeuvrability, and long service life in demanding mortuary environments.	Standard configuration

03 Application information

Intended applications	Mortuary Preparation
Industries	Pathology & Mortuary Services


04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months


Product drawings and images



PRODUCT IMAGE

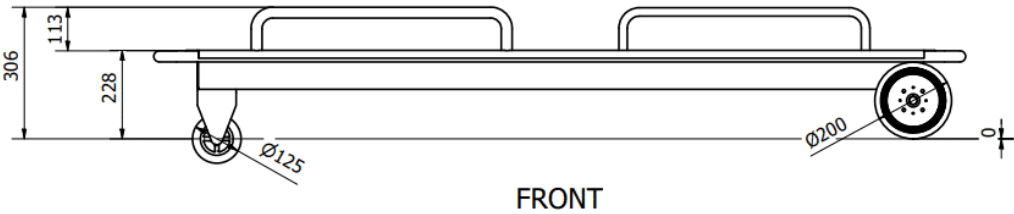


PRODUCT IMAGE

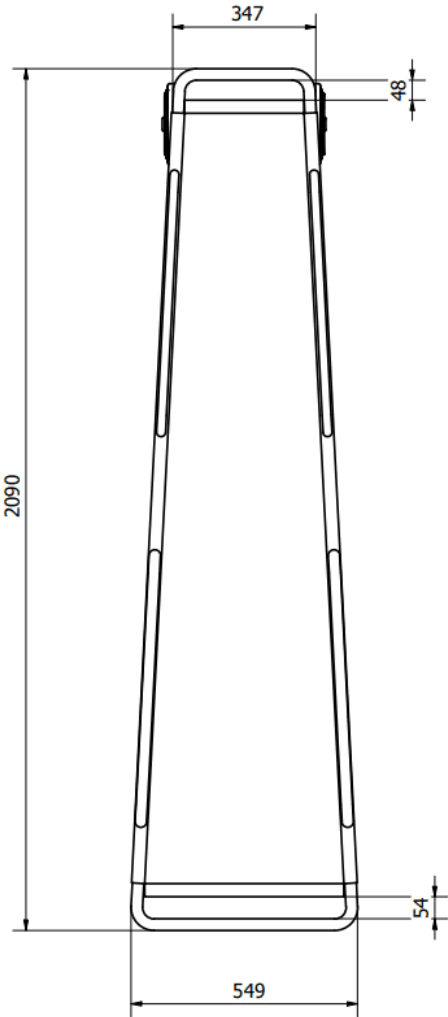

TOP

PRODUCT IMAGE

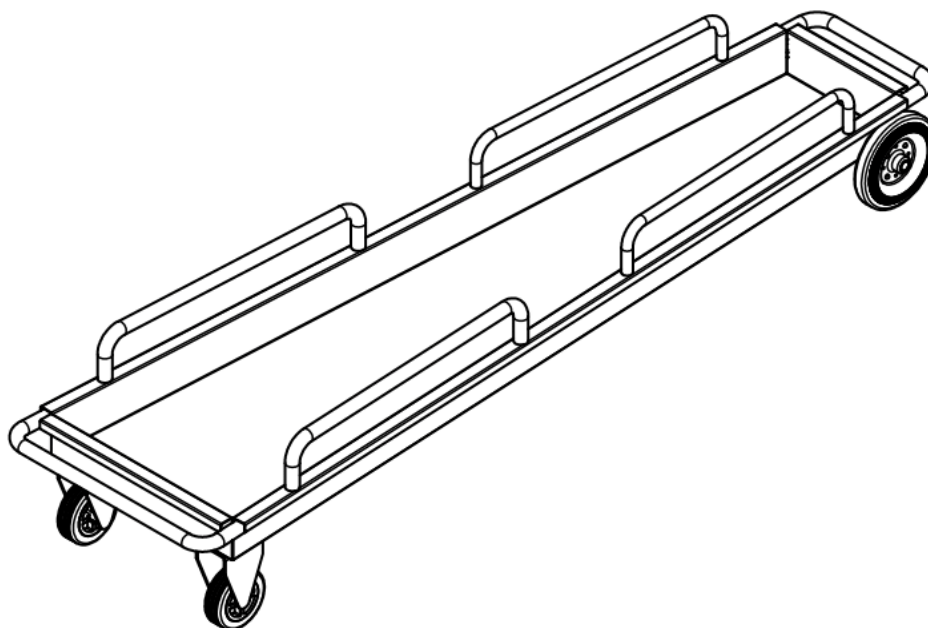

TOP RIGHT

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.