

PRODUCT RANGE SPECIFICATION

M30840(200) – Stainless Steel Meat Trolley

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE M30840(200){PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	--	---	-----------------------------

01 Product description and specification

Product description	200 L Grade 304 stainless steel meat trolley for transporting product in abattoirs, butcheries and processing areas. Fabricated from Grade 304 stainless steel, it offers a 200-litre capacity and is built to withstand harsh working environments. The trolley’s container section measures 660 mm (L) x 660 mm (W) x 505 mm (H), while the overall dimensions including castors and push handle are 753 mm (L) x 660 mm (W) x 685 mm (H). The structure includes a heavy-duty reinforced rim for added durability under load. Maneuverability is enhanced through a diamond formation castor setup featuring 150 mm diameter castors, with the centre castors offset lower to allow easy 360° rotation about the central axis—even when the trolley is fully loaded. This ergonomic feature allows for near-effortless directional changes using only light hand pressure. The trolley is fitted with a fixed stainless steel push handle for control and handling, and the 20 mm round bar stainless steel axles ensure long-term durability in wet or corrosive environments. Radiused internal corners aid in hygiene by preventing debris buildup and making cleaning quick and effective.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield M30840(200). Stainless Steel Meat Trolley. The trolley’s container section measures 660 mm (L) x 660 mm (W) x 505 mm (H), while the overall dimensions including castors and push handle are 753 mm (L) x 660 mm (W) x 685 mm (H). Maneuverability is enhanced through a diamond formation castor setup featuring 150 mm diameter castors, with the centre castors offset lower to allow easy 360° rotation about the central axis—even when the trolley is fully loaded.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
M30840(200)	Meat Trolley S/s Grade 304 2mm 200 Litre Capacity	Standard configuration

03 Application information

Intended applications	Material Handling, Meat Processing
Industries	Meat & Poultry Processing

04 Supply and support


Typical lead time	10–15 working days
-------------------	--------------------

Warranty	12 months
----------	-----------


Product drawings and images



PRODUCT IMAGE

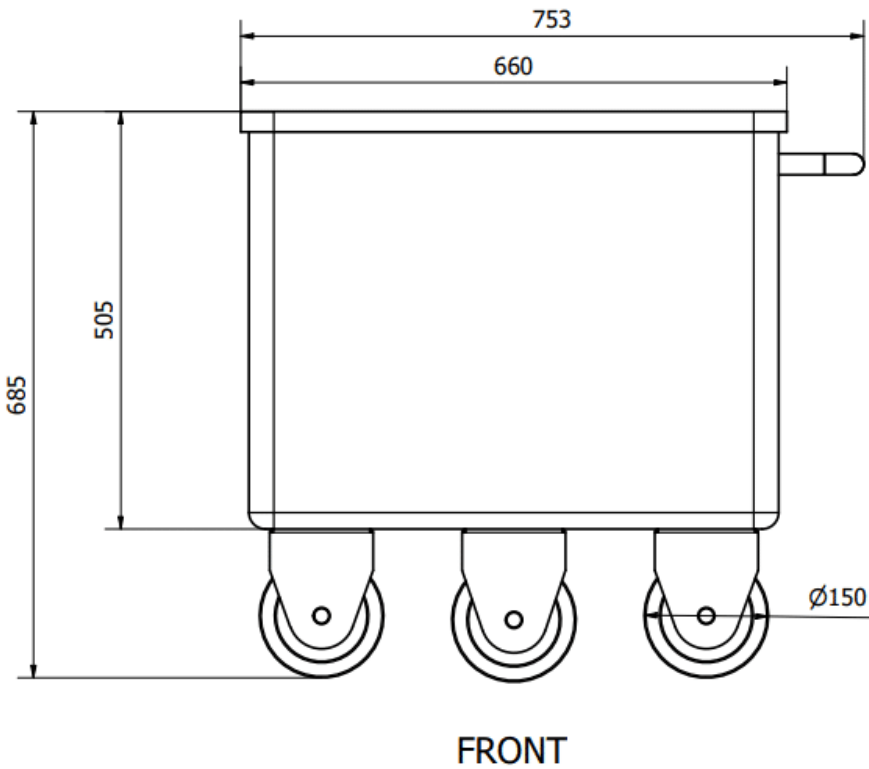


PRODUCT IMAGE

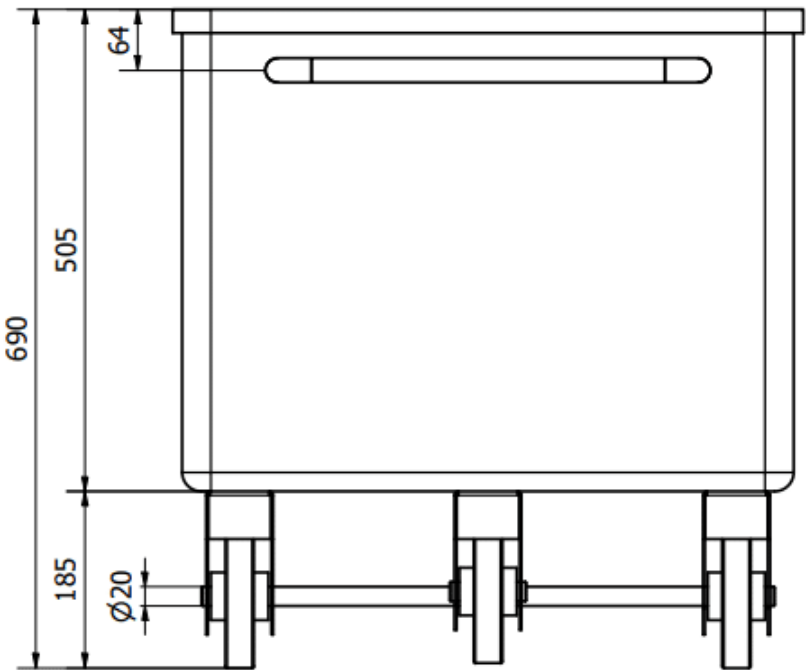


RIGHT

PRODUCT IMAGE

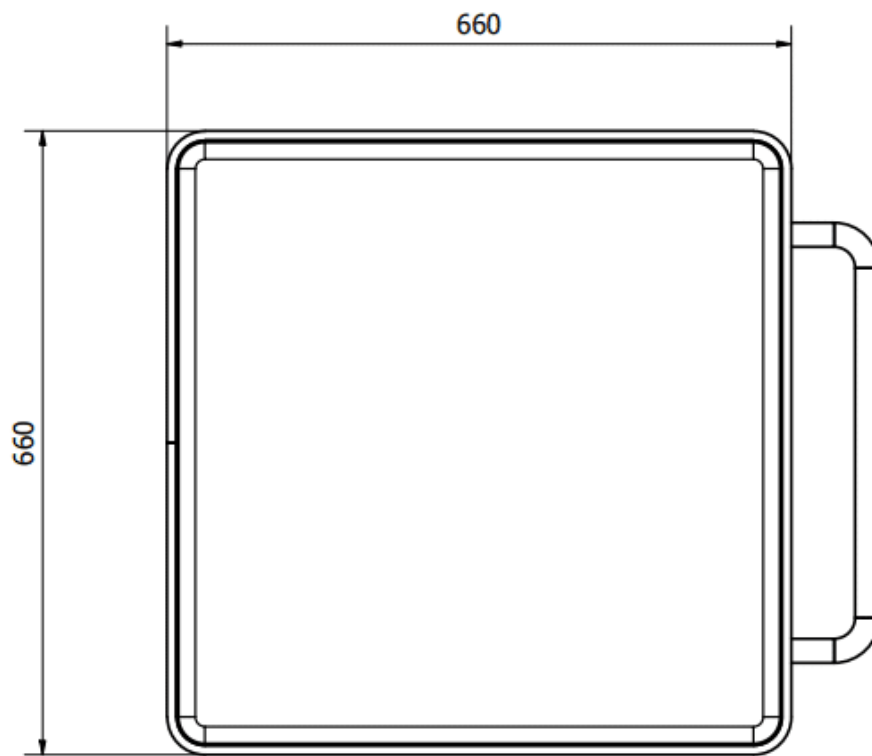

TOP

PRODUCT IMAGE

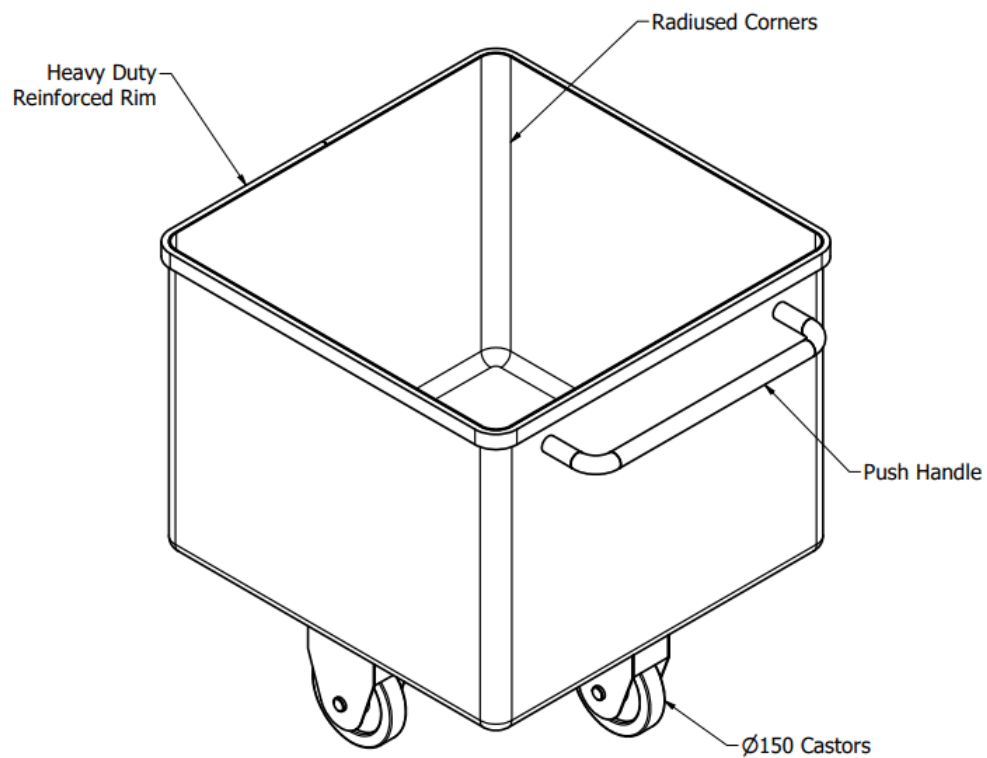

TOP RIGHT

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.