

PRODUCT RANGE SPECIFICATION

M30840(200) – Stainless Steel Meat Trolley



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

M30840(200){PSS}

DATA STATUS

Published catalogue data

GENERATED ON

4 Oct 2026

01 Product description and specification

Product description

200 L Grade 304 stainless steel meat trolley for transporting product in abattoirs, butcheries and processing areas.

Fabricated from Grade 304 stainless steel, it offers a 200-litre capacity and is built to withstand harsh working environments.

The trolley’s container section measures 660 mm (L) x 660 mm (W) x 505 mm (H), while the overall dimensions including castors and push handle are 753 mm (L) x 660 mm (W) x 685 mm (H). The structure includes a heavy-duty reinforced rim for added durability under load.

Maneuverability is enhanced through a diamond formation castor setup featuring 150 mm diameter castors, with the centre castors offset lower to allow easy 360° rotation about the central axis—even when the trolley is fully loaded. This ergonomic feature allows for near-effortless directional changes using only light hand pressure.

The trolley is fitted with a fixed stainless steel push handle for control and handling, and the 20 mm round bar stainless steel axles ensure long-term durability in wet or corrosive environments. Radiused internal corners aid in hygiene by preventing debris buildup and making cleaning quick and effective.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield M30840(200). Stainless Steel Meat Trolley. The trolley’s container section measures 660 mm (L) x 660 mm (W) x 505 mm (H), while the overall dimensions including castors and push handle are 753 mm (L) x 660 mm (W) x 685 mm (H). Maneuverability is enhanced through a diamond formation castor setup featuring 150 mm diameter castors, with the centre castors offset lower to allow easy 360° rotation about the central axis—even when the trolley is fully loaded.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
M30840(200)	Meat Trolley S/s Grade 304 2mm 200 Litre Capacity	Standard configuration

03 Application information

Intended applications


Material Handling, Meat Processing

Industries	Meat & Poultry Processing
------------	---------------------------


04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months


Product drawings and images

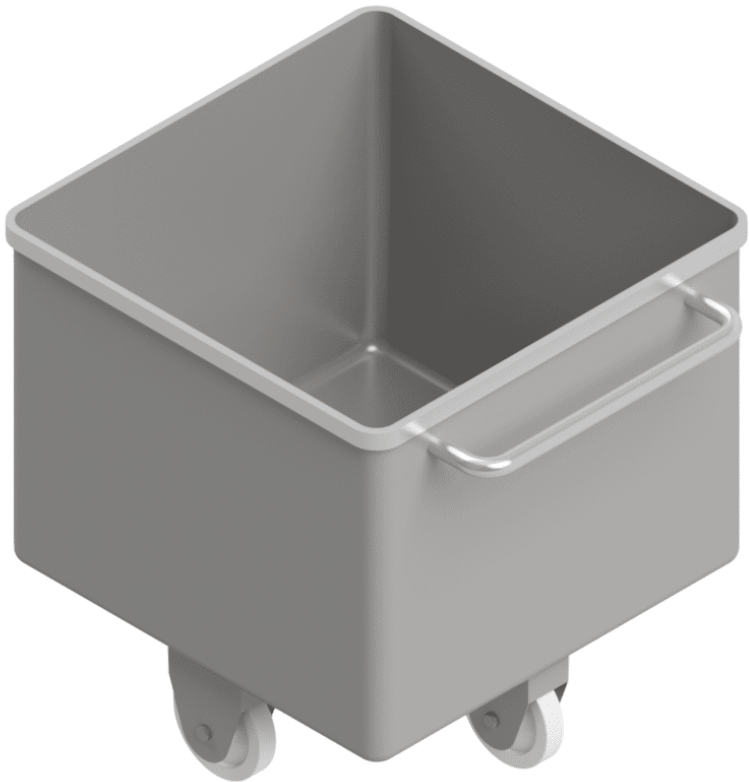

PRODUCT IMAGE

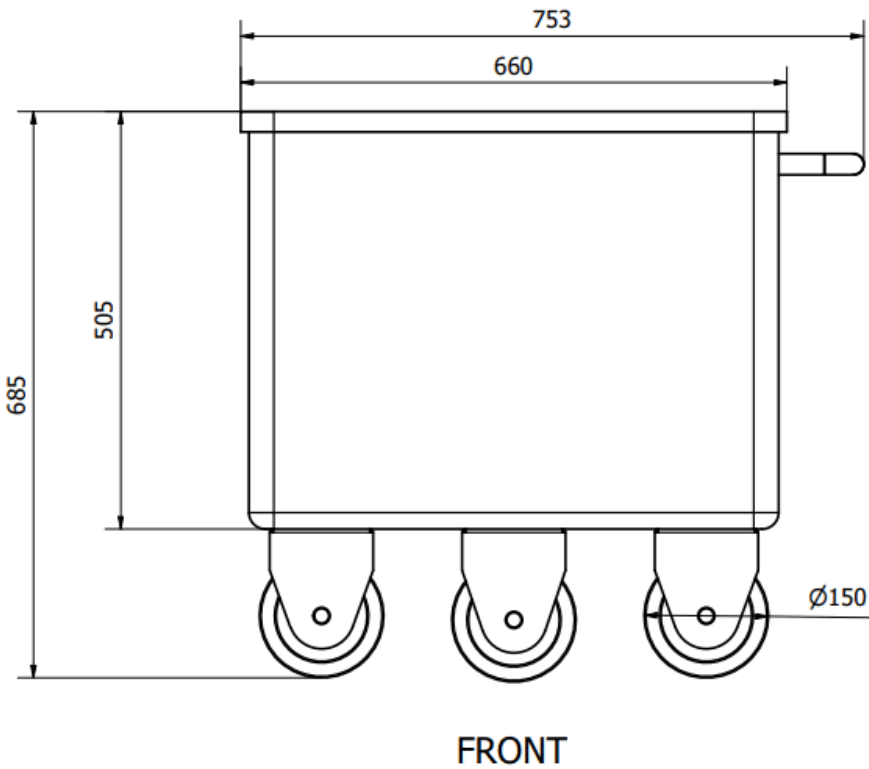


PRODUCT IMAGE

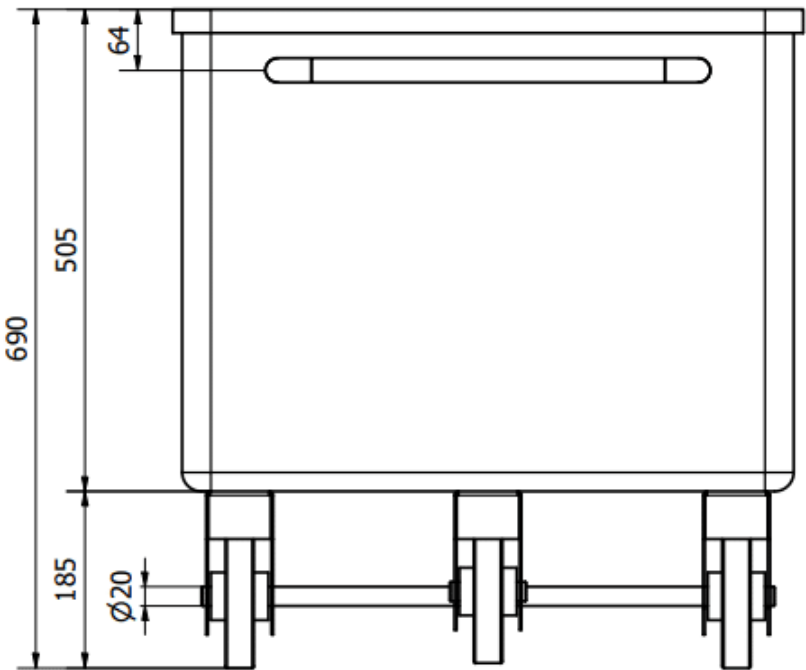


RIGHT

PRODUCT IMAGE

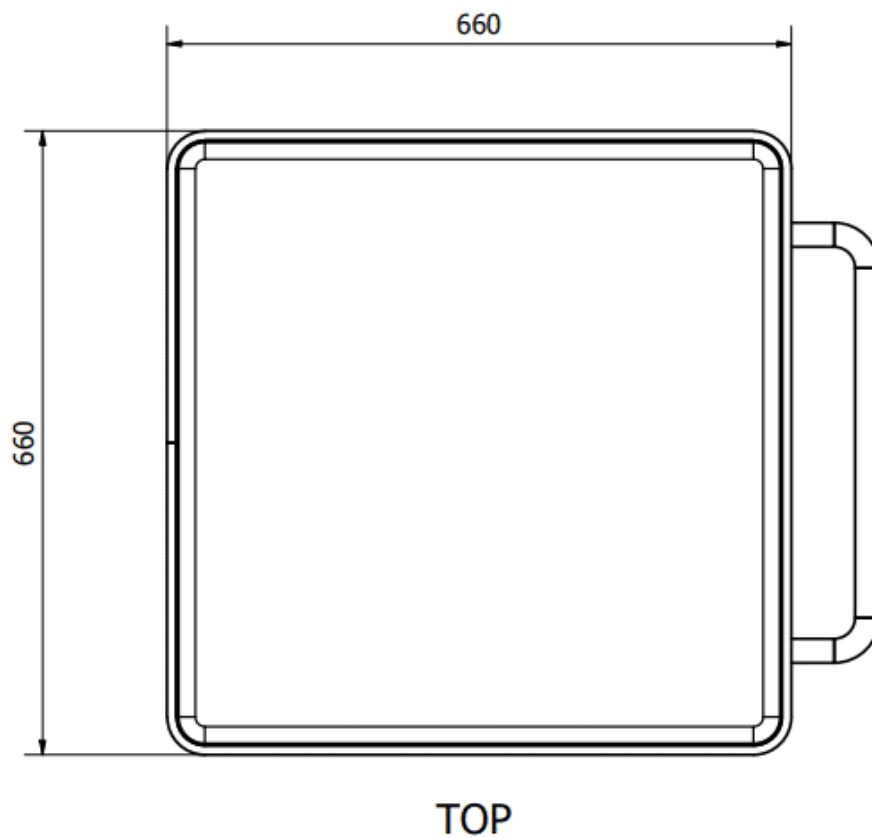

PRODUCT IMAGE

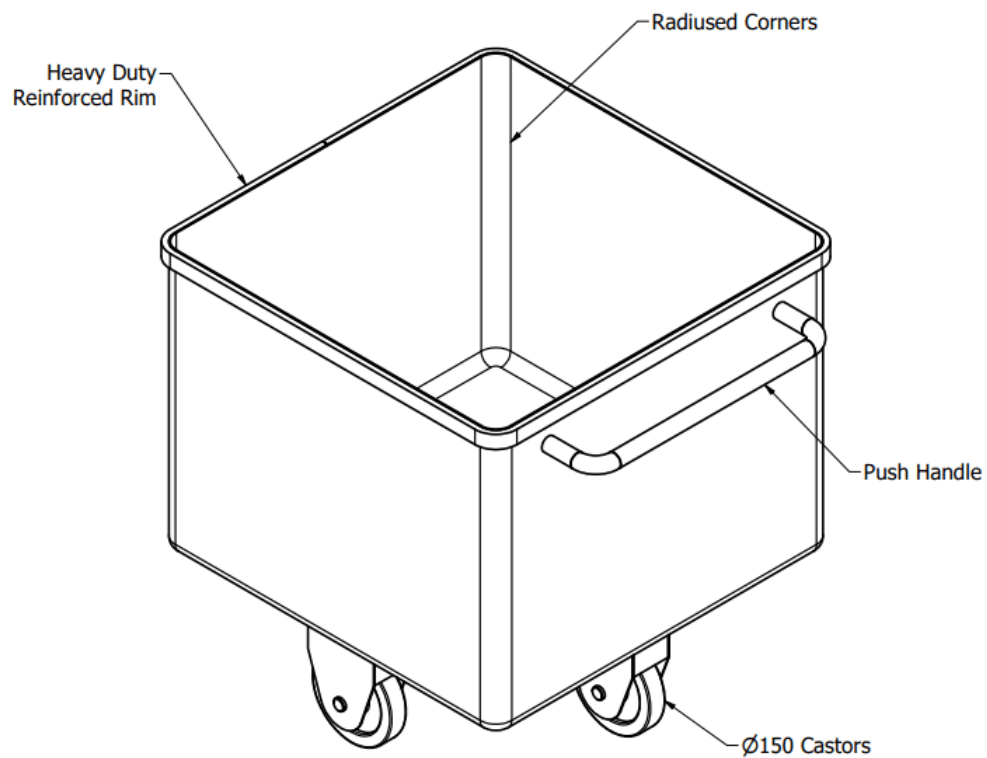

TOP RIGHT

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.