PRODUCT RANGE SPECIFICATION

M30890(1800x750x1900) – Stainless Steel Carcass Trolley



PRODUCT IMAGE · Carcass trolley with drip tray and push handles

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	**M30890(1800x750x1900){PSS}**	**14 Nov 2026**

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/m308901800x750x1900-stainless-steel-carcass-trolley#specifications

01 Product description and specification

Product description

Grade 304 stainless steel carcass trolley, 1800mm x 750mm x 1900mm, with easy-clean fully welded construction, six Ø150mm industrial white polymer wheels, offset centre wheels, push handles and a heavy-duty drip tray.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Carcass trolley, Grade 304 stainless steel, with 40mm x 40mm square tube uprights and base and a Ø38.1mm x 1.5mm wall round tube hanging cross member. 1800mm (L) x 750mm (W) x 1900mm (H). Fully welded without crevices for easy cleaning. Six industrial castor wheels with Ø150mm white polymer wheels and an offset centre pair for pivoting and one-hand rotation. Convenient push handles and a heavy-duty 1.5mm Grade 304 stainless steel drip tray included. Unit weight: 68kg.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Length	1800	mm	The length of the item typically as measured from left to right.
Width	750	mm	The width of the item typically as measured from front to back.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Height	1900	mm	Overall vertical envelope, including the splashback where fitted. For tables and sinks, this is distinct from working height.
Weight	68	kg	–
Framework Profile	40mm x 40mm Square Tube Uprights and Base	–	Tubular supporting frame.
Cross Member Diameter	38.1	mm	Outside diameter of round tubular cross members.
Cross Member Wall Thickness	1.5	mm	–
Construction	Fully Welded Without Crevices	–	All welded table construction.
Number of Castors	6	–	Four castors support the mobile table.
Castor Type	Industrial	–	The steering arrangement of the fitted castors.
Wheel Material	White Polymer	–	The material of the fitted wheels.
Castor Diameter (mm)	150	mm	–
Wheel Arrangement	Offset Centre Pair for Pivoting and One-Hand Rotation	–	–
Drip Tray	Included	–	–
Drip Tray Material	Stainless Steel Grade 304	–	–
Drip Tray Thickness	1.5	mm	–
Handle Type	Push Handles	–	The carrying handle construction fitted to this milk-can product.

03 Functional features

01 Grade 304 Stainless Steel
The uprights and base use 40mm x 40mm square tube. The hanging cross member uses Ø38.1mm round tube with a 1.5mm wall thickness.

02 Easy-Clean Welded Construction
Fully welded construction without crevices makes the trolley easy to clean and reduces places where residue can collect.

03 Six Industrial Wheels
Six Ø150mm industrial castor wheels with white polymer wheels support the trolley during movement.

04 Offset Centre Wheels
Shift the trolley onto its offset centre pair to pivot and change direction easily, including one-hand rotation.

05 Heavy-Duty Drip Tray
The included 1.5mm Grade 304 stainless steel drip tray collects runoff during carcass handling.

06 Convenient Push Handles
Push handles assist with moving and positioning the trolley.

04 Application information

Intended applications	Material Handling, Meat Processing
Industries	Meat & Poultry Processing

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

What are the overall dimensions?

The trolley measures 1800mm long x 750mm wide x 1900mm high.

What is the trolley made from?

The trolley is made from Grade 304 stainless steel with fully welded construction. Its uprights and base use 40mm x 40mm square tube; the hanging cross member uses Ø38.1mm round tube with a 1.5mm wall thickness.

How do the offset centre wheels work?

The offset centre pair allows the trolley to be shifted onto the middle wheels and pivoted, making changes of direction easier and allowing one-hand rotation.

Which wheels are fitted?

The trolley has six industrial castor wheels with white polymer wheels, each 150mm in diameter.

Is the trolley easy to clean?

Yes. The fully welded construction has no crevices where residue can collect, making the unit easy to clean. The included drip tray collects runoff during handling.


What is the drip tray made from?

The included heavy-duty drip tray is made from 1.5mm Grade 304 stainless steel.


How much does the trolley weigh?

The unit weighs 68kg.


Product drawings and images

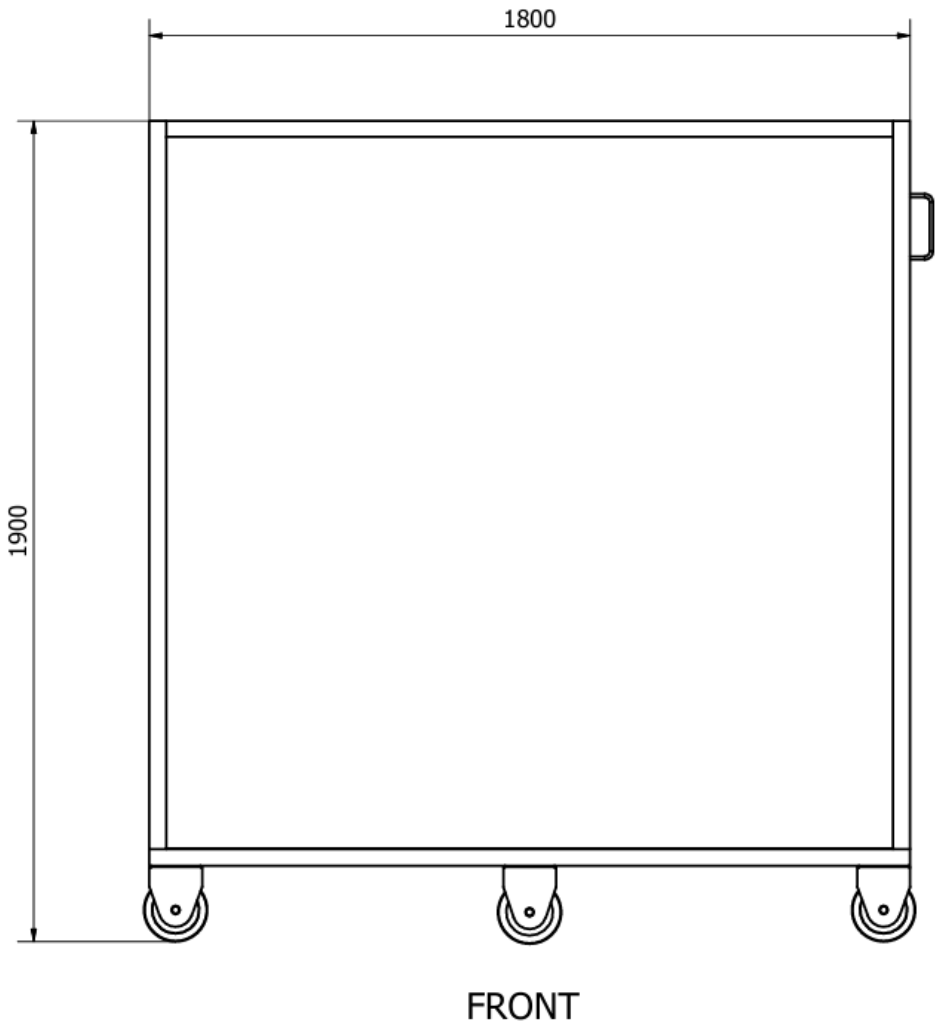


FRONT VIEW · Front elevation — 1800mm length and 1900mm overall height

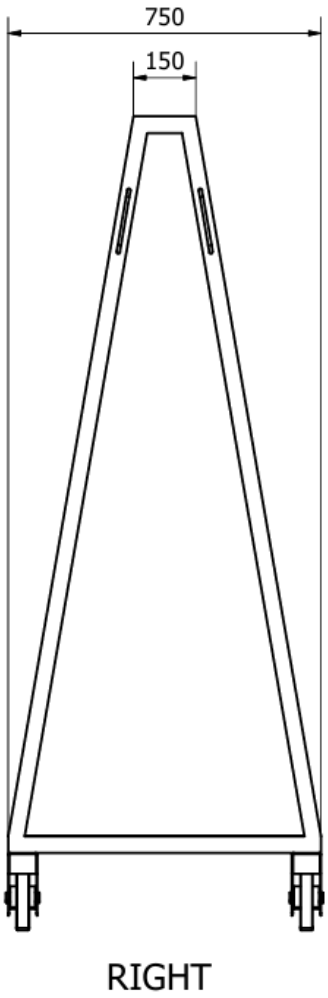

RIGHT VIEW · Right elevation — 750mm overall width

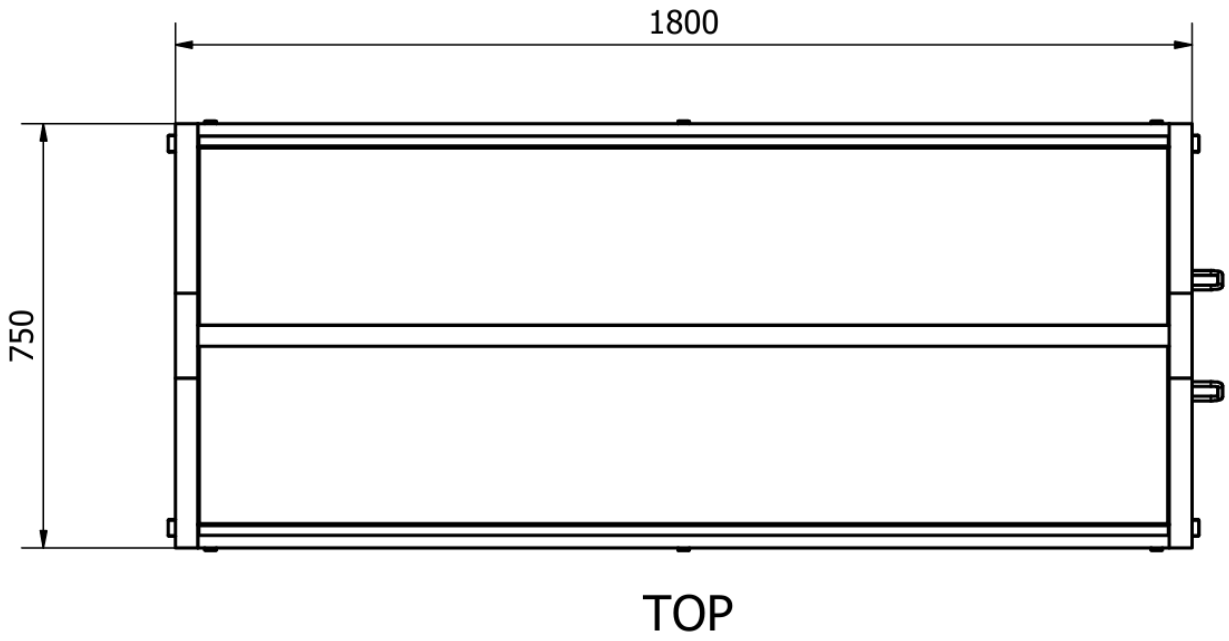

TOP VIEW · Top view — 1800mm x 750mm

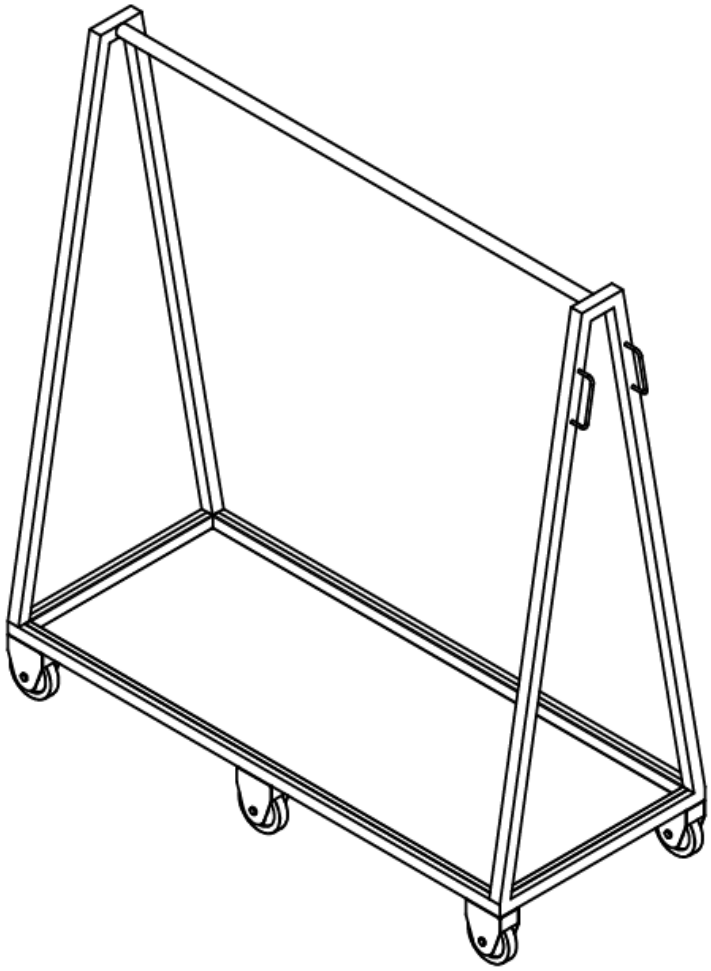

ISOMETRIC VIEW · Isometric view — frame, hanging cross member, drip tray and push handles

E&OE. Specifications are subject to change without notice.