PRODUCT RANGE SPECIFICATION

M48960(06) – Wall-Mounted Stainless Steel Knife Steriliser, 6 Knives



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	M48960(06){PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/m4896006-wall-mounted-stainless-steel-knife-steriliser-6-knives#specifications

01 Product description and specification

Product description

Wall-mounted Grade 304 stainless steel water knife steriliser for six knives. 230mm × 267mm × 551mm overall, with ½-inch inlet and overflow connections and a 3kW / 220V heating element.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield M48960(06). Wall-mounted six-knife water steriliser in Grade 304 stainless steel, 230mm (L) × 267mm (W) × 551mm (H); 450mm tank body; 340mm vertical mounting-hole centres; maximum blade length 335mm; handle depth 85mm; removable knife holder and drop-on lid; ½-inch lever-operated ball valve inlet and ½-inch overflow; 3kW / 220V heating element with adjustable 50–110°C thermostat. Switch off heating if the incoming water is shut off.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	Grade 304 stainless steel tank and housing.
Length	230	mm	Overall width across the front, including the mounting lugs.
Width	267	mm	Overall front-to-back depth.
Height	551	mm	Overall height including the lower electrical/control housing.
Knife Capacity	6	–	Number of knives accommodated by the removable holder.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Tank Body Height	450	mm	Tank body height; overall assembly height is 551mm.
Bracket Mounting Hole Pitch	340	mm	Vertical centre-to-centre spacing between the upper and lower mounting holes on each side.
Maximum Blade Length	335	mm	Maximum knife blade length.
Handle Depth	85	mm	Handle depth allowance above the blade.
Mounting Type	Wall Mounted	–	–
Water Inlet	½-Inch Lever-Operated Ball Valve	–	–
Overflow Connection	½-Inch	–	Water overflow connection near the top of the unit.
Heating Element Power	3	kW	Rated heating element power.
Heating Element Voltage	220	VAC	–
Thermostat Range	50–110°C	–	Adjustable thermostat setting range.

03 Functional features

01 **Six-Knife Capacity**
Wall-mounted Grade 304 stainless steel construction with a removable knife holder.

02 **Dimensioned Mounting Details**
230mm × 267mm × 551mm overall size with 340mm vertical mounting-hole centres.

03 **Controlled Water Flow**
½-inch lever-operated ball valve inlet and ½-inch overflow connection.

04 **Serviceable Heating**
3kW / 220V heating element with adjustable 50–110°C thermostat.

04 Application information

Intended applications	Knife Sterilisation
Industries	Food & Beverage Processing, Meat & Poultry Processing

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

What are the overall dimensions?
230mm across the front × 267mm front to back × 551mm overall height. The tank body is 450mm high.

How many knives does this model hold?
Six knives, with a maximum blade length of 335mm and a handle depth of 85mm.

What is the mounting-hole spacing?

Upper and lower mounting-hole centres are 340mm apart vertically on each side.

What water connections are provided?

A ½-inch lever-operated ball valve inlet and a ½-inch overflow connection. The overflow can be connected to drainage.


What heating element and control are fitted?

A 3kW / 220V heating element with an adjustable 50–110°C thermostat.


What must happen if the incoming water is shut off?

Switch off the electrical heating when the incoming water is manually shut off to prevent dry heating and element damage.


Product drawings and images

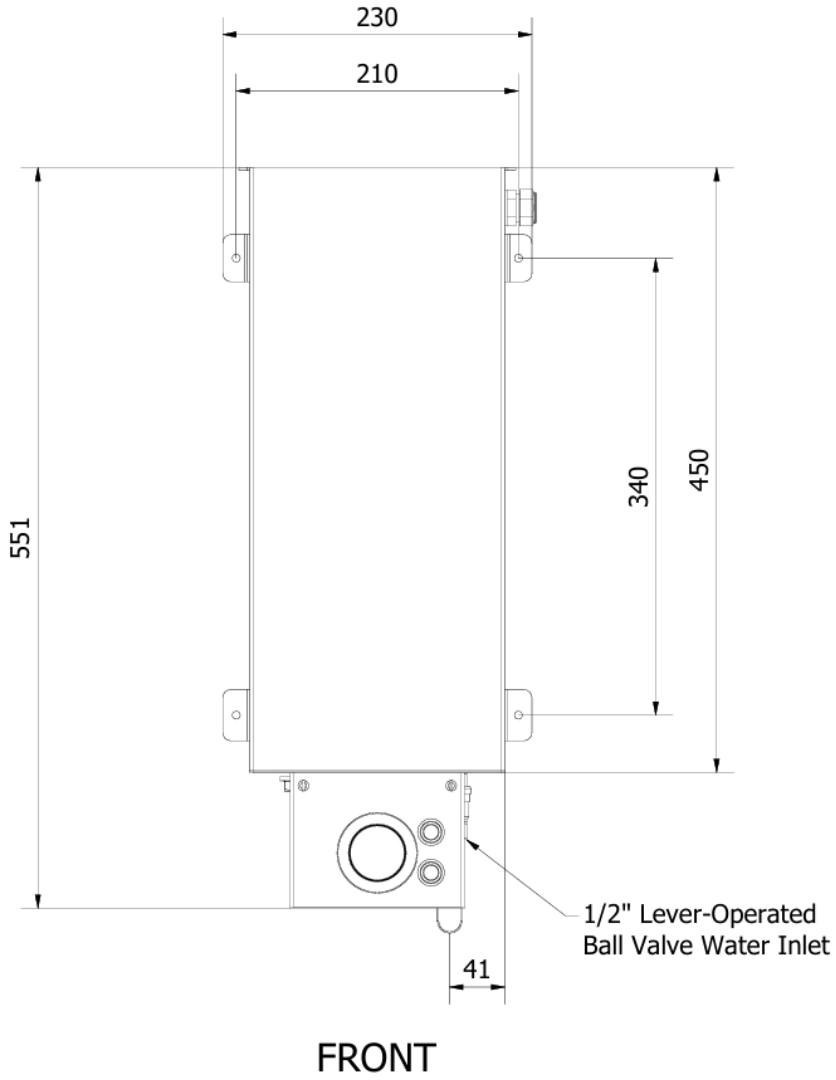


FRONT VIEW · M48960(06) - Front Drawing

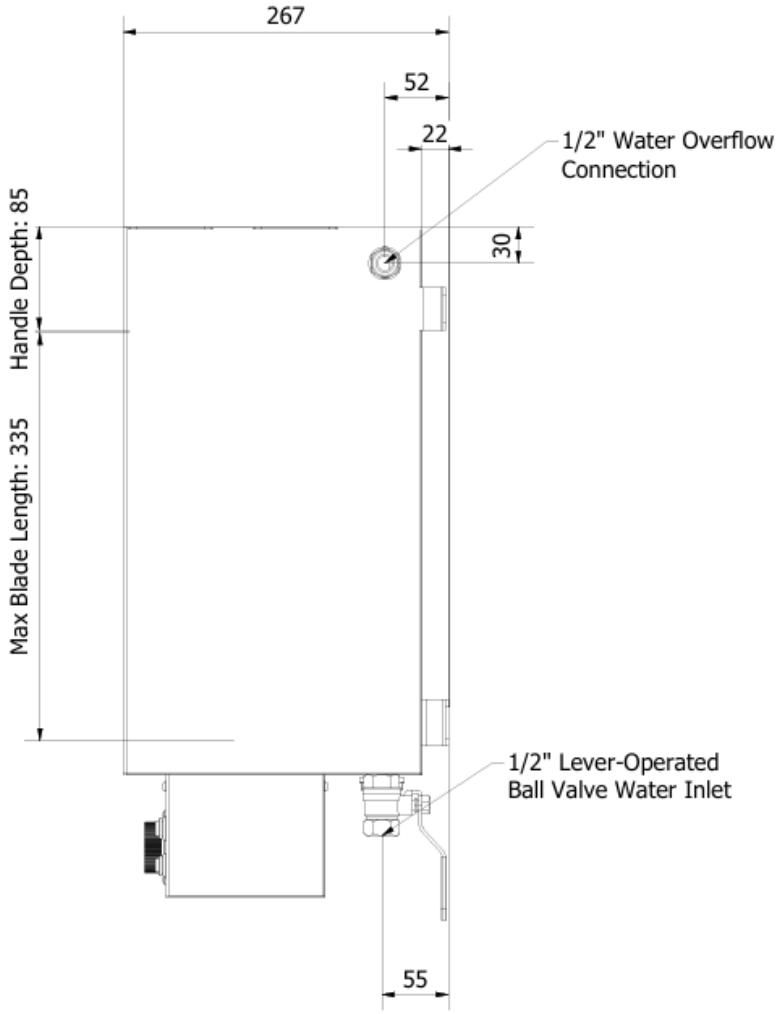

RIGHT VIEW · M48960(06) - Right Drawing

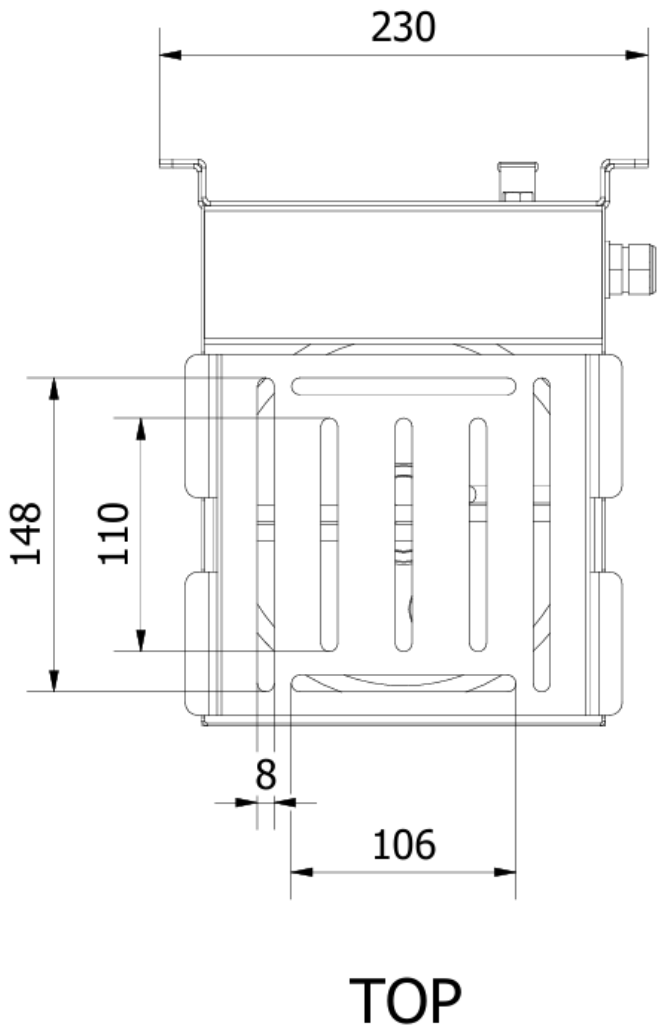

TOP VIEW · M48960(06) - Top Drawing

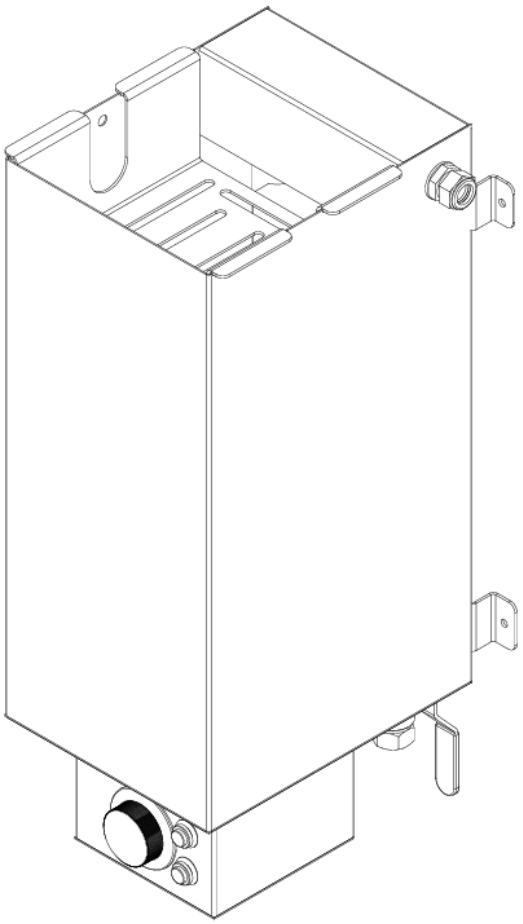

ISOMETRIC VIEW · M48960(06) - Isometric Drawing

E&OE. Specifications are subject to change without notice.