

PRODUCT RANGE SPECIFICATION

04VF_WAL-103LC – Walcro 103LC Concealed Back-Entry Flush Valve

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	04VF_WAL-103LC{PSS}	Published catalogue data	19 Sep 2026

01 Product description and specification

Product description	The Walcro 103LC is a concealed back-entry toilet flushing valve with a 20 mm BSP inlet. The issued catalogue code is 04VF_WAL-103LC and the supplied specification reference is 04VF_WAL103LC{PSS}. The package includes the 20 mm BSP DZR brass flushing valve, WC pan adaptor, VR push button and housing assembly, push rod, concealed flush pipes and a 90-degree bend. The drawing specifies a 500 mm push rod, a 500 mm vertical flush-pipe section, a 350 mm horizontal section and a 28 mm flush-pipe diameter. The manufacturer specifies an operating-pressure range of 100 to 600 kPa. The flushing volume is adjustable on site. Confirm the water supply, wall space and pipe alignment for the selected WC pan before installation. The supplied carton dimensions are 560 mm (L) x 150 mm (W) x 100 mm (H), with a packed weight of 5 kg. These are packaging dimensions, not the installed valve envelope. Manufactured in South Africa.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Walcro 103LC concealed back-entry toilet flushing valve, catalogue code 04VF_WAL-103LC, to specification reference 04VF_WAL103LC{PSS}. 20 mm BSP DZR brass valve; VR push button and housing; WC pan adaptor; 500 mm push rod; concealed 28 mm-diameter flush pipes with 500 mm vertical section, 350 mm horizontal section and 90-degree bend; manufacturer pressure range 100 to 600 kPa. Carton: 560 x 150 x 100 mm; packed weight: 5 kg.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
04VF_WAL-103LC	Walcro 103LC concealed back-entry toilet flushing valve to 04VF_WAL103LC{PSS}, 20 mm BSP, with VR push button and sleeve. Box: 560 x 150 x 100 mm; packed weight 5 kg.	Standard configuration

03 Application information


Intended applications	Public Restrooms
Industries	Government & Public Sector, Schools

04 Supply and support

Typical lead time	10–15 working days
-------------------	--------------------

Warranty	12 months
----------	-----------

Product drawings and images

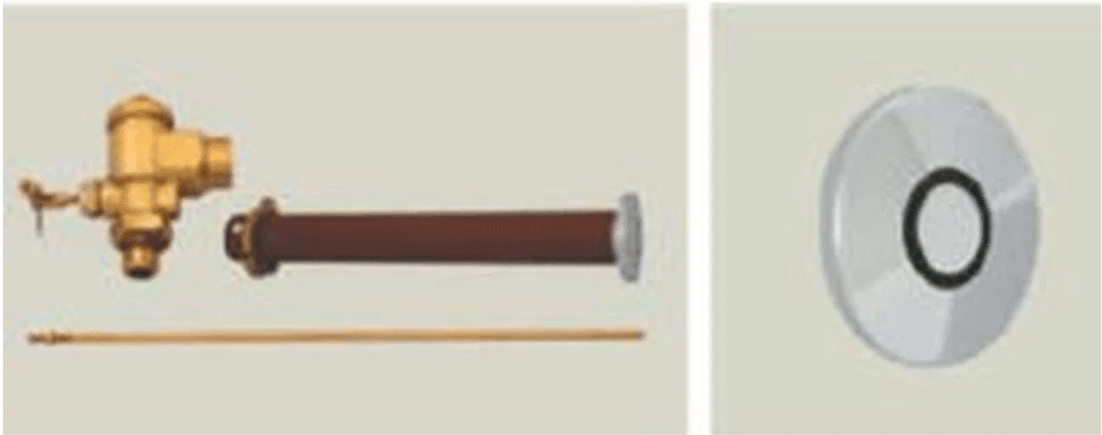

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.