

PRODUCT RANGE SPECIFICATION

B17642 – Stainless Steel Pedestal Toilets

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B17642{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Floor-mounted Grade 304 stainless steel toilet pan with a back-entry flush inlet for public and institutional washrooms. Constructed from 1.2 mm thick Grade 304 stainless steel, this robust unit is suited to schools, correctional facilities, nightclubs, public ablutions, and other high-traffic settings. Its seamless, one-piece construction features smooth radius edges for enhanced user comfort and hygiene. The brushed satin finish delivers a tamper-resistant, easy-to-clean surface. Suitable for both retrofit and new installations, it includes seat-mounting holes for standard toilet seats. The pedestal is securely floor-mounted via pre-drilled 6 mm holes in the base flanges. It is available in P-Trap (horizontal outlet) and S-Trap (vertical outlet) variants, each with a 102 mm outside diameter outlet suitable for direct connection to 110 mm PVC soil pipes. An integral flushing rim ensures efficient waste removal, while the back-entry flush pipe inlet (compatible with rubber sealing bungs) supports various flushing systems, including surface-mounted, low-level, and high-level cisterns (in plastic or stainless steel), or flush valves. Toilet seats and flushing systems are available upon request and must be specified.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17642. Stainless Steel Pedestal Toilets. Trap Type: P-Trap, S-Trap. Constructed from 1.2 mm thick Grade 304 stainless steel, this robust unit is suited to schools, correctional facilities, nightclubs, public ablutions, and other high-traffic settings. The pedestal is securely floor-mounted via pre-drilled 6 mm holes in the base flanges.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17642(P)	Floor Mounted Wc Pan S/steel 304 To B17642(p) P-trap	Trap Type: P-Trap
B17642(S)	FLOOR MOUNTED WC PAN S/STEEL 304 S-TRAP	Trap Type: S-Trap

03 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images




PRODUCT IMAGE




PRODUCT IMAGE



PRODUCT IMAGE

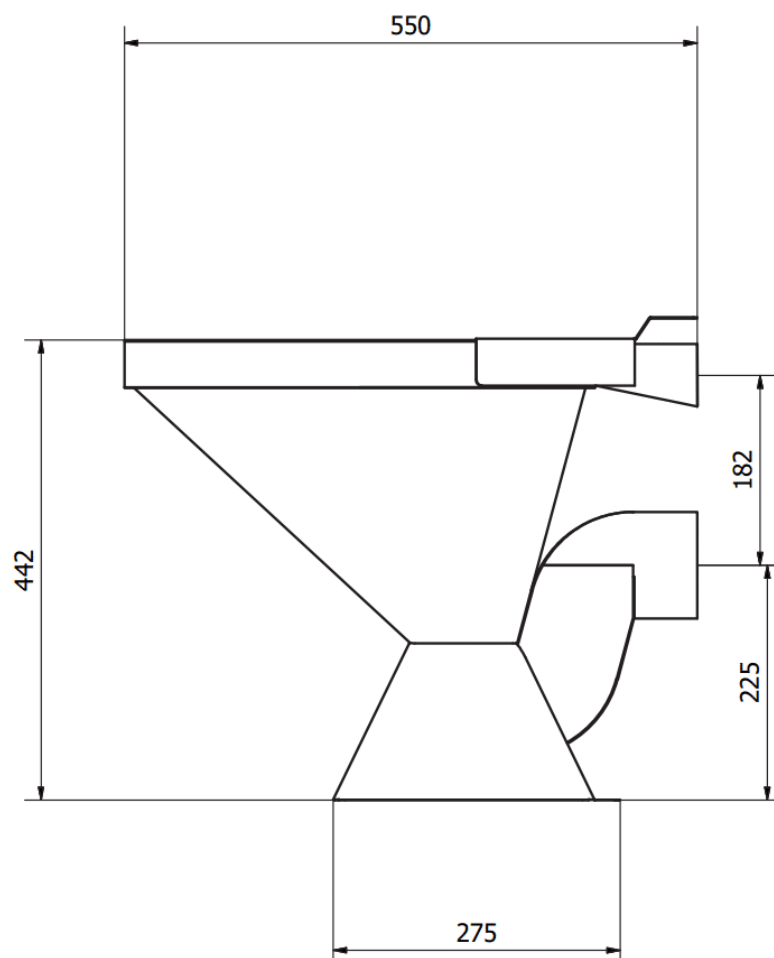

PRODUCT IMAGE

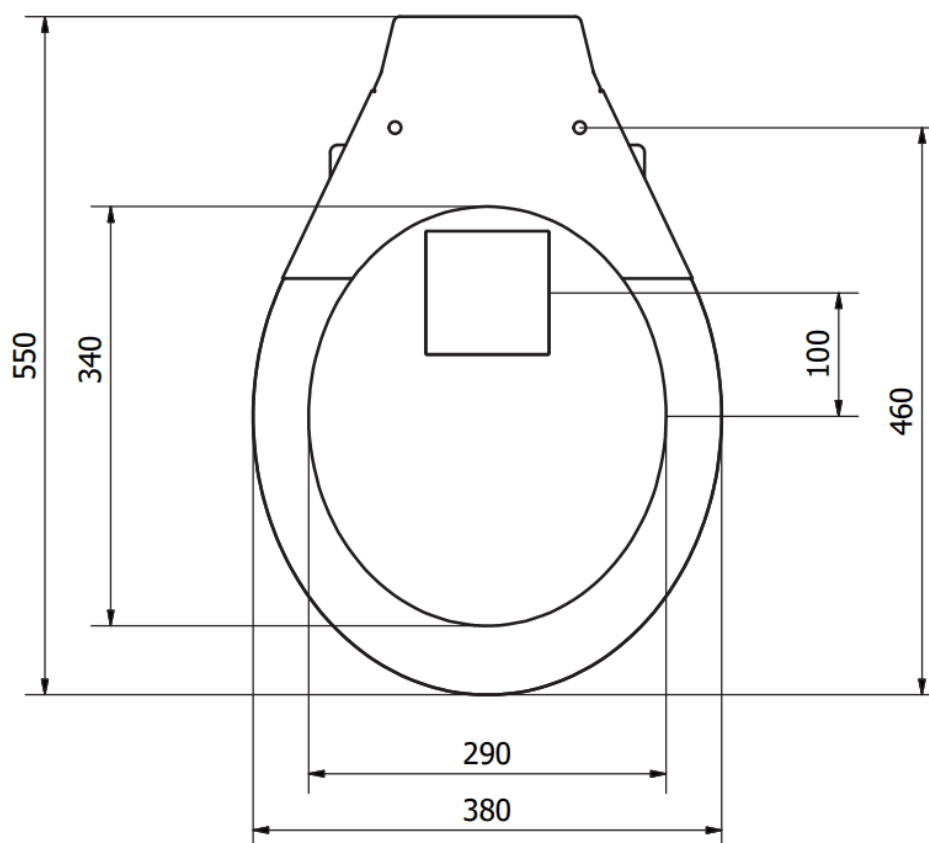

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.