PRODUCT RANGE SPECIFICATION

B22328(G1) – Medical Wash Hand Basin



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B22328(G1){PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b22328g1-medical-wash-hand-basin#specifications

01 Product description and specification

Product description

Wall-mounted Grade 304 medical wash hand basin with a 150 mm splashback and pre-punched medical-mixer tap holes. Available with front support legs.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B22328(G1) wash hand basin in 1.2 mm Grade 304 stainless steel, 500 mm (L) x 420 mm (W), with a 440 mm (L) x 310 mm (W) x 150 mm (D) bowl, 150 mm rear splashback and 26 mm turndown edge. Two Ø22 mm tap holes at 180 mm centres in the splashback; 40 mm waste outlet. Include 25 x 25 mm square tubular stainless steel gallows brackets with a 215 mm vertical mounting-hole pitch. Basin and bracket assembly height 500 mm; installed height to suit the installation. Front support legs with adjustable feet to match the selected configuration. Borras medical mixer optional and supplied separately. Waste fitting, trap and pipework to be specified.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Material Thickness	1.2	mm	The thickness of the material used for the item's primary construction. The thickness of individual components may vary.
Length	500	mm	The length of the item typically as measured from left to right.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Width	420	mm	The width of the item typically as measured from front to back.
Number of Bowls	1	–	–
Bowl Length	440	mm	The length of the bowl typically as measured from left to right.
Bowl Width	310	mm	–
Bowl Depth	150	mm	–
Splashback Height	150	mm	Height of the splashback above the tabletop or working surface.
Mounting Type	Stainless Steel Gallows Brackets	–	–
Basin and Bracket Height	500	mm	Vertical dimension from the top of the splashback to the bottom of the wall-mounting brackets. The installed height above the floor is set during installation.
Turndown Edge	26	mm	–
Bracket Tube Section	25 × 25mm square stainless steel tube	–	–
Bracket Mounting Hole Pitch	215	mm	Vertical centre-to-centre spacing of the mounting holes on each wall bracket.
Waste Outlet Diameter	40	mm	–
Mounting Hole Diameter	10	mm	Diameter of the pre-cut mounting holes.
Tap Hole Provision	Two Ø22mm holes at 180mm centres in the splashback	–	Two pre-punched tap holes in the splashback for a separately selected medical mixer.
Tapware Supply	Borras medical mixer optional; not included	–	–

03 Configuration options

Front Support Legs	No; Yes

Options vary by model; not every combination is available. Use the product page to select a model.

04 Functional features

01 Grade 304 Stainless Steel
Manufactured from 1.2 mm Grade 304 stainless steel.

02 Single Handwashing Bowl
440 mm x 310 mm x 150 mm deep bowl in a 500 mm x 420 mm basin.

03 150 mm Rear Splashback
Extended rear splashback helps protect the wall behind the handwashing point.

04 Pre-Punched Medical Mixer Tap Holes
Two Ø22 mm holes at 180 mm centres in the splashback. The medical mixer is selected separately.

05 Stainless Steel Gallows Brackets
Wall-mounting brackets use 25 x 25 mm square tube, with Ø10 mm mounting holes at a 215 mm vertical pitch.

06 Front Support Leg Configuration
Choose the SL configuration for additional stainless steel front support legs with adjustable feet.

05 Application information

Intended applications	General Handwashing, Hospital Sinks, Laboratory Work Areas
Industries	Clinical Laboratories, Hospitals & Clinics, Pharmaceutical Manufacturing, Research Laboratories, Veterinary Services

06 Supply and support

Typical lead time	10–15 working days
Warranty	24 months

07 Frequently asked questions

Where can this basin be used?
Medical and clinical handwashing points in hospitals, clinics, dental surgeries, veterinary practices and laboratory areas. Tapware should be selected for the intended washing task.

What are the basin and bowl dimensions?
The basin is 500 mm long x 420 mm wide. The bowl measures 440 mm long x 310 mm wide x 150 mm deep. Both support configurations use the same basin.

What material and splashback are provided?
1.2 mm Grade 304 stainless steel, with a 150 mm rear splashback and 26 mm turndown edge.

What is the difference between G1 and G1-SL?
B22328(G1) includes wall-mounting gallows brackets without front support legs. B22328(G1-SL) adds stainless steel front support legs with adjustable feet.


Is the 500 mm drawing height the installed basin height?
No. The 500 mm vertical dimension runs from the top of the splashback to the bottom of the wall-mounting brackets. The height above the floor is set during installation.

Is the medical mixer included?
No. The Borras medical mixer with wall and deck mounting kit is an optional accessory, priced and supplied separately from the basin. Select it with the basin when required.

What tap holes and drainage provision are supplied?
The splashback has two Ø22 mm tap holes at 180 mm centres. The basin has a 40 mm waste outlet. Specify the waste fitting, trap and connecting pipework to suit the installation.


How is the basin fixed to the wall?
The included gallows brackets use 25 x 25 mm square stainless steel tube. The Ø10 mm mounting holes have a 215 mm vertical pitch. Select suitable wall fixings and the mounting height for the installation.

Product drawings and images

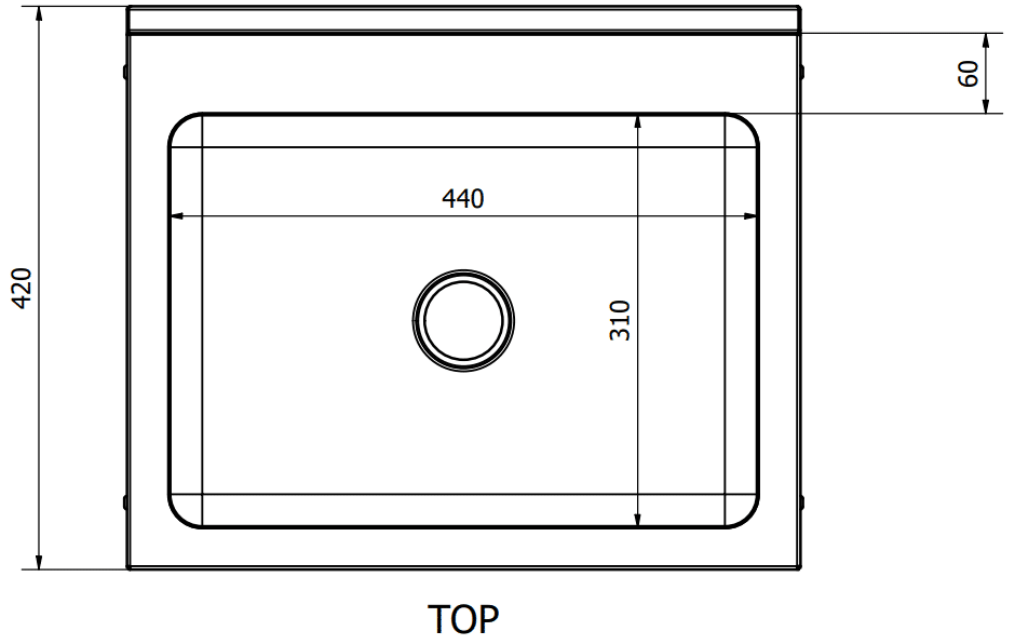


TOP

PRODUCT IMAGE

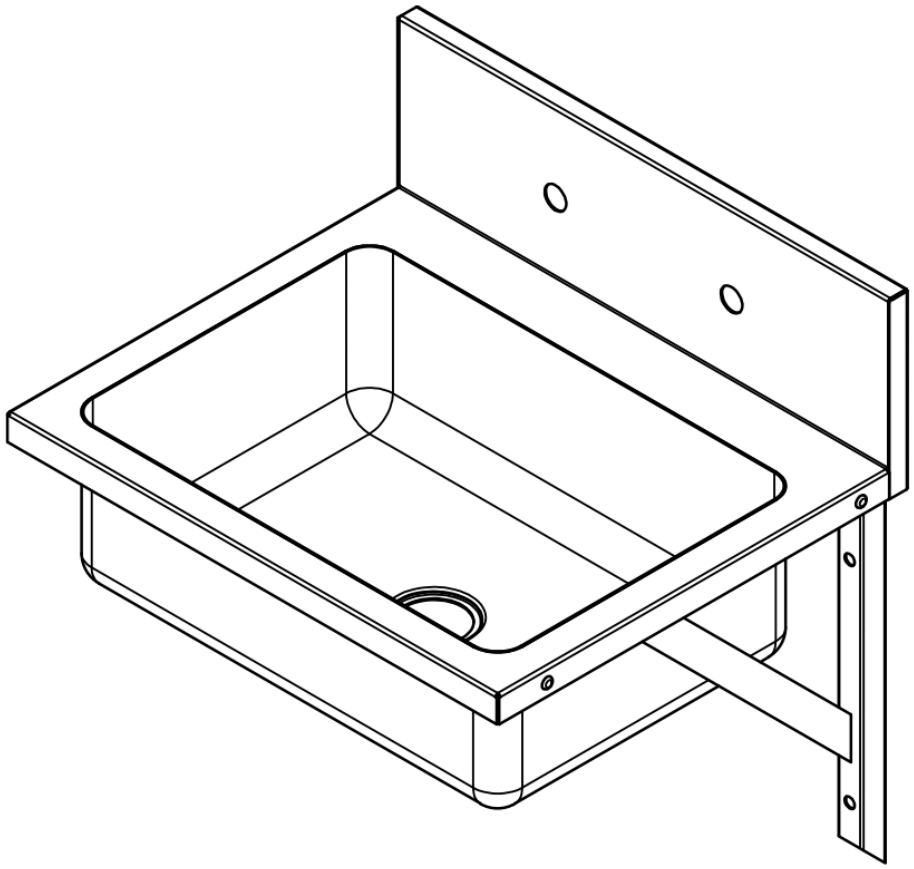


TOP RIGHT

PRODUCT IMAGE

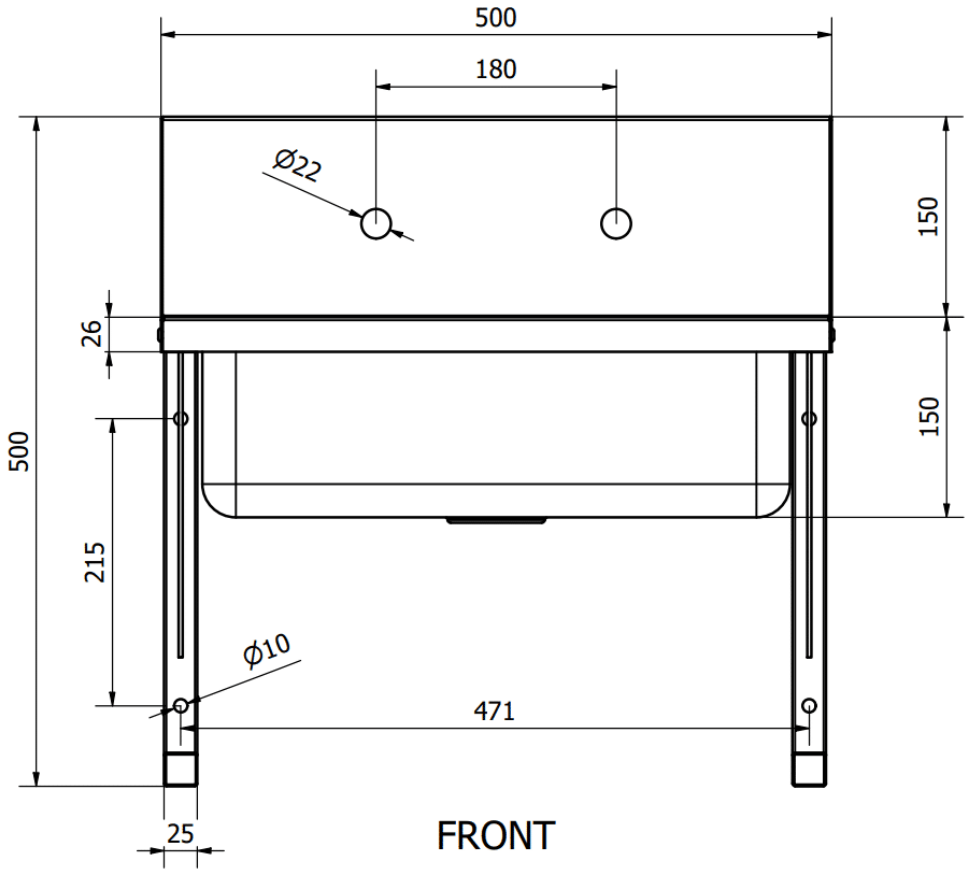

PRODUCT IMAGE

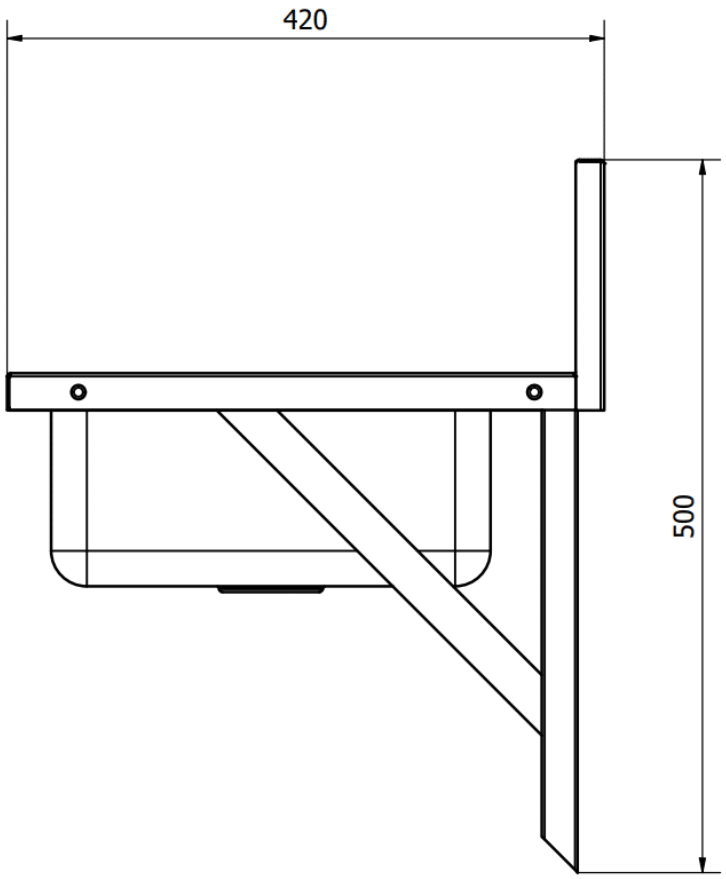


RIGHT

PRODUCT IMAGE



PRODUCT IMAGE

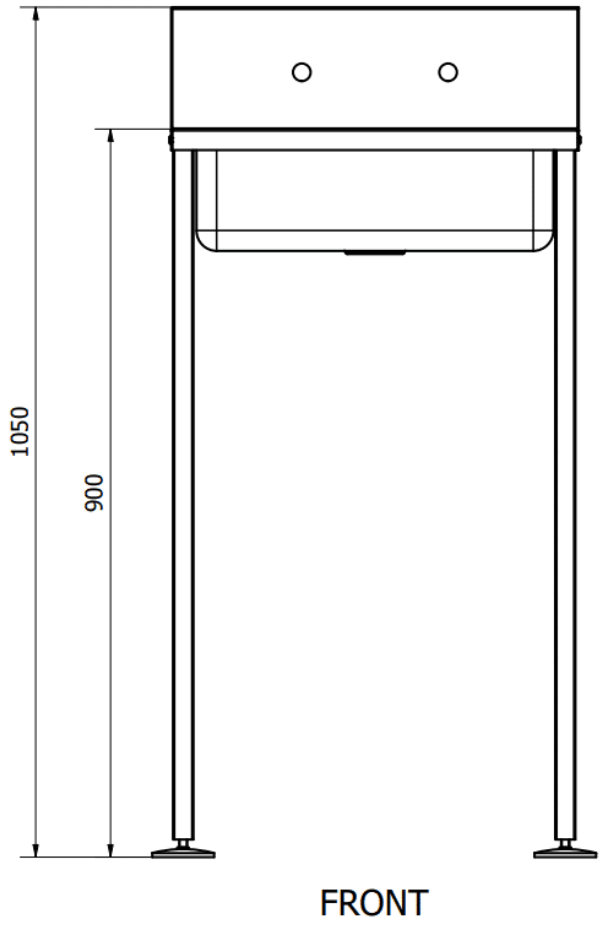

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.